
Onka®

Choice Of Professionals



www.Onka.com.tr



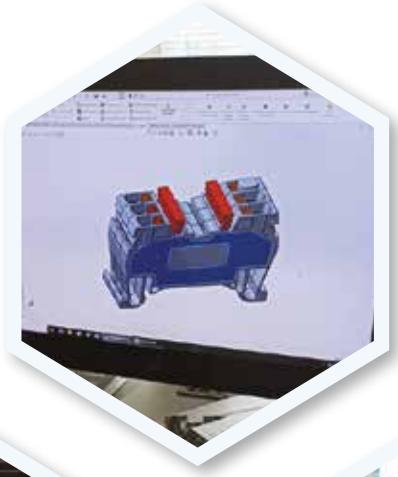













www.Onka.com.tr

Esteemed Customer,

We Onka Electrical Materials Industry & Trade Ltd. Co. deem quality in manufacturing, economy and service as our essential principles on the base of our experience and knowledge we gained since 1986; and we have reached our current product range by non-stop new product additions into our portfolio. We deem it as our goal to diversify our product range in accordance with your wishes and demands.

We Elektrokar Electrical Materials Marketing Industry & Trade Ltd. Co. share with you our experience and knowledge on marketing and supply. Considering your high interest and demand for our catalogues and price list, we continue such activities by ever-developing it.

We would like to thank to our solution partners and firms, to which we are an agency, for their assistance.

We continue our mission to supply you with electrical components both in domestic and foreign markets. Our studies on this matter continue.

We would like to thank you for choosing us as your supplier, and we wish all the best for you.

Yours Sincerely,
General Manager
Mechanical Engineer
Kamil KARACA

Proudly Collaborating With 80+ Countries

Onka®

ALGERIA
CZECH REPUBLIC
DUBAI
INDONESIA
ESTONIA
ETHIOPIA
MOROCCO
PALESTINE
FINLAND
URUGUAY

AFGHANISTAN
GERMANY
AMERICA
ALBANIA
AZERBAIJAN
BAHRAIN
BANGLADESH
BELGIUM
BELARUS
BOSNIA AND HERZEGOVINA
BULGARIA

FRANCE
S.AFRICA
GHANA
GUATEMALA
SOUTH AFRICA
GEORGIA
INDIA
NETHERLANDS
HONG KONG



THAILAND
TUNISIA
TURKEY
TURKMENISTAN
UGANDA
UKRAINE
JORDAN
VIETNAMESE
YEMEN
GREECE
AUSTRALIA

OMAN
IRAQ
ENGLAND
IRAN
IRELAND
SPAIN
ISRAEL
SWEDEN
ITALY

PAKISTAN
PERU
POLAND
PORTUGAL
ROMANIA
RUSSIA
SAUDI ARABIA
SENEGAL
SERBIA
SINGAPORE
SRI LANKA
SUDAN
SYRIA
CHILE


HUNGARY
MACEDONIA
MALDIVES
MALAYSIA
MALI
MAURITIUS
MEXICO
EGYPT
MOLDOVA
NIGERIA
UZBEKISTAN

CAMEROON
QATAR
KAZAKHSTAN
KENYA
CYPRUS
COLOMBIA
KOSOVO
KUWAIT
LATVIA
LIBYA
LEBANON
BURKINA FASO
IVORY COAST


www.onka.com.tr

INDEX


MRK Series Screw Connection & Hybrid Connection Rail Terminal Blocks 9

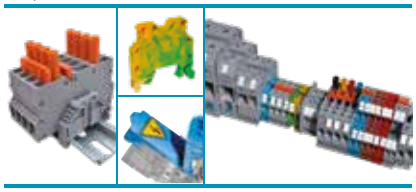


OPK Series Push in Connection & PCB Connection Rail Terminal Blocks 41

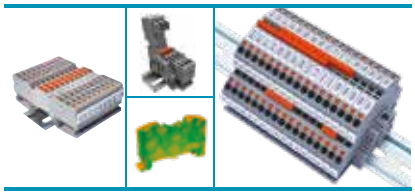

MPK Series Push-In Connection Mini Terminal Blocks 60

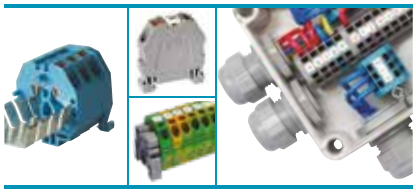

Electronic Terminal Blocks Relay Modules 64

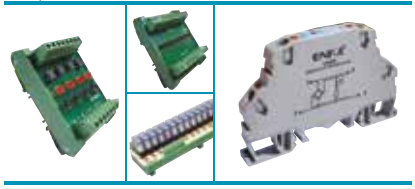

Terminal Strips Socket - Connectors Steatite Connectors - Other Terminals 70




Rail Mounting Sockets 84




Polyamide Cable Gland 86




Cable Trunking 95

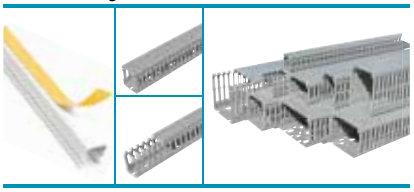

Distribution Units 98

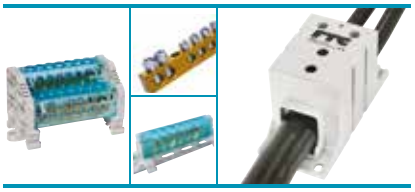

W Automat Busbars 118

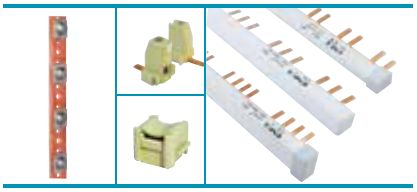

Mounting Din Rails 123



Cable Lugs - Butt Connectors 128



Current Transformers 139



Insulators 143



Cord end Terminals 150



Cable Ties - Heat Shrinks 161





Panel Accessories 165




Markers and Printers 169



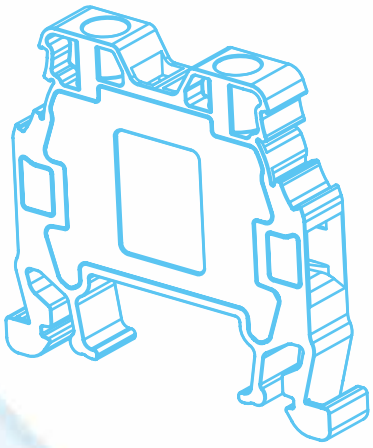

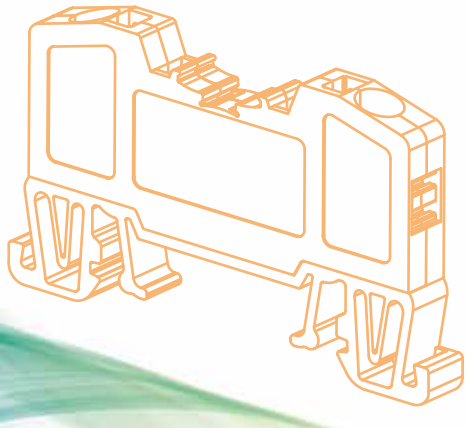


Onka®

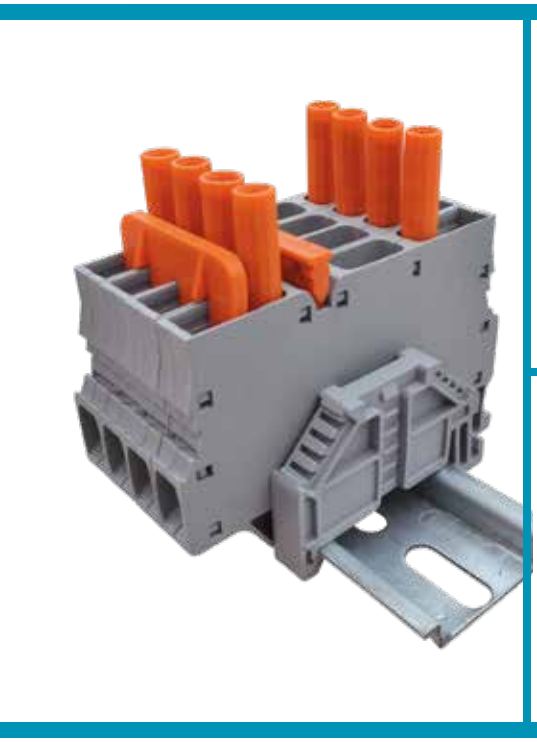





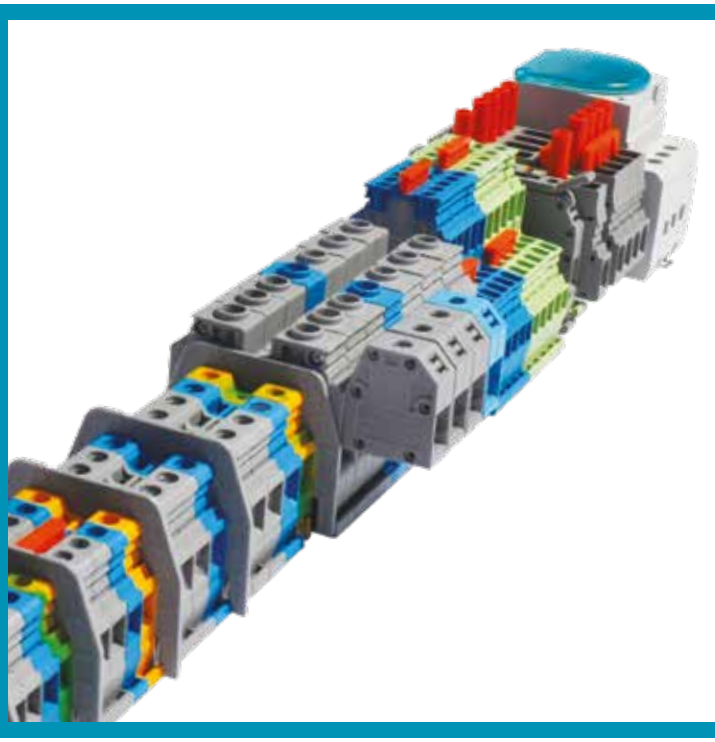

MRK SERIES SCREW CONNECTION RAIL TERMINAL BLOCKS

Technical Features ;

- *Does not require final plate (Both sides are closed), provides cost saving and better isolation*
- *Symmetrical (Mountable to rail at both directions)*
- *Provides opportunity to assemble cable section from 0,06 mm² to 120 mm²*
- *Labelling system appropriate for roll labeling*
- *Double sided bridging opportunity*
- *Isolated comb bridge can be used from 1,5 mm² to 10 mm²*
- *Screw system is flat headed for sections 10 mm² to 35 mm²*
- *In 50 mm² and following sections, the screw system is allen headed*
- *MRK Series stopper can be used both as group label or end label*


Range of Products;

- *MRK Series standard rail terminal blocks*
- *MRK Series double rail terminal blocks*
- *MRK Series fused rail terminal blocks*
- *MRK Series knife rail terminal blocks*
- *MRK Series test disconnect terminal blocks*
- *MRK Series earth rail terminal blocks*
- *MRK and OPK Series stoppers*
- *MRK Series separation plate*
- *MRK Series Cross Connections*
- *MRK Series stud terminal blocks for cable lugs*

MRK SERIES




•In MRK Series, the roll label system can be applied to the products from 1.5 mm^2 to 35 mm^2 cross sections




• The main body of which end plate is embedded, is manufactured as monolithic




• For MRK Series a new cross connection system is used from 1.5 mm^2 up to 10 mm^2

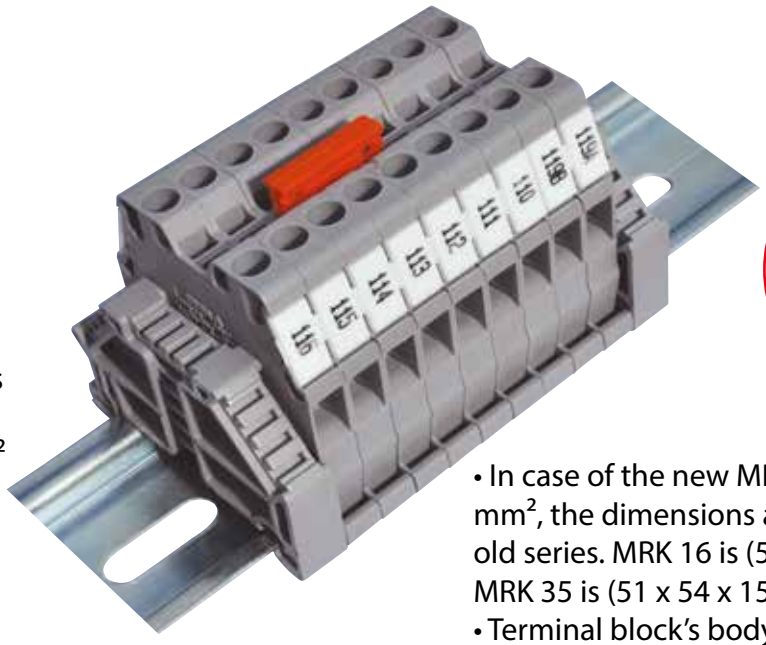



• In case of the new MRK 16 mm^2 and 35 mm^2, the dimensions are smaller than the old series. MRK 16 is (51 x 54 x 12) mm, MRK 35 is (51 x 54 x 15) mm
• Terminal block's body and end plate are connected within 4 steel screws





• Due to the U form at the bottom of the sleeve system of MRK 6-10-16-25 and 35, much contact of the sleeve is provided to the cable


• MRK 16 and 35 mm^2, the leg parts of terminal can be locked more better because of the same width as the terminal



MOUNTABLE RAIL TYPES







HRK HYBRID TERMINAL BLOCKS




HRK 2,5

New Code: 1040002

Old Code: 0362



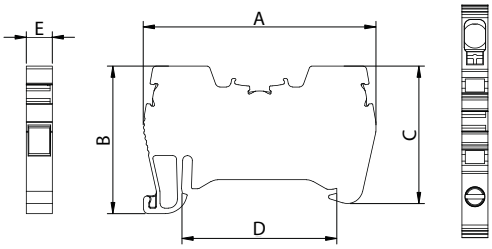

Dimension (mm)	A	B	C	D	E
	52	33	30,75	34,5	5,8

MATERIAL			
Body	PA6.6	Spring	Stainless Steel
Bridge	Copper	Temp.	-40 ºC, +140 ºC
Contact	CK45 Steel	Cable Strip L.	10 mm
Screw	Steel	Torque	0,4 Nm

DATA	TSE / CE
Voltage	750 V
Current	24 A
Section	2,5 mm²
Norm	EN-60947-7-1

COLOURS

	V2	V2	V0	V0	
COLOUR	New Code	Old Code	New Code	Old Code	Pcs.
GREY	1040002	0362	1040022	0332	100
CREAM	1040003		1040023		100
BLACK	1040004		1040024		100
BLUE	1040005		1040025		100
BROWN	1040006		1040026		100
RED	1040007		1040027		100
YELLOW	1040008		1040028		100
GREEN	1040009		1040029		100

ACCESSORIES

	New Code	Old Code	Section	Pcs.	See Page
Cross Connection	1060106	1925	2,5 / 2	100	Pg. 37
	1060107	1926	2,5 / 3	100	Pg. 37
	1060108	1927	2,5 / 4	75	Pg. 37
	1060109	1928	2,5 / 10	30	Pg. 37
	1060110	1929	2,5 / 20	20	Pg. 37
Stopper	1060002	1202		100	Pg. 35
	1060005	1212		100	Pg. 34
	1060014	1222		100	Pg. 35
Group Sticker	1060024	1232		100	Pg. 34

MARKING

	New Code	Old Code	See Page
Dekafix	1060192	4440	Pg. 173
	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175, 176
Roll Label	-	8943-S11	Pg. 169




HRK 6

New Code 1040012

Old Code 0372



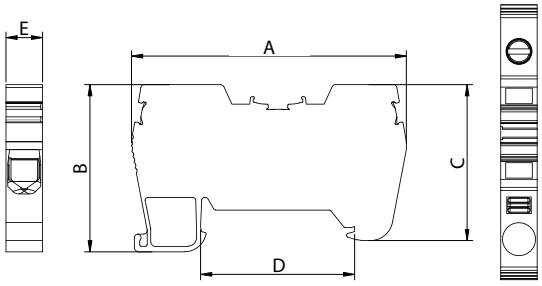

Dimension (mm)	A	B	C	D	E
	61,8	37,6	35	34,5	8,2

MATERIAL			
Body	PA6.6	Spring	Stainless Steel
Bridge	Copper	Temp.	-40 ºC, +140 ºC
Contact	CK45 Steel	Cable Strip L.	10 mm
Screw	Steel	Torque	0,4 Nm

DATA	TSE / CE
Voltage	750 V
Current	41 A
Section	6 mm²
Norm	EN-60947-7-1

COLOURS

	V2	V2	V0	V0	
COLOUR	New Code	Old Code	New Code	Old Code	Pcs.
GREY	1040012	0372	1040032	0342	100
CREAM	1040013		1040033		100
BLACK	1040014		1040034		100
BLUE	1040015		1040035		100
BROWN	1040016		1040036		100
RED	1040017		1040037		100
YELLOW	1040018		1040038		100
GREEN	1040019		1040039		100

ACCESSORIES

	New Code	Old Code	Section	Pcs.	See Page
Cross Connection	1060116	1935	6 / 2	100	Pg. 37
	1060117	1936	6 / 3	50	Pg. 37
	1060118	1937	6 / 4	50	Pg. 37
	1060119	1938	6 / 10	15	Pg. 37
	1060120	1939	6 / 20	10	Pg. 37
Stopper	1060002	1202		100	Pg. 35
	1060005	1212		100	Pg. 34
	1060014	1222		100	Pg. 35
Group Sticker	1060024	1232		100	Pg. 34

MARKING

	New Code	Old Code	See Page
Dekafix	1060188	2630	Pg. 173
	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175 -177
Roll Label	-	8943-S11	Pg. 169


MRK SERIES SCREW CONNECTION RAIL TERMINAL BLOCKS




MRK 1,5

New Code: 1010002

Old Code: 1002





Dimension (mm)	A	B	C	D	E
	40	40	34,5	36,5	5,1

MATERIAL			
Body	PA6.6	Temp.	-40 ºC, +140 ºC
Bridge	Copper	Cable Strip L.	10 mm
Contact	CK45 Steel	Torque	0,4 Nm
Screw	Steel		

DATA	TSE / CE	UL
Voltage	750 V	300 V
Current	17.5 A	17.5 A
Section	1,5 mm^2	14 AWG
Norm	EN-60947-7-1	UL 1059

COLOURS

	V2	V2	V0	V0	
COLOUR	New Code	Old Code	New Code	Old Code	Pcs.
GREY	1010002	1002	1010151	0752	100
CREAM	1010003	1003			100
BLACK	1010004	1004			100
BLUE	1010005	1005			100
BROWN	1010006	1006			100
RED	1010007	1007			100
YELLOW	1010008	1008			100
GREEN	1010009	1009	1010152	0759	100

ACCESSORIES

Cross Connection	New Code	Old Code	Section	Pcs.	See Page
	1060101	1920	1,5 / 2	100	Pg. 37
	1060102	1921	1,5 / 3	100	Pg. 37
	1060103	1922	1,5 / 4	100	Pg. 37
	1060104	1923	1,5 / 10	30	Pg. 37
	1060105	1924	1,5 / 20	20	Pg. 37
Stopper	1060002	1202		100	Pg. 35
	1060005	1212		100	Pg. 34
	1060014	1222		100	Pg. 35
Group Sticker	1060024	1232		100	Pg. 34

MARKING


	New Code	Old Code	See Page
Dekafix	1060198	5443	Pg. 173
	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175
Roll Label	-	8943-S11	Pg. 169




MRK 2,5

New Code: 1010012

Old Code: 1012





Dimension (mm)	A	B	C	D	E
	40	40	34,5	36,5	5,9

MATERIAL			
Body	PA6.6	Temp.	-40 ºC, +140 ºC
Bridge	Copper	Cable Strip L.	10 mm
Contact	CK45 Steel	Torque	0,4 Nm
Screw	Steel		

DATA	TSE / CE	UL
Voltage	750 V	300 V
Current	24 A	24 A
Section	2,5 mm^2	12 AWG
Norm	EN-60947-7-1	UL 1059

COLOURS

	V2	V2	V0	V0	
COLOUR	New Code	Old Code	New Code	Old Code	Pcs.
GREY	1010012	1012	1010153	0762	100
CREAM	1010013	1013	1010154	0763	100
BLACK	1010014	1014	1010155	0764	100
BLUE	1010015	1015	1010156	0765	100
BROWN	1010016	1016	1010157	0766	100
RED	1010017	1017	1010158	0767	100
YELLOW	1010018	1018	1010159	0768	100
GREEN	1010019	1019	1010160	0769	100

ACCESSORIES

Cross Connection	New Code	Old Code	Section	Pcs.	See Page
	1060106	1925	2,5 / 2	100	Pg. 37
	1060107	1926	2,5 / 3	100	Pg. 37
	1060108	1927	2,5 / 4	75	Pg. 37
	1060109	1928	2,5 / 10	30	Pg. 37
	1060110	1929	2,5 / 20	20	Pg. 37
Stopper	1060002	1202		100	Pg. 35
	1060005	1212		100	Pg. 34
	1060014	1222		100	Pg. 35
Group Sticker	1060024	1232		100	Pg. 34

MARKING

	New Code	Old Code	See Page
Dekafix	1060192	4440	Pg. 173
	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175, 176
Roll Label	-	8943-S11	Pg. 169

MRK SERIES SCREW CONNECTION RAIL TERMINAL BLOCKS




MRK 4

New Code: 1010022

Old Code: 1022





Dimension (mm)	A	B	C	D	E
	40	40	34,5	36,5	6,7

MATERIAL			
Body	PA6.6	Temp.	-40 ºC, +140 ºC
Bridge	Copper	Cable Strip L.	10 mm
Contact	CK45 Steel	Torque	0,5 Nm
Screw	Steel		

DATA	TSE / CE	UL
Voltage	750 V	300 V
Current	32 A	32 A
Section	4 mm²	10 AWG
Norm	EN-60947-7-1	UL 1059

COLOURS

	V2	V2	V0	V0	
COLOUR	New Code	Old Code	New Code	Old Code	Pcs.
GREY	1010022	1022	1010162	0772	100
CREAM	1010023	1023	1010163	0773	100
BLACK	1010024	1024	1010164	0774	100
BLUE	1010025	1025	1010165	0775	100
BROWN	1010026	1026	1010166	0776	100
RED	1010027	1027	1010167	0777	100
YELLOW	1010028	1028			100
GREEN	1010029	1029			100

ACCESSORIES

Cross Connection	New Code	Old Code	Section	Pcs.	See Page
	1060111	1930	4 / 2	100	Pg. 37
	1060112	1931	4 / 3	100	Pg. 37
	1060113	1932	4 / 4	50	Pg. 37
	1060114	1933	4 / 10	30	Pg. 37
	1060115	1934	4 / 20	20	Pg. 37
Stopper	1060002	1202		100	Pg. 35
	1060005	1212		100	Pg. 34
	1060014	1222		100	Pg. 35
Group Sticker	1060024	1232		100	Pg. 34

MARKING

	New Code	Old Code	See Page
Dekafix	1060190	4390	Pg. 173
	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175 - 177
Roll Label	-	8943-S11	Pg. 169




MRK 6

New Code: 1010032

Old Code: 1032





Dimension (mm)	A	B	C	D	E
	40	40	34,5	36,5	8,2

MATERIAL			
Body	PA6.6	Temp.	-40 ºC, +140 ºC
Bridge	Copper	Cable Strip L.	12 mm
Contact	CK45 Steel	Torque	0,8 Nm
Screw	Steel		

DATA	TSE / CE	UL
Voltage	750 V	300 V
Current	41 A	41 A
Section	6 mm²	8 AWG
Norm	EN-60947-7-1	UL 1059

COLOURS

	V2	V2	V0	V0	
COLOUR	New Code	Old Code	New Code	Old Code	Pcs.
GREY	1010032	1032	1010168	0782	100
CREAM	1010033	1033	1010169	0783	100
BLACK	1010034	1034	1010170	0784	100
BLUE	1010035	1035	1010171	0785	100
BROWN	1010036	1036	1010172	0786	100
RED	1010037	1037	1010173	0787	100
YELLOW	1010038	1038			100
GREEN	1010039	1039			100

ACCESSORIES

Cross Connection	New Code	Old Code	Section	Pcs.	See Page
	1060116	1935	6 / 2	100	Pg. 37
	1060117	1936	6 / 3	50	Pg. 37
	1060118	1937	6 / 4	50	Pg. 37
	1060119	1938	6 / 10	15	Pg. 37
	1060120	1939	6 / 20	10	Pg. 37
Stopper	1060002	1202		100	Pg. 35
	1060005	1212		100	Pg. 34
	1060014	1222		100	Pg. 35
Group Sticker	1060024	1232		100	Pg. 34

MARKING

	New Code	Old Code	See Page
Dekafix	1060188	2630	Pg. 173
	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175 -177
Roll Label	-	8943-S11	Pg. 169

MRK SERIES SCREW CONNECTION RAIL TERMINAL BLOCKS




MRK 10

New Code: 1010042

Old Code: 1042





Dimension (mm)	A	B	C	D	E
	40	40	34,5	36,5	9,5

MATERIAL			
Body	PA6.6	Temp.	-40 ºC, +140 ºC
Bridge	Copper	Cable Strip L.	12 mm
Contact	CK45 Steel	Torque	0,8 Nm
Screw	Steel		

DATA	TSE / CE	UL
Voltage	750 V	600 V
Current	57 A	57 A
Section	10 mm²	8 AWG
Norm	EN-60947-7-1	UL 1059

COLOURS


	V2	V2	V0	V0	
COLOUR	New Code	Old Code	New Code	Old Code	Pcs.
GREY	1010042	1042	1010174	0792	100
CREAM	1010043	1043	1010175	0793	100
BLACK	1010044	1044	1010176	0794	100
BLUE	1010045	1045	1010177	0795	100
BROWN	1010046	1046	1010178	0796	100
RED	1010047	1047	1010179	0797	100
YELLOW	1010048	1048			100
GREEN	1010049	1049			100

ACCESSORIES

Cross Connection	New Code	Old Code	Section	Pcs.	See Page
	1060121	1940	10 / 2	100	Pg. 37
	1060122	1941	10 / 3	50	Pg. 37
	1060123	1942	10 / 4	50	Pg. 37
	1060124	1943	10 / 10	15	Pg. 37
	1060125	1944	10 / 20	10	Pg. 37
Stopper	1060002	1202		100	Pg. 35
	1060005	1212		100	Pg. 34
	1060014	1222		100	Pg. 35
Group Sticker	1060024	1232		100	Pg. 34

MARKING


	New Code	Old Code	See Page
Dekafix	1060188	2630	Pg. 173
	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175 -177
Roll Label	-	8943-S11	Pg. 169




MRK 16

New Code: 1010052

Old Code: 1132





Dimension (mm)	A	B	C	D	E
	51	54	34,5	51	12

MATERIAL			
Body	PA6.6	Temp.	-40 ºC, +140 ºC
Bridge	Copper	Cable Strip L.	18 mm
Contact	CK45 Steel	Torque	2,0 Nm
Screw	Steel		

DATA	TSE / CE	UL
Voltage	750 V	600 V
Current	76 A	63 A
Section	16 mm²	6 AWG
Norm	EN-60947-7-1	UL 1059

COLOURS

	V2	V2	V0	V0	
COLOUR	New Code	Old Code	New Code	Old Code	Pcs.
GREY	1010052	1132	1010209	0882	50
CREAM	1010053	1133		0883	50
BLACK	1010054	1134		0884	50
BLUE	1010055	1135		0885	50
BROWN	1010056	1136		0886	50
RED	1010057	1137		0887	50
YELLOW	1010058	1138			50
GREEN	1010059	1139			50


ACCESSORIES

Cross Connection	New Code	Old Code	Section	Pcs.	See Page
	1060152	2257	16 / 2	10	Pg. 37
	1060153	2258	16 / 3	10	Pg. 37
	1060154	2259	16 / 4	10	Pg. 37
	1060155	2260	16 / 5	10	Pg. 37
	1060160	2265	16 / 10	10	Pg. 37
Stopper	1060002	1202		100	Pg. 35
	1060005	1212		100	Pg. 34
	1060014	1222		100	Pg. 35
Group Sticker	1060024	1232		100	Pg. 34

MARKING

	New Code	Old Code	See Page
Dekafix	1060188	2630	Pg. 173
	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175 -177
Roll Label	-	8943-S11	Pg. 169


MRK SERIES SCREW CONNECTION RAIL TERMINAL BLOCKS




MRK 25

New Code: 1010062

Old Code: 0302





With Non - Insulated Cord End Terminals

Dimension (mm)	A	B	C	D	E
	58	63,2	34,5	61,2	12

MATERIAL			
Body	PA6.6	Temp.	-40 ºC, +140 ºC
Bridge	Copper	Cable Strip L.	18 mm
Contact	CK45 Steel	Torque	2,0 Nm
Screw	Steel		

DATA	TSE / CE
Voltage	750 V
Current	101 A
Section	25 mm²
Norm	EN-60947-7-1

COLOURS


	V2	V2	V0	V0	
COLOUR	New Code	Old Code	New Code	Old Code	Pcs.
GREY	1010062	0302	1010180	0802	50
CREAM	1010063	0303	1010181		50
BLACK	1010064	0304	1010182		50
BLUE	1010065	0305	1010183		50
BROWN	1010066	0306	1010184		50
RED	1010067	0307	1010185		50
YELLOW	1010068	0308			50
GREEN	1010069	0309			50

ACCESSORIES

	New Code	Old Code	Section	Pcs.	See Page
Cross Connection	1060152	2257	16 / 2	10	Pg. 37
	1060153	2258	16 / 3	10	Pg. 37
	1060154	2259	16 / 4	10	Pg. 37
	1060155	2260	16 / 5	10	Pg. 37
	1060160	2265	16 / 10	10	Pg. 37
Stopper	1060002	1202		100	Pg. 35
	1060005	1212		100	Pg. 34
	1060014	1222		100	Pg. 35
Group Sticker	1060024	1232		100	Pg. 34

MARKING


	New Code	Old Code	See Page
Dekafix	1060188	2630	Pg. 173
	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175 -177
Roll Label	-	8943-S11	Pg. 169




MRK 35 (HIGH)

New Code: 1010082

Old Code: 1062





Dimension (mm)	A	B	C	D	E
	58	63,2	34,5	61,2	15

MATERIAL			
Body	PA6.6	Temp.	-40 ºC, +140 ºC
Bridge	Copper	Cable Strip L.	18 mm
Contact	CK45 Steel	Torque	2,0 Nm
Screw	Steel		

DATA	TSE / CE
Voltage	750 V
Current	125 A
Section	35 mm²
Norm	EN-60947-7-1

COLOURS

	V2	V2	V0	V0	
COLOUR	New Code	Old Code	New Code	Old Code	Pcs.
GREY	1010082	1062	1010186	0812	30
CREAM	1010083	1063	1010187	0813	30
BLACK	1010084	1064	1010188	0814	30
BLUE	1010085	1065	1010189	0815	30
BROWN	1010086	1066	1010190	0816	30
RED	1010087	1067	1010191	0817	30
YELLOW	1010088	1068	1010192	0818	30
GREEN	1010089	1069	1010193	0819	30


ACCESSORIES

	New Code	Old Code	Section	Pcs.	See Page
Cross Connection	1060161	2266	35 / 2	10	Pg. 37
	1060162	2267	35 / 3	10	Pg. 37
	1060163	2268	35 / 4	10	Pg. 37
	1060164	2269	35 / 5	10	Pg. 37
	1060169	2274	35 / 10	10	Pg. 37
Stopper	1060002	1202		100	Pg. 35
	1060005	1212		100	Pg. 34
	1060014	1222		100	Pg. 35
Group Sticker	1060024	1232		100	Pg. 34

MARKING

	New Code	Old Code	See Page
Dekafix	1060188	2630	Pg. 173
	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175 -177
Roll Label	-	8943-S11	Pg. 169


MRK SERIES SCREW CONNECTION RAIL TERMINAL BLOCKS




MRK 50

New Code: 1010092

Old Code: 1072





Dimension (mm)	A	B	C	D	E
	64	78	34,5	74	18

MATERIAL			
Body	PA6.6	Temp.	-40 ºC, +140 ºC
Bridge	Copper	Cable Strip L.	18 mm
Contact	DKP	Torque	6,0 Nm
Screw	Steel		

DATA	TSE / CE	UL
Voltage	750 V	600 V
Current	150 A	100 A
Section	50 mm^2	AWG 1/O str
Norm	EN-60947-7-1	UL 1059

COLOURS

	V2	V2	V0	V0	
COLOUR	New Code	Old Code	New Code	Old Code	Pcs.
GREY	1010092	1072	1010194	0822	20
CREAM	1010093	1073	1010195	0823	20
BLACK	1010094	1074	1010196	0824	20
BLUE	1010095	1075	1010197	0825	20
BROWN	1010096	1076	1010198	0826	20
RED	1010097	1077	1010199	0827	20
YELLOW	1010098	1078	1010200	0828	20
GREEN	1010099	1079	1010201	0829	20

ACCESSORIES

	New Code	Old Code	See Page
Stopper	1060002	1202	Pg. 35
	1060005	1212	Pg. 34
	1060014	1222	Pg. 35
Group Sticker	1060024	1232	Pg. 34

MARKING


	New Code	Old Code	See Page
Dekafix	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175 -177




MRK 70

New Code: 1010102

Old Code: 1082





Dimension (mm)	A	B	C	D	E
	64	78	34,5	74	21

MATERIAL			
Body	PA6.6	Temp.	-40 ºC, +140 ºC
Bridge	Copper	Cable Strip L.	20 mm
Contact	DKP	Torque	6,0 Nm
Screw	Steel		

DATA	TSE / CE	UL
Voltage	750 V	600 V
Current	192 A	125 A
Section	70 mm^2	AWG 2/O str
Norm	EN-60947-7-1	UL 1059

COLOURS

	V2	V2	V0	V0	
COLOUR	New Code	Old Code	New Code	Old Code	Pcs.
GREY	1010102	1082	1010202	0832	20
CREAM	1010103	1083			20
BLACK	1010104	1084			20
BLUE	1010105	1085	1010203	0835	20
BROWN	1010106	1086			20
RED	1010107	1087			20
YELLOW	1010108	1088			20
GREEN	1010109	1089			20

ACCESSORIES

	New Code	Old Code	See Page
Stopper	1060002	1202	Pg. 35
	1060005	1212	Pg. 34
	1060014	1222	Pg. 35
Group Sticker	1060024	1232	Pg. 34

MARKING

	New Code	Old Code	See Page
Dekafix	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175 -177


MRK SERIES SCREW CONNECTION RAIL TERMINAL BLOCKS




MRK 95

New Code: 1010112

Old Code: 1092





Dimension (mm)	A	B	C	D	E
	75	88	34,5	83	23,8

MATERIAL			
Body	PA6.6	**Temp.**	-40 ºC, +140 ºC
Bridge	Copper	**Cable Strip L.**	20 mm
Contact	DKP	**Torque**	6,0 Nm
Screw	Steel		

DATA	TSE / CE
Voltage	1000 V
Current	232 A
Section	95 mm²
Norm	EN-60947-7-1

COLOURS					
	V2	V2	V0	V0	
COLOUR	**New Code**	**Old Code**	**New Code**	**Old Code**	**Pcs.**
GREY	**1010112**	1092	**1010204**	0842	**10**
CREAM	**1010113**	1093			**10**
BLACK	**1010114**	1094			**10**
BLUE	**1010115**	1095	**1010205**	0845	**10**
BROWN	**1010116**	1096			**10**
RED	**1010117**	1097			**10**
YELLOW	**1010118**	1098			**10**
GREEN	**1010119**	1099			**10**

ACCESSORIES			
	New Code	**Old Code**	**See Page**
Stopper	**1060002**	1202	Pg. 35
	1060005	1212	Pg. 34
	1060014	1222	Pg. 35
Group Sticker	**1060024**	1232	Pg. 34


MARKING			
	New Code	**Old Code**	**See Page**
Dekafix	**1060194**	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175 -177




MRK 120

New Code: 1010122

Old Code: 1102





Dimension (mm)	A	B	C	D	E
	75	88	34,5	83	26

MATERIAL			
Body	PA6.6	**Temp.**	-40 ºC, +140 ºC
Bridge	Copper	**Cable Strip L.**	20 mm
Contact	DKP	**Torque**	6,0 Nm
Screw	Steel		

DATA	TSE / CE
Voltage	1000 V
Current	269 A
Section	120 mm²
Norm	EN-60947-7-1

COLOURS					
	V2	V2	V0	V0	
COLOUR	**New Code**	**Old Code**	**New Code**	**Old Code**	**Pcs.**
GREY	**1010122**	1102	**1010206**	0852	**10**
CREAM	**1010123**	1103			**10**
BLACK	**1010124**	1104			**10**
BLUE	**1010125**	1105			**10**
BROWN	**1010126**	1106			**10**
RED	**1010127**	1107			**10**
YELLOW	**1010128**	1108			**10**
GREEN	**1010129**	1109			**10**

ACCESSORIES			
	New Code	**Old Code**	**See Page**
Stopper	**1060002**	1202	Pg. 35
	1060005	1212	Pg. 34
	1060014	1222	Pg. 35
Group Sticker	**1060024**	1232	Pg. 34

MARKING			
	New Code	**Old Code**	**See Page**
Dekafix	**1060194**	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175 -177

MRK SLIM SERIES SCREW CONNECTION RAIL TERMINAL BLOCKS




MRK SLIM 2,5

New Code: 1010132

Old Code: 0902





Dimension (mm)	A	B	C	D	E
	40	40	34,5	36,5	5,1

MATERIAL			
Body	PA6.6	**Temp.**	-40 ºC, +140 ºC
Bridge	Copper	**Cable Strip L.**	10 mm
Contact	CK45 Steel	**Torque**	0,4 Nm
Screw	Steel		

DATA	TSE / CE
Voltage	750 V
Current	24 A
Section	2,5 mm^2
Norm	EN-60947-7-1

COLOURS

	V2	V2	V0	V0	
COLOUR	**New Code**	**Old Code**	**New Code**	**Old Code**	**Pcs.**
GREY	**1010132**	0902	**1010207**	0862	**100**
CREAM	**1010133**	0903			**100**
BLACK	**1010134**	0904			**100**
BLUE	**1010135**	0905			**100**
BROWN	**1010136**	0906			**100**
RED	**1010137**	0907			**100**
YELLOW	**1010138**	0908			**100**
GREEN	**1010139**	0909			**100**

ACCESSORIES

Cross Connection	New Code	Old Code	Section	Pcs.	See Page
	1060101	1920	2,5 / 2	100	Pg. 37
	1060102	1921	2,5 / 3	100	Pg. 37
	1060103	1922	2,5 / 4	100	Pg. 37
	1060104	1923	2,5 / 10	30	Pg. 37
	1060105	1924	2,5 / 20	20	Pg. 37
Stopper	1060002	1202		100	Pg. 35
	1060005	1212		100	Pg. 34
	1060014	1222		100	Pg. 35
Group Sticker	1060024	1232		100	Pg. 34

MARKING

	New Code	Old Code	See Page
Dekafix	1060198	5443	Pg. 173
	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175
Roll Label	-	8943-S11	Pg. 169




MRK SLIM 4

New Code: 1010142

Old Code: 0912





Dimension (mm)	A	B	C	D	E
	40	40	34,5	36,5	5,9

MATERIAL			
Body	PA6.6	**Temp.**	-40 ºC, +140 ºC
Bridge	Copper	**Cable Strip L.**	10 mm
Contact	CK45 Steel	**Torque**	0,4 Nm
Screw	Steel		

DATA	TSE / CE
Voltage	750 V
Current	32 A
Section	4 mm^2
Norm	EN-60947-7-1

COLOURS

	V2	V2	V0	V0	
COLOUR	**New Code**	**Old Code**	**New Code**	**Old Code**	**Pcs.**
GREY	**1010142**	0912	**1010208**	0872	**100**
CREAM	**1010143**	0913			**100**
BLACK	**1010144**	0914			**100**
BLUE	**1010145**	0915			**100**
BROWN	**1010146**	0916			**100**
RED	**1010147**	0917			**100**
YELLOW	**1010148**	0918			**100**
GREEN	**1010149**	0919			**100**


ACCESSORIES

Cross Connection	New Code	Old Code	Section	Pcs.	See Page
	1060106	1925	4 / 2	100	Pg. 37
	1060107	1926	4 / 3	100	Pg. 37
	1060108	1927	4 / 4	75	Pg. 37
	1060109	1928	4 / 10	30	Pg. 37
	1060110	1929	4 / 20	20	Pg. 37
Stopper	1060002	1202		100	Pg. 35
	1060005	1212		100	Pg. 34
	1060014	1222		100	Pg. 35
Group Sticker	1060024	1232		100	Pg. 34


MARKING


	New Code	Old Code	See Page
Dekafix	1060192	4440	Pg. 173
	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175, 176
Roll Label	-	8943-S11	Pg. 169

MRK SERIES SCREW CONNECTION RAIL TERMINAL BLOCKS



MRK 35 (NEW)
Medium Size
New Code: 1010072
Old Code: 1142





Dimension (mm)	A	B	C	D	E
	50,7	54	34,5	51	15


MATERIAL			
Body	PA6.6	Temp.	-40 ºC, +140 ºC
Bridge	Copper	Cable Strip L.	18 mm
Contact	CK45 Steel	Torque	2,0 Nm
Screw	Steel		

DATA	TSE / CE
Voltage	750 V
Current	125 A
Section	35 mm²
Norm	EN-60947-7-1

COLOURS

	V2	V2	V0	V0	
COLOUR	New Code	Old Code	New Code	Old Code	Pcs.
GREY	1010072	1142	1010210	0892	30
CREAM	1010073	1143			30
BLACK	1010074	1144			30
BLUE	1010075	1145			30
BROWN	1010076	1146			30
RED	1010077	1147			30
YELLOW	1010078	1148			30
GREEN	1010079	1149			30

ACCESSORIES

	New Code	Old Code	Section	Pcs.	See Page
Cross Connection 	1060161	2266	35 / 2	10	Pg. 37
	1060162	2267	35 / 3	10	Pg. 37
	1060163	2268	35 / 4	10	Pg. 37
	1060164	2269	35 / 5	10	Pg. 37
	1060169	2274	35 / 10	10	Pg. 37
Stopper	1060002	1202		100	Pg. 35
	1060005	1212		100	Pg. 34
	1060014	1222		100	Pg. 35
Group Sticker	1060024	1232		100	Pg. 34

MARKING

	New Code	Old Code	See Page
Dekafix	1060188	2630	Pg. 173
	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175 -177
Roll Label	-	8943-S11	Pg. 169


MRK SERIES TRANSFER CONNECTORS



MRK
New Code: 1060056
Old Code: 1162



MRK
New Code: 1060068
Old Code: 1175

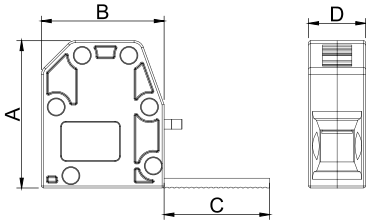

Dimension (mm)	New Code	Code	A	B	C	D
	1060056	1162	30	25	18	11,5
	1060065	1175	30	25	23	11,5

MATERIAL			
Body	PA6.6	Temp.	-40 ºC, +140 ºC
Bridge	Copper	Cable Strip L.	18 mm
Contact	CK45 Steel	Torque	2,0 Nm
Screw	Steel		

DATA	TSE / CE
Voltage	750 V
Current	76 A
Section	16 mm²
Norm	EN-60947-7-1

COLOURS

	35 - 50 mm²		70 - 90 - 120 mm²		
COLOUR	New Code	Old Code	New Code	Old Code	Pcs.
GREY	1060056	1162	1060065	1172	100
CREAM	1060057	1163	1060066	1173	100
BLACK	1060058	1164	1060067	1174	100
BLUE	1060059	1165	1060068	1175	100
BROWN	1060060	1166	1060069	1176	100
RED	1060061	1167	1060070	1177	100
YELLOW	1060062	1168	1060071	1178	100
GREEN	1060063	1169	1060072	1179	100

MARKING

	New Code	Old Code	See Page
Dekafix	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175 -177


MRK SERIES DOUBLE LEVEL SCREW CONNECTION RAIL TERMINAL BLOCKS




MRK-C 2,5

New Code: 1010332

Old Code: 1612



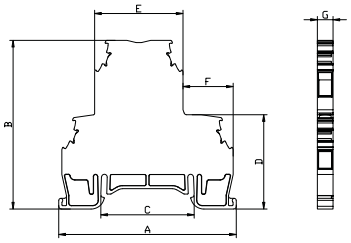

Dimension (mm)	A	B	C	D	E	F	G
	66,3	63	34,5	35,2	33	18,75	5,8

MATERIAL			
Body	PA6.6	**Temp.**	-40 ºC, +140 ºC
Bridge	Copper	**Cable Strip L.**	9 mm
Contact	CK45 Steel	**Torque**	0,4 Nm
Screw	Steel		

DATA	TSE / CE	UL
Voltage	750 V	600 V
Current	24 A	24A
Section	2,5 mm^2	12 AWG
Norm	EN-60947-7-1	UL 1059

COLOURS

	V2	V2	V0	V0	
COLOUR	**New Code**	**Old Code**	**New Code**	**Old Code**	**Pcs.**
GREY	**1010332**	1612	**1010411**	0732	**50**
CREAM	**1010333**	1613			**50**
BLACK	**1010334**	1614			**50**
BLUE	**1010335**	1615			**50**
BROWN	**1010336**	1616			**50**
RED	**1010337**	1617			**50**
YELLOW	**1010338**	1618			**50**
GREEN	**1010339**	1619			**50**

ACCESSORIES

	New Code	Old Code	Section	Pcs.	See Page
Cross Connection	**1060106**	1925	**2,5 / 2**	**100**	**Pg. 37**
	1060107	1926	**2,5 / 3**	**100**	**Pg. 37**
	1060108	1927	**2,5 / 4**	**75**	**Pg. 37**
	1060109	1928	**2,5 / 10**	**30**	**Pg. 37**
	1060110	1929	**2,5 / 20**	**20**	**Pg. 37**
Stopper	**1060002**	1202		**100**	**Pg. 35**
	1060005	1212		**100**	**Pg. 34**
	1060014	1222		**100**	**Pg. 35**
Group Sticker	**1060024**	1232		**100**	**Pg. 34**

MARKING


	New Code	Old Code	See Page
Dekafix	**1060192**	4440	**Pg. 173**
	1060194	4442	**Pg. 173**
	-	9540	**Pg. 179**
	-	9770	**Pg. 175, 176**
Roll Label	-	8943-S11	**Pg. 169**




MRK-C 4

New Code: 1010368

Old Code: 1652



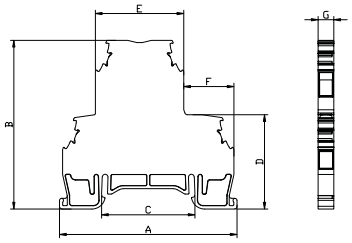

Dimension (mm)	A	B	C	D	E	F	G
	66,3	63	34,5	35,2	33	18,75	6,6

MATERIAL			
Body	PA6.6	**Temp.**	-40 ºC, +140 ºC
Bridge	Copper	**Cable Strip L.**	9 mm
Contact	CK45 Steel	**Torque**	0,5 Nm
Screw	Steel		

DATA	TSE / CE	UL
Voltage	750 V	600 V
Current	32 A	32
Section	4 mm^2	10 AWG
Norm	EN-60947-7-1	UL 1059

COLOURS

	V2	V2	V0	V0	
COLOUR	**New Code**	**Old Code**	**New Code**	**Old Code**	**Pcs.**
GREY	**1010368**	1652	**1010410**	0722	**50**
CREAM	**1010369**	1653			**50**
BLACK	**1010370**	1654			**50**
BLUE	**1010371**	1655			**50**
BROWN	**1010372**	1656			**50**
RED	**1010373**	1657			**50**
YELLOW	**1010374**	1658			**50**
GREEN	**1010375**	1659			**50**

ACCESSORIES

	New Code	Old Code	Section	Pcs.	See Page
Cross Connection	**1060111**	1930	**4 / 2**	**100**	**Pg. 37**
	1060112	1931	**4 / 3**	**100**	**Pg. 37**
	1060113	1932	**4 / 4**	**50**	**Pg. 37**
	1060114	1933	**4 / 10**	**30**	**Pg. 37**
	1060115	1934	**4 / 20**	**20**	**Pg. 37**
Stopper	**1060002**	1202		**100**	**Pg. 35**
	1060005	1212		**100**	**Pg. 34**
	1060014	1222		**100**	**Pg. 35**
Group Sticker	**1060024**	1232		**100**	**Pg. 34**

MARKING


	New Code	Old Code	See Page
Dekafix	**1060196**	4390	**Pg. 173**
	1060194	4442	**Pg. 173**
	-	9540	**Pg. 179**
	-	9770	**Pg. 175 - 177**
Roll Label	-	8943-S11	**Pg. 169**


MRK SERIES DOUBLE LEVEL SCREW CONNECTION BRIDGED RAIL TERMINAL BLOCKS



MRK-C 2,5

New Code: 1010341
Old Code: 1622
Bridged



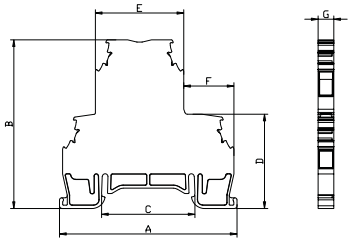

Dimension (mm)	A	B	C	D	E	F	G
	66,3	63	34,5	35,2	33	18,75	5,8

MATERIAL			
Body	PA6.6	Temp.	-40 ºC, +140 ºC
Bridge	Copper	Cable Strip L.	9 mm
Contact	CK45 Steel	Torque	0,4 Nm
Screw	Steel		

DATA	TSE / CE	UL
Voltage	750 V	600 V
Current	24 A	24 A
Section	2,5 mm²	12 AWG
Norm	EN-60947-7-1	UL 1059

COLOURS

	V2	V2	V0	V0	
COLOUR	New Code	Old Code	New Code	Old Code	Pcs.
GREY	1010341	1622	1010407	0482	50
CREAM	1010342	1623			50
BLACK	1010343	1624			50
BLUE	1010344	1625			50
BROWN	1010345	1626			50
RED	1010346	1627			50
YELLOW	1010347	1628			50
GREEN	1010348	1629			50

ACCESSORIES

	New Code	Old Code	Section	Pcs.	See Page
Cross Connection	1060106	1925	2,5 / 2	100	Pg. 37
	1060107	1926	2,5 / 3	100	Pg. 37
	1060108	1927	2,5 / 4	75	Pg. 37
	1060109	1928	2,5 / 10	30	Pg. 37
	1060110	1929	2,5 / 20	20	Pg. 37
Stopper	1060002	1202		100	Pg. 35
	1060005	1212		100	Pg. 34
	1060014	1222		100	Pg. 35
Group Sticker	1060024	1232		100	Pg. 34


MARKING


	New Code	Old Code	See Page
Dekafix	1060192	4440	Pg. 173
	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175, 176
Roll Label	-	8943-S11	Pg. 169



MRK-C 4

New Code: 1010377
Old Code: 1662
Bridged



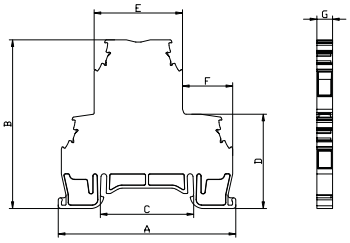

Dimension (mm)	A	B	C	D	E	F	G
	66,3	63	34,5	35,2	33	18,75	6,6

MATERIAL			
Body	PA6.6	Temp.	-40 ºC, +140 ºC
Bridge	Copper	Cable Strip L.	9 mm
Contact	CK45 Steel	Torque	0,5 Nm
Screw	Steel		

DATA	TSE / CE	UL
Voltage	750 V	600 V
Current	32 A	32 A
Section	4 mm²	10 AWG
Norm	EN-60947-7-1	UL 1059

COLOURS

	V2	V2	V0	V0	
COLOUR	New Code	Old Code	New Code	Old Code	Pcs.
GREY	1010377	1662	1010408	0492	50
CREAM	1010378	1663			50
BLACK	1010379	1664			50
BLUE	1010380	1665			50
BROWN	1010381	1666			50
RED	1010382	1667			50
YELLOW	1010383	1668			50
GREEN	1010384	1669			50

ACCESSORIES

	New Code	Old Code	Section	Pcs.	See Page
Cross Connection	1060111	1930	4 / 2	100	Pg. 37
	1060112	1931	4 / 3	100	Pg. 37
	1060113	1932	4 / 4	50	Pg. 37
	1060114	1933	4 / 10	30	Pg. 37
	1060115	1934	4 / 20	20	Pg. 37
Stopper	1060002	1202		100	Pg. 35
	1060005	1212		100	Pg. 34
	1060014	1222		100	Pg. 35
Group Sticker	1060024	1232		100	Pg. 34

MARKING

	New Code	Old Code	See Page
Dekafix	1060190	4390	Pg. 173
	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175 -177
Roll Label	-	8943-S11	Pg. 169

MRK SERIES DOUBLE LEVEL SCREW CONNECTION RAIL TERMINAL BLOCKS (WITH DIODE)




MRK-C 2,5


New Code: 1010350

Old Code: 1632

Diode



Please Specify The Diode Direction!



Dimension (mm)	A	B	C	D	E	F	G
	66,3	63	34,5	35,2	33	18,75	5,8

MATERIAL			
Body	PA6.6	Temp.	-40 ºC, +140 ºC
Bridge	Copper	Cable Strip L.	9 mm
Contact	CK45 Steel	Torque	0,4 Nm
Screw	Steel		

DATA	TSE / CE	UL
Voltage	750 V	600 V
Current	1A	1A
Section	2,5 mm²	12 AWG
Norm	EN-60947-7-1	UL 1059

COLOURS

	V2	V2	V0	V0	
COLOUR	New Code	Old Code	New Code	Old Code	Pcs.
GREY	1010350	1632	1010406	0402	50
CREAM	1010351	1633			50
BLACK	1010352	1634			50
BLUE	1010353	1635			50
BROWN	1010354	1636			50
RED	1010355	1637			50
YELLOW	1010356	1638			50
GREEN	1010357	1639			50

ACCESSORIES

	New Code	Old Code	Section	Pcs.	See Page
Cross Connection	1060106	1925	2,5 / 2	100	Pg. 37
	1060107	1926	2,5 / 3	100	Pg. 37
	1060108	1927	2,5 / 4	75	Pg. 37
	1060109	1928	2,5 / 10	30	Pg. 37
	1060110	1929	2,5 / 20	20	Pg. 37
Stopper	1060002	1202		100	Pg. 35
	1060005	1212		100	Pg. 34
	1060014	1222		100	Pg. 35
Group Sticker	1060024	1232		100	Pg. 34

MARKING

	New Code	Old Code	See Page
Dekafix	1060192	4440	Pg. 173
	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175, 176
Roll Label	-	8943-S11	Pg. 169




MRK-C 4


New Code: 1010386

Old Code: 1672

Diode



Please Specify The Diode Direction!



Dimension (mm)	A	B	C	D	E	F	G
	66,3	63	34,5	35,2	33	18,75	6,6

MATERIAL			
Body	PA6.6	Temp.	-40 ºC, +140 ºC
Bridge	Copper	Cable Strip L.	9 mm
Contact	CK45 Steel	Torque	0,5 Nm
Screw	Steel		

DATA	TSE / CE	UL
Voltage	750 V	600 V
Current	1A	1A
Section	4 mm²	10 AWG
Norm	EN-60947-7-1	UL 1059

COLOURS

	V2	V2	V0	V0	
COLOUR	New Code	Old Code	New Code	Old Code	Pcs.
GREY	1010386	1672	1010405	0392	50
CREAM	1010387	1673			50
BLACK	1010388	1674			50
BLUE	1010389	1675			50
BROWN	1010390	1676			50
RED	1010391	1677			50
YELLOW	1010392	1678			50
GREEN	1010393	1679			50

ACCESSORIES

	New Code	Old Code	Section	Pcs.	See Page
Cross Connection	1060111	1930	4 / 2	100	Pg. 37
	1060112	1931	4 / 3	100	Pg. 37
	1060113	1932	4 / 4	50	Pg. 37
	1060114	1933	4 / 10	30	Pg. 37
	1060115	1934	4 / 20	20	Pg. 37
Stopper	1060002	1202		100	Pg. 35
	1060005	1212		100	Pg. 34
	1060014	1222		100	Pg. 35
Group Sticker	1060024	1232		100	Pg. 34


MARKING


	New Code	Old Code	See Page
Dekafix	1060190	4390	Pg. 173
	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175 - 177
Roll Label	-	8943-S11	Pg. 169

MRK SERIES TRIPLE LEVEL SCREW CONNECTION RAIL TERMINAL BLOCKS




MRK-3K 2,5
Code: 1010425



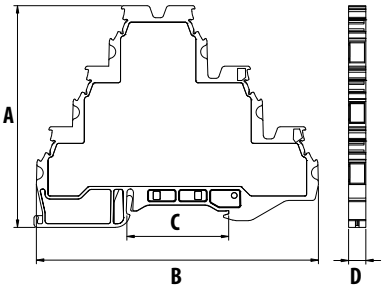

MRK-3K 2,5
Code: 1010434
Bridged



Dimension (mm)	A	B	C	D
	75	94,5	34,5	5,85

MATERIAL			
Body	PA6.6	Temp.	-40 ºC, +140 ºC
Bridge	Copper	Cable Strip L.	9 mm
Contact	CK45 Steel	Torque	0,4 Nm
Screw	Steel		

DATA	TSE / CE
Voltage	750 V
Current	24 A
Section	2,5 mm²
Norm	EN-60947-7-1

	COLOURS		BRIDGED COLOURS		
	V2	V0	V2	V0	Pcs.
COLOUR	Code	Code	Code	Code	
GREY	1010425	1010479	1010434	1010488	50
CREAM	1010426	1010480	1010435	1010489	50
BLACK	1010427	1010481	1010436	1010490	50
BLUE	1010428	1010482	1010437	1010491	50
BROWN	1010429	1010483	1010438	1010492	50
RED	1010430	1010484	1010439	1010493	50
YELLOW	1010431	1010485	1010440	1010494	50
GREEN	1010432	1010486	1010441	1010495	50

ACCESSORIES


	Code	Section	Pcs.	See Page
Cross Connection	1060206	2,5 / 2	100	Pg. 37
	1060207	2,5 / 3	100	Pg. 37
	1060208	2,5 / 4	75	Pg. 37
	1060209	2,5 / 10	30	Pg. 37
	1060210	2,5 / 20	20	Pg. 37
Stopper	1060002		100	Pg. 35
	1060005		100	Pg. 34
	1060014		100	Pg. 35
Group Sticker	1060024		100	Pg. 34


MARKING

	New Code	Old Code	See Page
Dekafix	1060192	4440	Pg. 173
	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175, 176
Roll Label	-	8943-S11	Pg. 169




MRK-3K 2,5
Code: 1010443
Level 2 + 3 Bridged



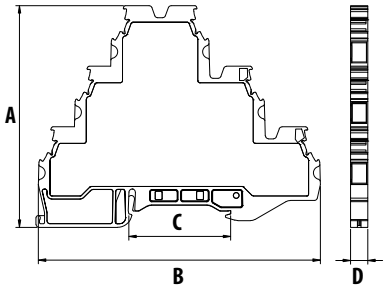

MRK-3K 2,5
Code: 1010452
Level 1 + 2 Bridged



Dimension (mm)	A	B	C	D
	75	94,5	34,5	5,85

MATERIAL			
Body	PA6.6	Temp.	-40 ºC, +140 ºC
Bridge	Copper	Cable Strip L.	9 mm
Contact	CK45 Steel	Torque	0,4 Nm
Screw	Steel		

DATA	TSE / CE
Voltage	750 V
Current	24 A
Section	2,5 mm²
Norm	EN-60947-7-1

	LEVEL 2+3 BRIDGED COLOURS		LEVEL 1+2 BRIDGED COLOURS		
	V2	V0	V2	V0	Pcs.
COLOUR	Code	Code	Code	Code	
GREY	1010443	1010497	1010452	1010506	50
CREAM	1010444	1010498	1010453	1010507	50
BLACK	1010445	1010499	1010454	1010508	50
BLUE	1010446	1010500	1010455	1010509	50
BROWN	1010447	1010501	1010456	1010510	50
RED	1010448	1010502	1010457	1010511	50
YELLOW	1010449	1010503	1010458	1010512	50
GREEN	1010450	1010504	1010459	1010513	50

ACCESSORIES

	Code	Section	Pcs.	See Page
Cross Connection	1060206	2,5 / 2	100	Pg. 37
	1060207	2,5 / 3	100	Pg. 37
	1060208	2,5 / 4	75	Pg. 37
	1060209	2,5 / 10	30	Pg. 37
	1060210	2,5 / 20	20	Pg. 37
Stopper	1060002		100	Pg. 35
	1060005		100	Pg. 34
	1060014		100	Pg. 35
Group Sticker	1060024		100	Pg. 34


MARKING

	New Code	Old Code	See Page
Dekafix	1060192	4440	Pg. 173
	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175, 176
Roll Label	-	8943-S11	Pg. 169


MRK SERIES TRIPLE LEVEL SCREW CONNECTION RAIL TERMINAL BLOCKS




MRK-3K 2,5
Code: 1010461
Level 2 + 3 Diode



Please Specify The Diode Direction!

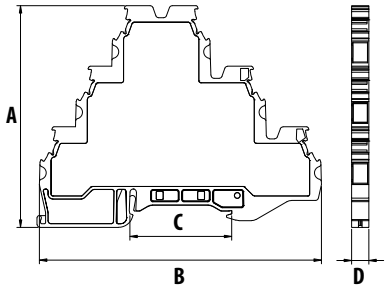

MRK-3K 2,5
Code: 1010470
Level 1 + 2 Diode



Please Specify The Diode Direction!

Dimension (mm)	A	B	C	D
	75	94,5	34,5	5,85


MATERIAL			
Body	PA6.6	Temp.	-40 ºC, +140 ºC
Bridge	Copper	Cable Strip L.	9 mm
Contact	CK45 Steel	Torque	0,4 Nm
Screw	Steel		

DATA	TSE / CE
Voltage	750 V
Current	1A
Section	2,5 mm²
Norm	EN-60947-7-1


2+3 DIODE COLOURS			1+2 DIODE COLOURS		
	V2	V0	V2	V0	Pcs.
COLOUR	Code	Code	Code	Code	
GREY	1010461	1010515	1010470	1010524	50
CREAM	1010462	1010516	1010471	1010525	50
BLACK	1010463	1010517	1010472	1010526	50
BLUE	1010464	1010518	1010473	1010527	50
BROWN	1010465	1010519	1010474	1010528	50
RED	1010466	1010520	1010475	1010529	50
YELLOW	1010467	1010521	1010476	1010530	50
GREEN	1010468	1010522	1010477	1010531	50

ACCESSORIES				
Cross Connection	Code	Section	Pcs.	See Page
	1060206	2,5 / 2	100	Pg. 37
	1060207	2,5 / 3	100	Pg. 37
	1060208	2,5 / 4	75	Pg. 37
	1060209	2,5 / 10	30	Pg. 37
	1060210	2,5 / 20	20	Pg. 37
Stopper	1060002		100	Pg. 35
	1060005		100	Pg. 34
	1060014		100	Pg. 35
Group Sticker	1060024		100	Pg. 34


MARKING			
	New Code	Old Code	See Page
Dekafix	1060192	4440	Pg. 173
	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175, 176
Roll Label	-	8943-S11	Pg. 169



MRK-3K 2,5
Code: 1010418
Level 2 + 3 Diode - Earth



Please Specify The Diode Direction!

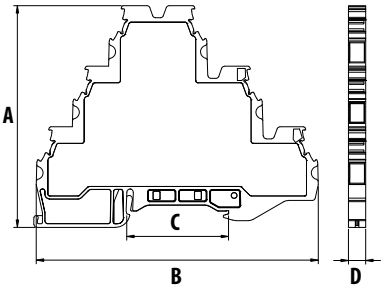

Dimension (mm)	A	B	C	D
	75	94,5	34,5	5,85

MATERIAL			
Body	PA6.6	Temp.	-40 ºC, +140 ºC
Bridge	Copper	Cable Strip L.	9 mm
Contact	CK45 Steel	Torque	0,4 Nm
Screw	Steel		
The Foot Which Contact to the Rail	Brass		

DATA	TSE / CE
Voltage	750 V
Current	1A
Section	2,5 mm²
Norm	EN-60947-7-1

COLOURS			
	V2	V0	
COLOUR	Code	Code	Pcs.
GREY	1010418	1010423	50


ACCESSORIES				
Cross Connection	Code	Section	Pcs.	See Page
	1060206	2,5 / 2	100	Pg. 37
	1060207	2,5 / 3	100	Pg. 37
	1060208	2,5 / 4	75	Pg. 37
	1060209	2,5 / 10	30	Pg. 37
	1060210	2,5 / 20	20	Pg. 37
Stopper	1060002		100	Pg. 35
	1060005		100	Pg. 34
	1060014		100	Pg. 35
Group Sticker	1060024		100	Pg. 34


MARKING			
	New Code	Old Code	See Page
Dekafix	1060192	4440	Pg. 173
	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175, 176
Roll Label	-	8943-S11	Pg. 169

MRK SERIES TRIPLE LEVEL SCREW CONNECTION RAIL TERMINAL BLOCKS




MRK-3K 2,5
Code: 1010414
Earth



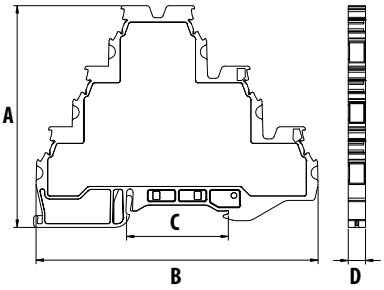

MRK-3K 2,5
Code: 1010415
Bridged - Earth



Dimension (mm)	A	B	C	D
	75	94,5	34,5	5,85


MATERIAL			
Body	PA6.6	Temp.	-40 ºC, +140 ºC
Bridge	Copper	Cable Strip L.	9 mm
Contact	CK45 Steel	Torque	0,4 Nm
Screw	Steel		
The Foot Which Contact to the Rail	Brass		

DATA	TSE / CE
Voltage	750 V
Current	24 A
Section	2,5 mm²
Norm	EN-60947-7-1


EARTH COLOURS			BRIDGED - EARHT COLOURS		
	V2	V0	V2	V0	Pcs.
COLOUR	Code	Code	Code	Code	
GREY	1010414	1010419	1010415	1010420	50


ACCESSORIES				
Cross Connection	Code	Section	Pcs.	See Page
	1060206	2,5 / 2	100	Pg. 37
	1060207	2,5 / 3	100	Pg. 37
	1060208	2,5 / 4	75	Pg. 37
	1060209	2,5 / 10	30	Pg. 37
	1060210	2,5 / 20	20	Pg. 37
Stopper	1060002		100	Pg. 35
	1060005		100	Pg. 34
	1060014		100	Pg. 35
Group Sticker	1060024		100	Pg. 34

MARKING			
	New Code	Old Code	See Page
Dekafix	1060192	4440	Pg. 173
	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175, 176
Roll Label	-	8943-S11	Pg. 169




MRK-3K 2,5
Code: 1010416
Level 2 + 3 Bridged - Earth



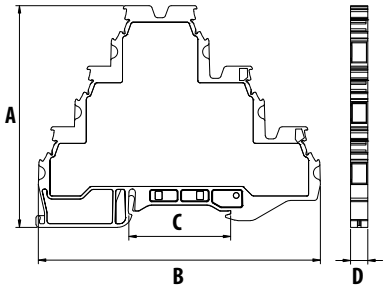

MRK-3K 2,5
Code: 1010417
Level 1 + 2 Bridged - Earth



Dimension (mm)	A	B	C	D
	75	94,5	34,5	5,85

MATERIAL			
Body	PA6.6	Temp.	-40 ºC, +140 ºC
Bridge	Copper	Cable Strip L.	9 mm
Contact	CK45 Steel	Torque	0,4 Nm
Screw	Steel		
The Foot Which Contact to the Rail	Brass		

DATA	TSE / CE
Voltage	750 V
Current	24 A
Section	2,5 mm²
Norm	EN-60947-7-1

LEVEL 2+3 BRID. - EARTH COLOURS			LEVEL 1+2 BRID. - EARHT COLOURS		
	V2	V0	V2	V0	Pcs.
COLOUR	Code	Code	Code	Code	
GREY	1010416	1010421	1010417	1010422	50

ACCESSORIES				
Cross Connection	Code	Section	Pcs.	See Page
	1060206	2,5 / 2	100	Pg. 37
	1060207	2,5 / 3	100	Pg. 37
	1060208	2,5 / 4	75	Pg. 37
	1060209	2,5 / 10	30	Pg. 37
	1060210	2,5 / 20	20	Pg. 37
Stopper	1060002		100	Pg. 35
	1060005		100	Pg. 34
	1060014		100	Pg. 35
Group Sticker	1060024		100	Pg. 34


MARKING			
	New Code	Old Code	See Page
Dekafix	1060192	4440	Pg. 173
	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175, 176
Roll Label	-	8943-S11	Pg. 169


MRK SERIES SCREW CONNECTION MOTOR RAIL TERMINAL BLOCKS



MRK-MT 2,5

Code: 1010412
3 Levels + Earth



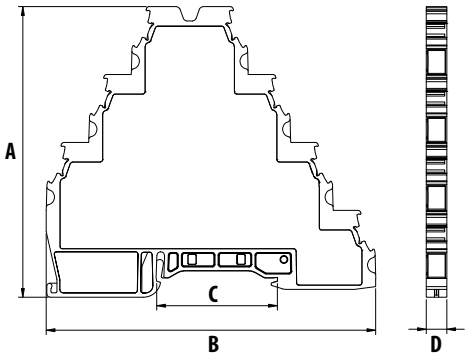

Dimension (mm)	A	B	C	D
	93	94,1	34,5	5,85


MATERIAL			
Body	PA6.6	Temp.	-40 ºC, +140 ºC
Bridge	Copper	Cable Strip L.	9 mm
Contact	CK45 Steel	Torque	0,4 Nm
Screw	Steel		
The Foot Which Contact to the Rail	Brass		

DATA	TSE / CE
Voltage	750 V
Current	24 A
Section	2,5 mm²
Norm	EN-60947-7-1

COLOURS			
	V2	V0	
COLOUR	Code	Code	Pcs.
GREY	1010412	1010413	50

ACCESSORIES				
Cross Connection	Code	Section	Pcs.	See Page
	1060206	2,5 / 2	100	Pg. 37
	1060207	2,5 / 3	100	Pg. 37
	1060208	2,5 / 4	75	Pg. 37
	1060209	2,5 / 10	30	Pg. 37
	1060210	2,5 / 20	20	Pg. 37
Stopper	1060002		100	Pg. 35
	1060005		100	Pg. 34
	1060014		100	Pg. 35
Group Sticker	1060024		100	Pg. 34

MARKING			
	New Code	Old Code	See Page
Dekafix	1060192	4440	Pg. 173
	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175, 176
Roll Label	-	8943-S11	Pg. 169

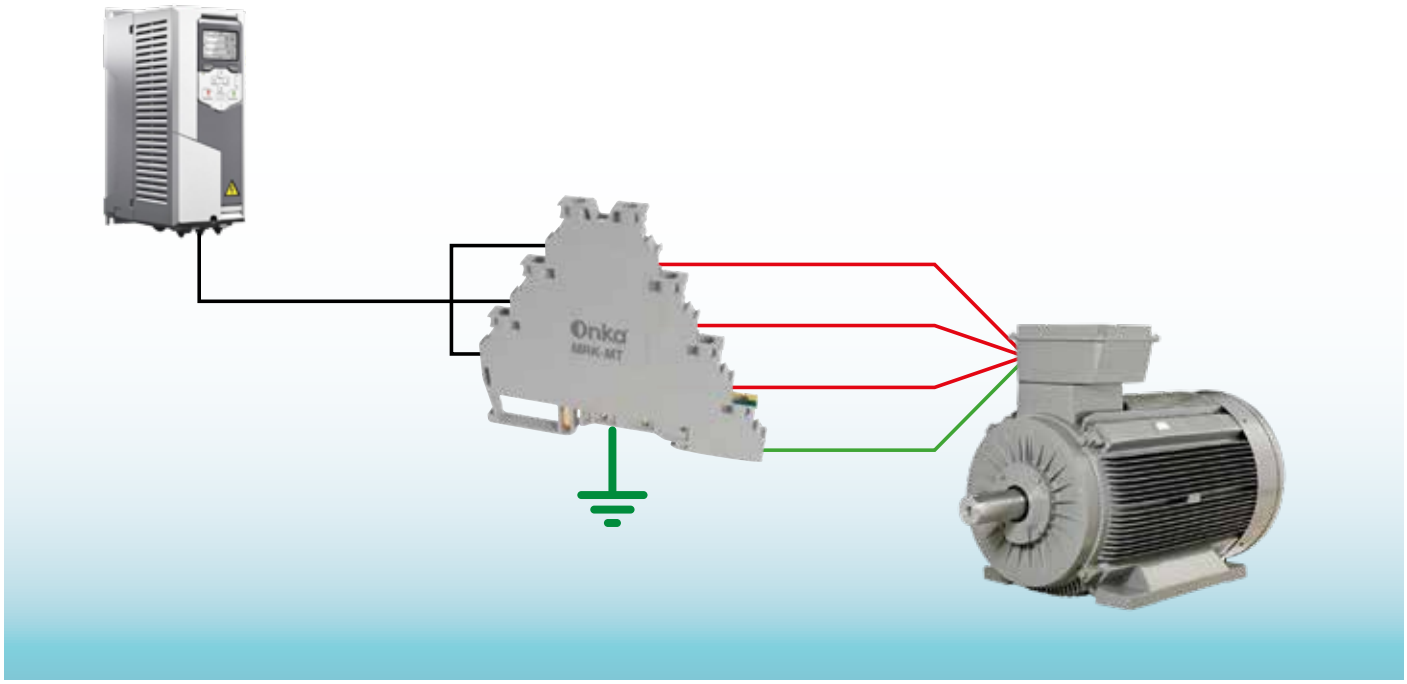


MRK SERIES SCREW CONNECTION FUSED RAIL TERMINAL BLOCKS



MRK-S 6
New Code 1010241
Old Code 1322



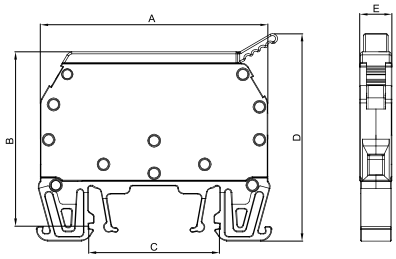

Dimension (mm)	A	B	C	D	E
	60	47	34,5	54,6	8,8

MATERIAL			
Body	PA6.6	Temp.	-40 ºC, +140 ºC
Bridge	Copper	Cable Strip L.	10 mm
Contact	CK45 Steel	Torque	0,8 Nm
Screw	Steel		

DATA	TSE / CE	UL
Voltage	750 V	600 V
Current	6,3 A	6,3 A
Section	6 mm²	8 AWG
Norm	EN-60947-7-3	UL 1059

COLOURS			
COLOUR	New Code	Old Code	Pcs.
GREY	1010241	1322	100

ACCESSORIES				
Types	New Code	Old Code	Pcs.	See Page
With Busbar	1010250	1332	100	-
12 V AC/DC Led	1010259	1342	100	-
24 V AC/DC Led	1010268	1352	100	-
48 V AC/DC Led	1010286	1372	100	-
110 V AC/DC Led	1010304	1392	100	-
220 V AC/DC Led	1010313	1402	100	-
Stopper	1060002	1202	100	Pg. 35
	1060005	1212	100	Pg. 34
	1060014	1222	100	Pg. 35
Group Sticker	1060024	1232	100	Pg. 34
Glass Fuse	WE-FS-52	-	100	-
	5x20 mm Glass Fuse (0.2.....10A Please inform amp.)			


MARKING			
	New Code	Old Code	See Page
Dekafix	1060188	2630	Pg. 173
	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175 -177

MRK SERIES SCREW CONNECTION KNIFE DISCONNECT TERMINAL BLOCK



MRK TEST - 6
New Code 1010238
Old Code 1316





Dimension (mm)	A	B	C	D
	52,8	46,5	34,5	8,5

MATERIAL			
Body	PA6.6	Temp.	-40 ºC, +140 ºC
Bridge	Copper	Cable Strip L.	12 mm
Contact	CK45 Steel	Torque	0,8 Nm
Screw	Brass		

DATA	TSE / CE	UL
Voltage	750 V	600 V
Current	41 A	41 A
Section	6 mm²	8 AWG
Norm	EN-60947-7-1	UL 1059

COLOURS			
COLOUR	New Code	Old Code	Pcs.
GREY	1010238	1316	100

ACCESSORIES			
	New Code	Old Code	See Page
Stopper	1060002	1202	Pg. 35
	1060005	1212	Pg. 34
	1060014	1222	Pg. 35
Group Sticker	1060024	1232	Pg. 34


MARKING			
	New Code	Old Code	See Page
Dekafix	1060188	2630	Pg. 173
	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175 -177


MRK NEW SERIES TEST DISCONNECT TERMINAL BLOCKS



MRK TEST - 6

Without Test Socket
New Code: 1010217
Old Code: 1285



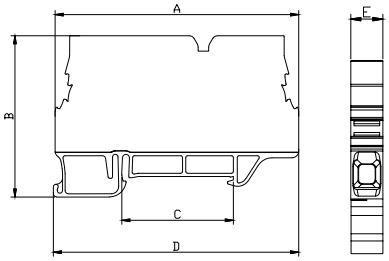

Dimension (mm)	A	B	C	D	E
	75,5	50	34,5	76	8,1

MATERIAL			
Body	PA6.6	Temp.	-40 ºC, +140 ºC
Bridge	Copper	Cable Strip L.	12 mm
Contact	CK45 Steel	Torque	0,8 Nm
Screw	Steel		

DATA	TSE / CE
Voltage	750 V
Current	41 A
Section	6 mm²
Norm	EN-60947-7-1

COLOURS

COLOUR	New Code	Old Code	Pcs.
GREY	1010217	1285	50
CREAM	1010211	1278	50

ACCESSORIES

Cross Connection	New Code	Old Code	Section	Pcs.	See Page
	1060116	1935	6 / 2	100	Pg. 37
	1060117	1936	6 / 3	50	Pg. 37
	1060118	1937	6 / 4	50	Pg. 37
	1060119	1938	6 / 10	15	Pg. 37
	1060120	1939	6 / 20	10	Pg. 37
Stopper	1060002	1202		100	Pg. 35
	1060005	1212		100	Pg. 34
	1060014	1222		100	Pg. 35
Group Sticker	1060024	1232		100	Pg. 34


MARKING


	New Code	Old Code	See Page
Dekafix	1060188	2630	Pg. 173
	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175 -177
Roll Label	-	8943-S11	Pg. 169



MRK TEST - 6

Single Test Socket
New Code: 1010213
Old Code: 1281





Dimension (mm)	A	B	C	D	E
	75,5	66,3	34,5	76	8,1

MATERIAL			
Body	PA6.6	Temp.	-40 ºC, +140 ºC
Bridge	Copper	Cable Strip L.	12 mm
Contact	CK45 Steel	Torque	0,8 Nm
Screw	Steel		

DATA	TSE / CE
Voltage	750 V
Current	41 A
Section	6 mm²
Norm	EN-60947-7-1

COLOURS

COLOUR	New Code	Old Code	Pcs.
GREY	1010213	1281	50


ACCESSORIES

Cross Connection	New Code	Old Code	Section	Pcs.	See Page
	1060116	1935	6 / 2	100	Pg. 37
	1060117	1936	6 / 3	50	Pg. 37
	1060118	1937	6 / 4	50	Pg. 37
	1060119	1938	6 / 10	15	Pg. 37
	1060120	1939	6 / 20	10	Pg. 37
	1060147	1790	6 / 2	10	Pg. 28
	1060148	1971	6 / 3	10	Pg. 28
	1060149	1972	6 / 4	10	Pg. 28
	1060150	1973	6 / 6	10	Pg. 28
	1060151	1974	6 / 10	10	Pg. 28
Stopper	1060002	1202		100	Pg. 35
	1060005	1212		100	Pg. 34
	1060014	1222		100	Pg. 35
Group Sticker	1060024	1232		100	Pg. 34


MARKING


	New Code	Old Code	See Page
Dekafix	1060188	2630	Pg. 173
	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175 -177
Roll Label	-	8943-S11	Pg. 169

MRK NEW SERIES TEST DISCONNECT TERMINAL BLOCKS



MRK TEST - 6
Double Test Socket
New Code: 1010215
Old Code: 1283



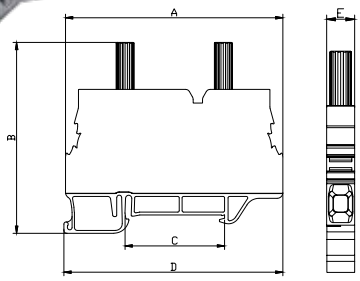

Dimension (mm)	A	B	C	D	E
	75,5	66,3	34,5	76	8,1

MATERIAL			
Body	PA6.6	Temp.	-40 ºC, +140 ºC
Bridge	Copper	Cable Strip L.	12 mm
Contact	CK45 Steel	Torque	0,8 Nm
Screw	Steel		


DATA	TSE / CE
Voltage	750 V
Current	41 A
Section	6 mm²
Norm	EN-60947-7-1

COLOURS			
COLOUR	New Code	Old Code	Pcs.
GREY	1010215	1283	50
CREAM	1010212	1279	50


ACCESSORIES					
Cross Connection	New Code	Old Code	Section	Pcs.	See Page
	1060116	1935	6 / 2	100	Pg. 37
	1060117	1936	6 / 3	50	Pg. 37
	1060118	1937	6 / 4	50	Pg. 37
	1060119	1938	6 / 10	15	Pg. 37
	1060120	1939	6 / 20	10	Pg. 37
	1060147	1790	6 / 2	10	Pg. 28
	1060148	1971	6 / 3	10	Pg. 28
	1060149	1972	6 / 4	10	Pg. 28
	1060150	1973	6 / 6	10	Pg. 28
	1060151	1974	6 / 10	10	Pg. 28
Stopper	1060002	1202		100	Pg. 35
	1060005	1212		100	Pg. 34
	1060014	1222		100	Pg. 35
Group Sticker	1060024	1232		100	Pg. 34

MARKING			
	New Code	Old Code	See Page
Dekafix	1060188	2630	Pg. 173
	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175 -177
Roll Label	-	8943-S11	Pg. 169

MRK 6 TEST DISCONNECT TERMINAL BLOCK ACCESSORIES

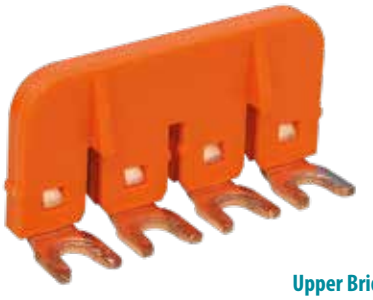


Upper Bridge for Test Sockets

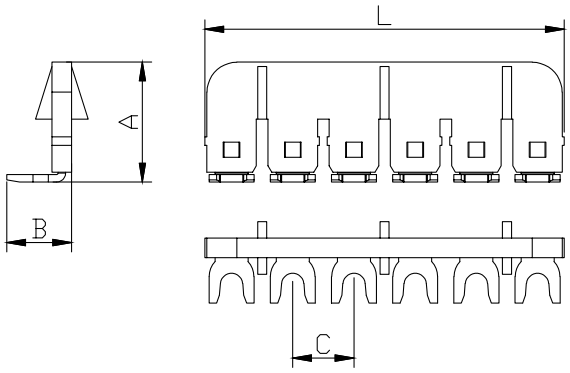

NEW CODE	OLD CODE	TYPE	Dimensions (mm)				
			A	B	C	L	Pcs
1060147	1970	2 Poles	16	8,6	8,1	15,2	10
1060148	1971	3 Poles	16	8,6	8,1	23,4	10
1060149	1972	4 Poles	16	8,6	8,1	31,5	10
1060150	1973	6 Poles	16	8,6	8,1	47,8	10
1060151	1974	10 Poles	16	8,6	8,1	80,4	10

MATERIAL	
Body	PA6.6
Bridge	Copper
Temp.	-40 ºC, +140 ºC

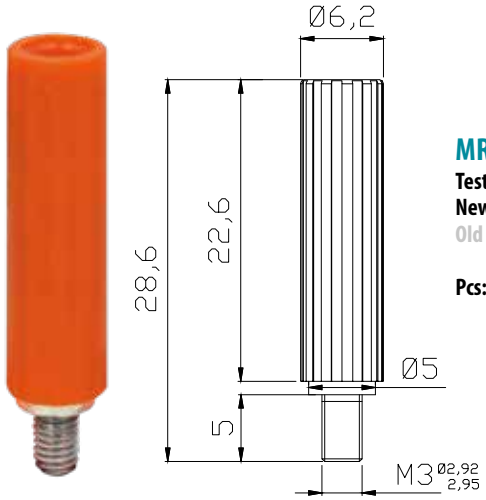


MRK TEST - 6
Test Socket
New Code: 1060073
Old Code: 1280


Pcs: 10


MATERIAL	
Body	PA6.6
Bridge	Brass
Temp.	-40 ºC, +140 ºC

MRK SERIES TEST DISCONNECT TERMINAL BLOCKS

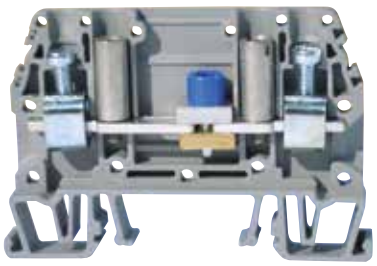

MRK TEST - 10
Without Test Socket
New Code: 1010236
Old Code: 1312



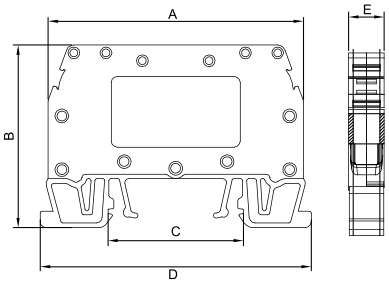

Dimension (mm)	A	B	C	D	E
	65	46,5	34,5	69	9,1

MATERIAL			
Body	PA6.6	Temp.	-40 ºC, +140 ºC
Bridge	Copper	Cable Strip L.	12 mm
Contact	CK45 Steel	Torque	0,8 Nm
Screw	Steel		

DATA	TSE / CE	UL
Voltage	750 V	600 V
Current	57 A	50 A
Section	10 mm²	8 AWG
Norm	EN-60947-7-1	UL 1059

COLOURS			
COLOUR	New Code	Old Code	Pcs.
GREY	1010236	1312	75


ACCESSORIES	New Code	Old Code	Pcs.	See Page
Upper Bridge 2 Poles	1060078	1303	50	Pg. 31
Upper Bridge 4 Poles	1060080	1318	50	Pg. 31
Upper Bridge 8 Poles	1060077	1302	50	Pg. 31
Testing Screw	1060081	1319	50	Pg. 31
Stopper	1060002	1202	100	Pg. 35
	1060005	1212	100	Pg. 34
	1060014	1222	100	Pg. 35
Group Sticker	1060024	1232	100	Pg. 34


MARKING			
Dekafix	New Code	Old Code	See Page
	1060188	2630	Pg. 173
	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175 -177

MRK SERIES TEST DISCONNECT TERMINAL BLOCKS



MRK TEST - 10
Single Test Socket
New Code: 1010230
Old Code: 1306



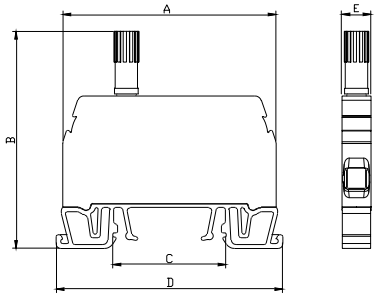

Dimension (mm)	A	B	C	D	E
	65	66,1	34,5	69	9

MATERIAL			
Body	PA6.6	Temp.	-40 ºC, +140 ºC
Bridge	Copper	Cable Strip L.	12 mm
Contact	CK45 Steel	Torque	0,8 Nm
Screw	Steel		

DATA	TSE / CE	UL
Voltage	750 V	600 V
Current	57 A	50 A
Section	10 mm²	8 AWG
Norm	EN-60947-7-1	UL 1059

COLOURS			
COLOUR	New Code	Old Code	Pcs.
GREY	1010230	1306	50


ACCESSORIES	New Code	Old Code	Pcs.	See Page
Upper Bridge 2 Poles	1060078	1303	50	Pg. 31
Upper Bridge 4 Poles	1060080	1318	50	Pg. 31
Upper Bridge 8 Poles	1060077	1302	50	Pg. 31
Testing Screw	1060081	1319	50	Pg. 31
Stopper	1060002	1202	100	Pg. 35
	1060005	1212	100	Pg. 34
	1060014	1222	100	Pg. 35
Group Sticker	1060024	1232	100	Pg. 34


MARKING			
Dekafix	New Code	Old Code	See Page
	1060188	2630	Pg. 173
	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175 -177

MRK SERIES TEST DISCONNECT TERMINAL BLOCKS



MRK TEST - 10
Double Test Socket
New Code: 1010232
Old Code: 1308



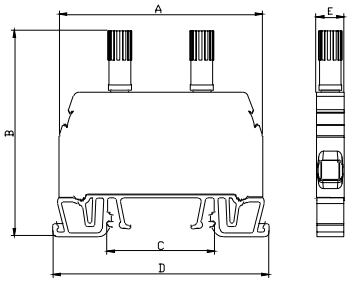

Dimension (mm)	A	B	C	D	E
	65	66,1	34,5	69	9

MATERIAL			
Body	PA6.6	Temp.	-40 ºC, +140 ºC
Bridge	Copper	Cable Strip L.	12 mm
Contact	CK45 Steel	Torque	0,8 Nm
Screw	Steel		

DATA	TSE / CE	UL
Voltage	750 V	600 V
Current	57 A	50 A
Section	10 mm²	8 AWG
Norm	EN-60947-7-1	UL 1059

COLOURS			
COLOUR	New Code	Old Code	Pcs.
GREY	1010232	1308	50


ACCESSORIES	New Code	Old Code	Pcs.	See Page
Upper Bridge 2 Poles	1060078	1303	50	Pg. 31
Upper Bridge 4 Poles	1060080	1318	50	Pg. 31
Upper Bridge 8 Poles	1060077	1302	50	Pg. 31
Testing Screw	1060081	1319	50	Pg. 31
Stopper	1060002	1202	100	Pg. 35
	1060005	1212	100	Pg. 34
	1060014	1222	100	Pg. 35
Group Sticker	1060024	1232	100	Pg. 34


MARKING	New Code	Old Code	See Page
Dekafix	1060188	2630	Pg. 173
	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175 -177

MRK SERIES TEST DISCONNECT TERMINAL SET



MRK TEST - 10
4 Poles Test Disconnect Set
New Code: 1010229
Old Code: 1305



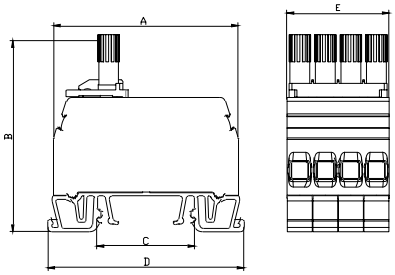

Dimension (mm)	A	B	C	D	E
	65	68,1	34,5	69	36

MATERIAL			
Body	PA6.6	Temp.	-40 ºC, +140 ºC
Bridge	Copper	Cable Strip L.	12 mm
Contact	CK45 Steel	Torque	0,8 Nm
Screw	Steel		

DATA	TSE / CE	UL
Voltage	750 V	600 V
Current	57 A	50 A
Section	10 mm²	8 AWG
Norm	EN-60947-7-1	UL 1059

COLOURS			
COLOUR	New Code	Old Code	Pcs.
GREY	1010229	1305	50


ACCESSORIES	New Code	Old Code	Pcs.	See Page
Double Test	1010232	1308	50	Pg. 31
Upper Bridge 2 Poles	1060078	1303	50	Pg. 31
Upper Bridge 4 Poles	1060080	1318	50	Pg. 31
Upper Bridge 8 Poles	1060077	1302	50	Pg. 31
Testing Screw	1060081	1319	50	Pg. 31
Stopper	1060002	1202	100	Pg. 35
	1060005	1212	100	Pg. 34
	1060014	1222	100	Pg. 35
Group Sticker	1060024	1232	100	Pg. 34

MARKING	New Code	Old Code	See Page
Dekafix	1060188	2630	Pg. 173
	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175 -177


MRK 10 TEST DISCONNECT TERMINAL BLOCKS ACCESSORIES




Upper Bridge for Test Sockets, 2 Poles
New Code: 1060078
Old Code: 1303



Upper Bridge for Test Sockets, 4 Poles
New Code: 1060080
Old Code: 1318

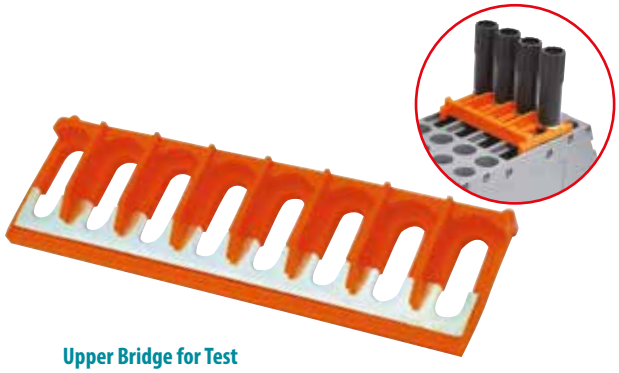


Upper Bridge for Test Sockets, 8 Poles
New Code: 1060077
Old Code: 1302

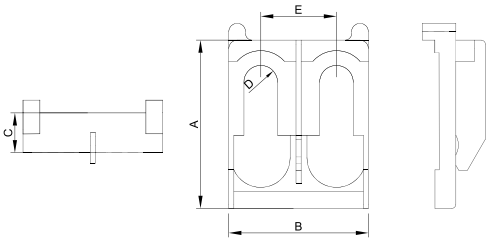


NEW CODE	OLD CODE	Dimensions (mm)				
		A	B	C	D	E
1060078	1303	22	22	4,7	4	9
1060080	1318	22	34,6	4,7	4	9

MATERIAL	
Body	PA6.6
Temp.	-40 ºC, +140 ºC
Metal Leg	Copper

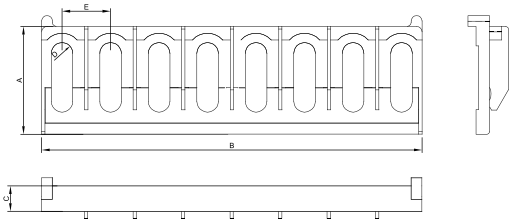

NEW CODE	OLD CODE	Dimensions (mm)				
		A	B	C	D	E
1060077	1302	22	71	4,7	4	9

MATERIAL	
Body	PA6.6
Temp.	-40 ºC, +140 ºC
Metal Leg	Copper

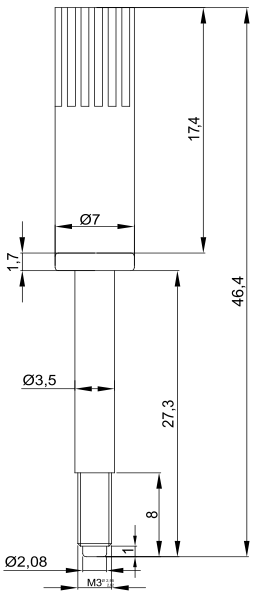




Testing Screw
New Code: 1060081
Old Code: 1319



MATERIAL	
Body	PA6.6
Temp.	-40 ºC, +140 ºC
Screw	Brass

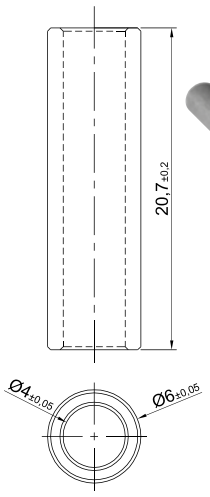



Explusive for Upper Bridge
New Code: 1060079
Old Code: 1304

MATERIAL	
Body	Brass


MRK SERIES SCREW CONNECTION EARTH RAIL TERMINAL BLOCKS




MTK 2,5

New Code: 1010219

Old Code: 1291



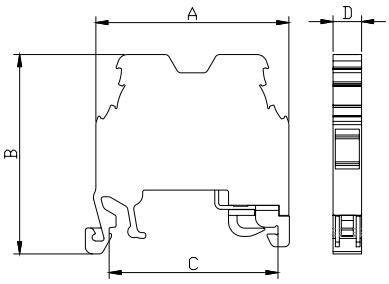

Dimension (mm)	A	B	C	D
	40	41,3	34,5	5,9

MATERIAL			
Body	PA6.6	**Temp.**	-40 ºC, +140 ºC
Bridge	Copper	**Cable Strip L.**	9 mm
Contact	CK45 Steel	**Torque**	0,4 Nm
Screw	Steel		
The Foot Which Contact to the Rail	Brass		

DATA	TSE / CE
Voltage	750 V
Section	2,5 mm²
Norm	EN-60947-7-2

COLOURS			
COLOUR	**New Code**	**Old Code**	**Pcs.**
CAMOUFLAGE	**1010219**	1291	**100**

ACCESSORIES			
	New Code	**Old Code**	**See Page**
Stopper	**1060002**	1202	**Pg. 35**
	1060005	1212	**Pg. 34**
	1060014	1222	**Pg. 35**
Group Sticker	**1060024**	1232	**Pg. 34**


MARKING			
	New Code	**Old Code**	**See Page**
Dekafix	**1060190**	4390	**Pg. 173**
	1060194	4442	**Pg. 173**
	-	9540	**Pg. 179**
	-	9770	**Pg. 175, 176**
Roll Label	-	8943-S11	**Pg. 169**




MTK 4

New Code: 1010220

Old Code: 1293



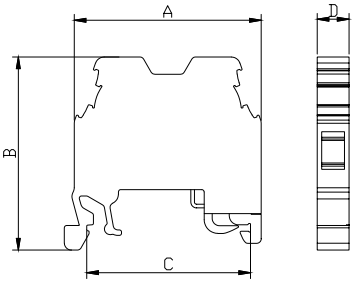

Dimension (mm)	A	B	C	D
	40	41,3	34,5	6,8

MATERIAL			
Body	PA6.6	**Temp.**	-40 ºC, +140 ºC
Bridge	Copper	**Cable Strip L.**	9 mm
Contact	CK45 Steel	**Torque**	0,5 Nm
Screw	Steel		
The Foot Which Contact to the Rail	Brass		


DATA	TSE / CE	UL
Voltage	750 V	300 V
Section	4,0 mm²	10 AWG
Norm	EN-60947-7-2	UL 1059

COLOURS			
COLOUR	**New Code**	**Old Code**	**Pcs.**
CAMOUFLAGE	**1010220**	1293	**100**

ACCESSORIES			
	New Code	**Old Code**	**See Page**
Stopper	**1060002**	1202	**Pg. 35**
	1060005	1212	**Pg. 34**
	1060014	1222	**Pg. 35**
Group Sticker	**1060024**	1232	**Pg. 34**

MARKING			
	New Code	**Old Code**	**See Page**
Dekafix	**1060190**	4390	**Pg. 173**
	1060194	4442	**Pg. 173**
	-	9540	**Pg. 179**
	-	9770	**Pg. 175 - 177**
Roll Label	-	8943-S11	**Pg. 169**


MRK SERIES SCREW CONNECTION EARTH RAIL TERMINAL BLOCKS




MTK 10

New Code: 1010221

Old Code: 1294



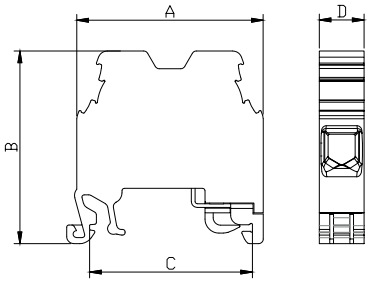

Dimension (mm)	A	B	C	D
	40	41,3	34,5	9,6

MATERIAL			
Body	PA6.6	**Temp.**	-40 ºC, +140 ºC
Bridge	Copper	**Cable Strip L.**	10 mm
Contact	CK45 Steel	**Torque**	0,8 Nm
Screw	Steel		
The Foot Which Contact to the Rail	Brass		

DATA	TSE / CE	UL
Voltage	750 V	600 V
Section	10 mm²	8 AWG
Norm	EN-60947-7-2	UL 1059

COLOURS

COLOUR	New Code	Old Code	Pcs.
CAMOUFLAGE	1010221	1294	100

ACCESSORIES

	New Code	Old Code	See Page
Stopper	1060002	1202	Pg. 35
	1060005	1212	Pg. 34
	1060014	1222	Pg. 35
Group Sticker	1060024	1232	Pg. 34


MARKING


	New Code	Old Code	See Page
Dekafix	1060188	2630	Pg. 173
	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175 - 177
Roll Label	-	8943-S11	Pg. 169



MTK 16

Code: 1010532



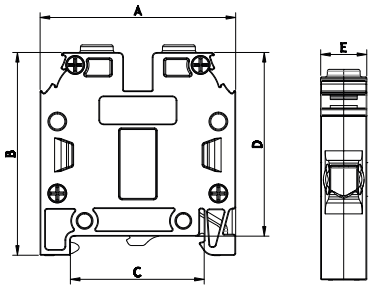

Dimension (mm)	A	B	C	D	E
	51	52,9	34,5	47,9	12

MATERIAL			
Body	PA6.6	**Temp.**	-40 ºC, +140 ºC
Bridge	Copper	**Cable Strip L.**	16 mm
Contact	CK45 Steel	**Torque**	1,2 Nm
Screw	Steel		
The Foot Which Contact to the Rail	Brass		

DATA	TSE / CE	UL
Voltage	750 V	600 V
Section	16 mm²	6 AWG
Norm	EN-60947-7-2	UL 1059

COLOURS

COLOUR	Code	Pcs.
CAMOUFLAGE	1010532	50

ACCESSORIES

	New Code	Old Code	See Page
Stopper	1060002	1202	Pg. 35
	1060005	1212	Pg. 34
	1060014	1222	Pg. 35
Group Sticker	1060024	1232	Pg. 34

MARKING

	New Code	Old Code	See Page
Dekafix	1060192	4440	Pg. 173
	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175 - 177
Roll Label	-	8943-S11	Pg. 169


MRK SERIES SCREW CONNECTION EARTH RAIL TERMINAL BLOCKS



MTK 25

New Code: 1010223


Old Code: 1297







MTK 35 (SHORT)

Code: 1010533



With Non - Insulated Cord End Terminals

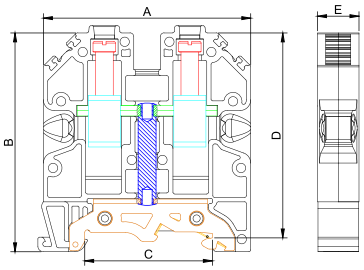

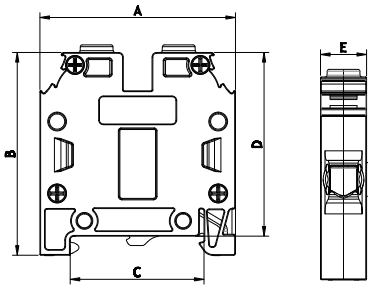

Dimension (mm)	A	B	C	D	E
	58,2	63,5	34,5	57	11,6

MATERIAL			
Body	PA6.6	**Temp.**	-40 ºC, +140 ºC
Bridge	Copper	**Cable Strip L.**	16 mm
Contact	CK45 Steel	**Torque**	1,2 Nm
Screw	Steel		
The Foot Which Contact to the Rail	Brass		

DATA	TSE / CE
Voltage	750 V
Section	25 mm²
Norm	EN-60947-7-2

COLOURS			
COLOUR	**New Code**	**Old Code**	**Pcs.**
CAMOUFLAGE	**1010223**	1297	**50**

ACCESSORIES			
	New Code	**Old Code**	**See Page**
Stopper	**1060002**	1202	**Pg. 35**
	1060005	1212	**Pg. 34**
	1060014	1222	**Pg. 35**
Group Sticker	**1060024**	1232	**Pg. 34**

MARKING			
	New Code	**Old Code**	**See Page**
Dekafix	**1060194**	4442	**Pg. 173**
	-	9540	**Pg. 179**
	-	9770	**Pg. 175 -177**

Dimension (mm)	A	B	C	D	E
	51	52,9	34,5	47,9	15

MATERIAL			
Body	PA6.6	**Temp.**	-40 ºC, +140 ºC
Bridge	Copper	**Cable Strip L.**	16 mm
Contact	CK45 Steel	**Torque**	1,2 Nm
Screw	Steel		
The Foot Which Contact to the Rail	Brass		

DATA	TSE / CE
Voltage	750 V
Section	35 mm²
Norm	EN-60947-7-2

COLOURS		
COLOUR	**Code**	**Pcs.**
CAMOUFLAGE	**1010533**	**50**


ACCESSORIES			
	New Code	**Old Code**	**See Page**
Stopper	**1060002**	1202	**Pg. 35**
	1060005	1212	**Pg. 34**
	1060014	1222	**Pg. 35**
Group Sticker	**1060024**	1232	**Pg. 34**


MARKING			
	New Code	**Old Code**	**See Page**
Dekafix	**1060192**	4440	**Pg. 173**
	1060194	4442	**Pg. 173**
	-	9540	**Pg. 179**
	-	9770	**Pg. 175 - 177**
Roll Label	-	8943-S11	**Pg. 169**

MRK SERIES SCREW CONNECTION EARTH RAIL TERMINAL BLOCKS



MTK 35
New Code: 1010225
Old Code: 1296



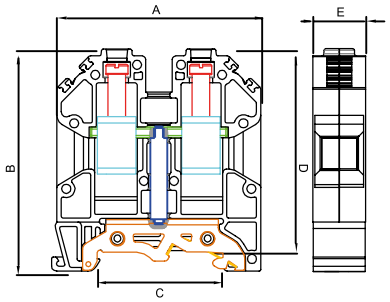

Dimension (mm)	A	B	C	D	E
	58,2	63,5	34,5	57	14,9

MATERIAL			
Body	PA6.6	Temp.	-40 ºC, +140 ºC
Bridge	Copper	Cable Strip L.	16 mm
Contact	CK45 Steel	Torque	1,2 Nm
Screw	Steel		
The Foot Which Contact to the Rail	Brass		

DATA	TSE / CE
Voltage	750 V
Section	35 mm²
Norm	EN-60947-7-2

COLOURS			
COLOUR	New Code	Old Code	Pcs.
CAMOUFLAGE	1010225	1296	30


ACCESSORIES			
	New Code	Old Code	See Page
Stopper	1060002	1202	Pg. 34
	1060005	1212	Pg. 35
	1060014	1222	Pg. 35
Group Sticker	1060024	1232	Pg. 34

MARKING			
	New Code	Old Code	See Page
Dekafix	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175 -177

MRK AND OPK SERIES BIG STOPPER



Big Stopper
New Code: 1060005
Old Code: 1212

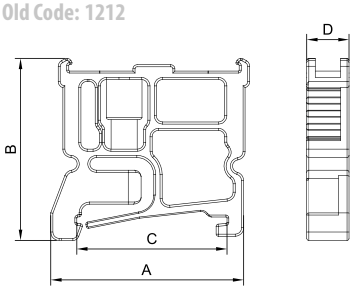

It can be marked by **"ONKA-8920-736SE/SB"** sticker.

Dimension (mm)	A	B	C	D
	44,6	43,5	34,5	9,8


MATERIAL			
Body	PA	Temp.	-40 ºC, +140 ºC
Screw	Steel	Pcs	100

MARKING			
	New Code	Old Code	See Page
Dekafix	1060190	4390	Pg. 173
	1060192	4440	Pg. 173
	1060194	4442	Pg. 173
	1060198	5443	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175 -177

MRK AND OPK SERIES BIG STOPPER



Stopper With Group Sticker
New Code: 1060024
Old Code: 1232



It can be marked by **"ONKA-8920-736SE/SB"** sticker.

Dimension (mm)	A	B	C	D
	44,6	43,5	34,5	9,8


MATERIAL			
Body	PA	Temp.	-40 ºC, +140 ºC
Screw	Steel	Pcs	100

MARKING			
	New Code	Old Code	See Page
Dekafix	1060190	4390	Pg. 173
	1060192	4440	Pg. 173
	1060194	4442	Pg. 173
	1060198	5443	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175 -177

MRK AND OPK SERIES SCREWLESS STOPPER



Screwless Stopper
New Code: 1060002
Old Code: 1202

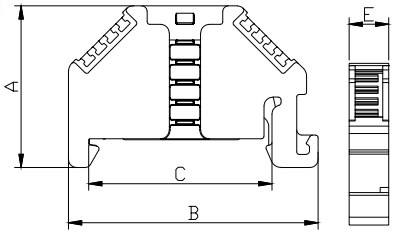

Dimension (mm)	A	B	C	D
	30,7	47,4	34,5	7,5


MATERIAL			
Body	PA	Temp.	-40 ºC, +140 ºC
Screw	Stainless Steel	Pcs	100

MARKING	New Code	Old Code	See Page
Dekafix	1060188	2630	Pg. 173
	1060190	4390	Pg. 173
	1060192	4440	Pg. 173
	1060194	4442	Pg. 173
	1060198	5443	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175 -177

MRK AND OPK SERIES MINI STOPPER



Mini Stopper
New Code: 1060014
Old Code: 1222

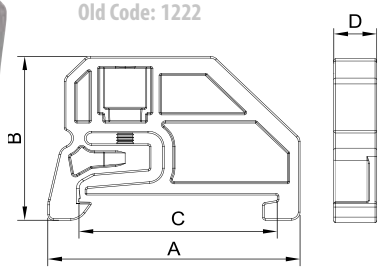

Dimension (mm)	A	B	C	D
	43,0	30,0	34,5	7,5


MATERIAL			
Body	PA	Temp.	-40 ºC, +140 ºC
Screw	Steel	Pcs	100

MARKING	New Code	Old Code	See Page
Dekafix	1060190	4390	Pg. 173
	1060192	4440	Pg. 173
	1060194	4442	Pg. 173
	1060198	5443	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175 -177

MRK SERIES SEPARATION PLATE



MRK Series Separation Plate
New Code: 1060051
Old Code: 0582

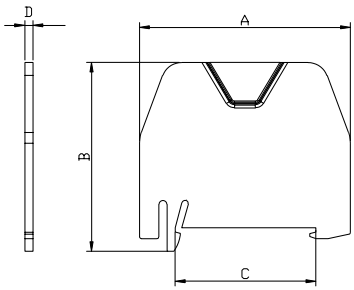


Dimension (mm)	A	B	C	D
	52,0	48,0	34,5	2,0


MATERIAL			
Body	PA	Temp.	-40 ºC, +140 ºC
Pcs	25		

COLOURS	New Code	Old Code	Pcs.
GREY	1060051	0582	25
RED	1060052	0587	25

MRK AND OPK SERIES SEPARATION PLATE




Separation Plate
Code: 0999

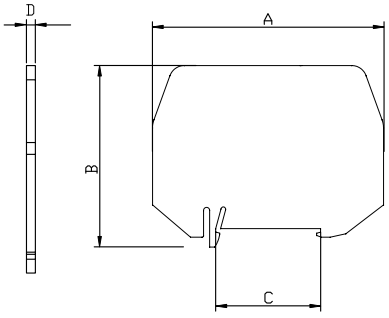

Dimension (mm)	A	B	C	D
	76,0	60,0	34,5	0,7

MATERIAL			
Body	PET (FF)	Temp.	-40 ºC, +140 ºC
Pcs	25		

PROTECTION COVER

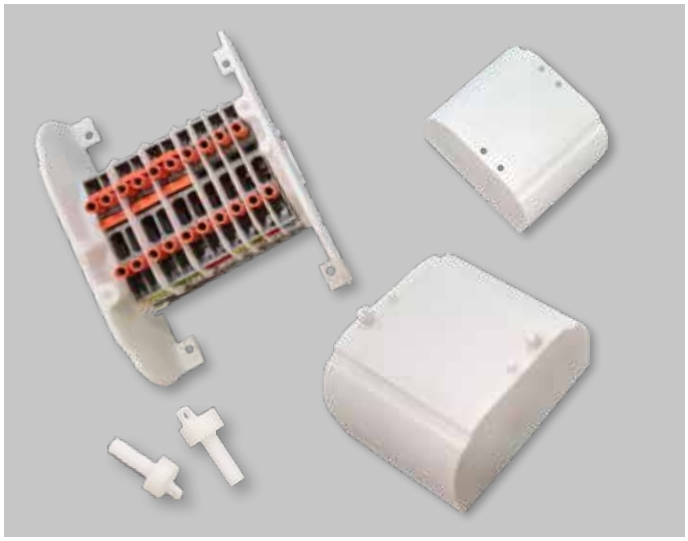


CODE	DESCRIPTIONS
ONKA-1845	Cover Profile (Transparent) mt.
ONKA-1846	Cover Profile (Colored) mt.
ONKA-1847	Side Support Component
ONKA-1848	Resealing Apparatus

GROUP MARKER




Group Marker
New Code: 1060093
Old Code: 1482

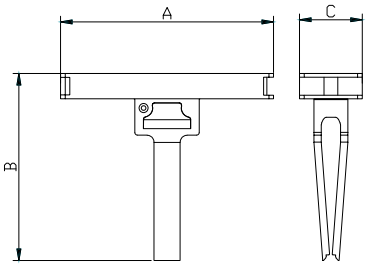


Dimension (mm)	A	B	C
	46,2	40,6	13,6

MATERIAL			
Body	PC	Temp.	-40 ºC, +140 ºC
Pcs	100		

GROUP STICKER



Group Sticker
Code: 1060500

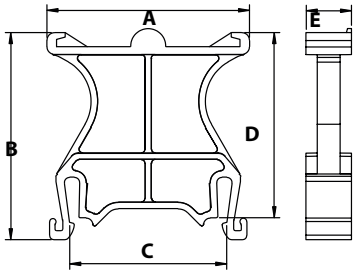

It can be marked by **"ONKA-8920-736SE/SB"** sticker.

Dimension (mm)	A	B	C	D	E
	44,5	45,5	34,5	40,7	10


MATERIAL			
Body	PA 6.6	Pcs	100
Temp.	-40 ºC, +140 ºC		

MRK SERIES CROSS CONNECTIONS

MATERIAL	
Isolation	PA 6.6
Body	Brass
Covering	Tin


Note: All 1,5 mm², 2,5 mm² and 4 mm² cross connections can be both used for MRK and OPK Series.

For the Slim Series, please check the relevant product accessories section.






COLOUR	NEW CODE	OLD CODE	TYPE	PCS
Orange	**1060101**	ONKA-1920	1.5 mm² x 2	100
Orange	**1060102**	ONKA-1921	1.5 mm² x 3	100
Orange	**1060103**	ONKA-1922	1.5 mm² x 4	100
Orange	**1060104**	ONKA-1923	1.5 mm² x 10	30
Orange	**1060105**	ONKA-1924	1.5 mm² x 20	20
Orange	**1060106**	ONKA-1925	2.5 mm² x 2	100
Orange	**1060107**	ONKA-1926	2.5 mm² x 3	100
Orange	**1060108**	ONKA-1927	2.5 mm² x 4	75
Orange	**1060109**	ONKA-1928	2.5 mm² x 10	30
Orange	**1060110**	ONKA-1929	2.5 mm² x 20	20
Orange	**1060111**	ONKA-1930	4 mm² x 2	100
Orange	**1060112**	ONKA-1931	4 mm² x 3	50
Orange	**1060113**	ONKA-1932	4 mm² x 4	50
Orange	**1060114**	ONKA-1933	4 mm² x 10	30
Orange	**1060115**	ONKA-1934	4 mm² x 20	20
Orange	**1060116**	ONKA-1935	6 mm² x 2	100
Orange	**1060117**	ONKA-1936	6 mm² x 3	50
Orange	**1060118**	ONKA-1937	6 mm² x 4	50
Orange	**1060119**	ONKA-1938	6 mm² x 10	15
Orange	**1060120**	ONKA-1939	6 mm² x 20	10
Orange	**1060121**	ONKA-1940	10 mm² x 2	100
Orange	**1060122**	ONKA-1941	10 mm² x 3	50
Orange	**1060123**	ONKA-1942	10 mm² x 4	50
Orange	**1060124**	ONKA-1943	10 mm² x 10	15
Orange	**1060125**	ONKA-1944	10 mm² x 20	10



Monolithic insulated body provides high durability to the conductor busbar

Due to the channels on the comb bridge, it gives the chance to be cut from the center of the pin gap. This feature is valid with 10 and 20 pin bridges






It can be easily disassembled with a screwdriver, by the help of the notch over the bridge


A secure connection with the bridle part

Continuous and safe contact from four points due to the diagonal structure of the pins



MRK SERIES METAL CROSS CONNECTIONS



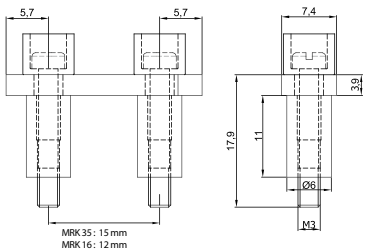


MATERIAL	
Isolation	PA6.6
Body	Brass
Covering	Copper
Screw	Steel

NEW CODE	OLD CODE	TYPE	PCS
1060152	ONKA-2257	16 mm² x 2	10
1060153	ONKA-2258	16 mm² x 3	10
1060154	ONKA-2259	16 mm² x 4	10
1060155	ONKA-2260	16 mm² x 5	10
1060156	ONKA-2261	16 mm² x 6	10
1060157	ONKA-2262	16 mm² x 7	10
1060158	ONKA-2263	16 mm² x 8	10
1060159	ONKA-2264	16 mm² x 9	10
1060160	ONKA-2265	16 mm² x 10	10
1060161	ONKA-2266	35 mm² x 2	10
1060162	ONKA-2267	35 mm² x 3	10
1060163	ONKA-2268	35 mm² x 4	10
1060164	ONKA-2269	35 mm² x 5	10
1060165	ONKA-2270	35 mm² x 6	10
1060166	ONKA-2271	35 mm² x 7	10
1060167	ONKA-2272	35 mm² x 8	10
1060168	ONKA-2273	35 mm² x 9	10
1060169	ONKA-2274	35 mm² x 10	10

MRK SERIES STUD TERMINAL BLOCKS FOR CABLE LUGS (WITH COVER)



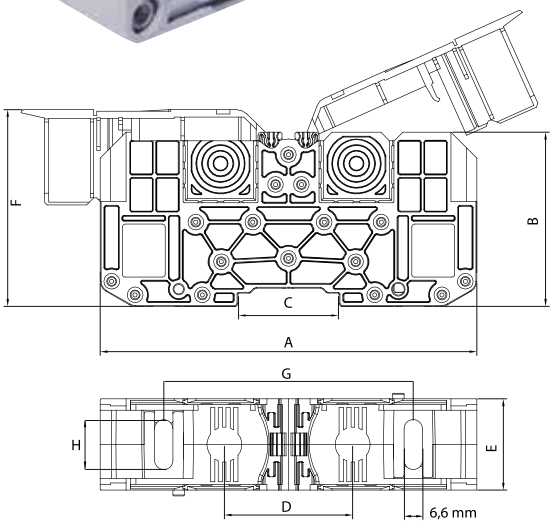









MATERIAL	
Body	PA6.6
Legs	PA6.6
Cover	PA6.6
Bolt	Steel
Nuts	Steel
Bridge	Copper

ACCESSORIES

	New Code	Old Code	See Page
Stopper	**1060002**	1202	**Pg. 34**
	1060005	1212	**Pg. 35**
	1060014	1222	**Pg. 35**
Group Sticker	**1060024**	1232	**Pg. 34**

MARKING

	New Code	Old Code	See Page
Dekafix	**1060192**	4440	**Pg. 173**
	1060194	4442	**Pg. 173**
	-	9540	**Pg. 179**
	-	9770	**Pg. 175 -177**

CODE	DESCRIPTION	QTY / TABLET
ONKA-2473	Ready Warning Signs, Triangle Edg. L 25 mm	132
ONKA-2474	Neutral Signs, Triangle Edg. L 25 mm	132
ONKA-2477	Earth Signs, Triangle Edg. L 25 mm	132
ONKA-2478	Phase Signs, Triangle Edg. L 25 mm	132


* U_{imp} : Impact strength voltage


DESCRIPTIONS

NEW CODE	OLD CODE	SECTION (mm^2)	VOLTAGE	CURRENT	BOLT	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	Box Carton
1030002	ONKA-2302	25	1000 V	101 A	M6	107	50,8	35	40	27	58,5	76,5	16,3	10 / 140
1030017	ONKA-2322	35	1000 V	125 A	M8	107	50,8	35	40	27	58,5	76,5	16,3	10 / 140
1030031	ONKA-2342	50	1000 V	150 A	M8	107	50,8	35	40	27	58,5	76,5	16,3	10 / 140
1030045	ONKA-2362	70	1000 V	192 A	M8	131,5	60,8	35	44,7	31,5	68,5	86,2	17,3	10 / 80
1030059	ONKA-2382	95	1000 V	232 A	M8	131,5	60,8	35	44,7	31,5	68,5	86,2	17,3	10 / 80
1030073	ONKA-2402	120	1000 V	269 A	M10	139,5	70	35	60	41,4	79	94,6	17,3	5 / 30
1030088	ONKA-2422	150	1000 V	309 A	M12	139,5	70	35	60	41,4	79	94,6	17,3	5 / 30
1030102	ONKA-2442	185	1000 V	353 A	M12	163,5	77,5	35	60	55	92	96	26,4	5 / 20
1030116	ONKA-2462	240	1000 V	415 A	M12	163,5	77,5	35	60	55	92	96	26,4	5 / 20







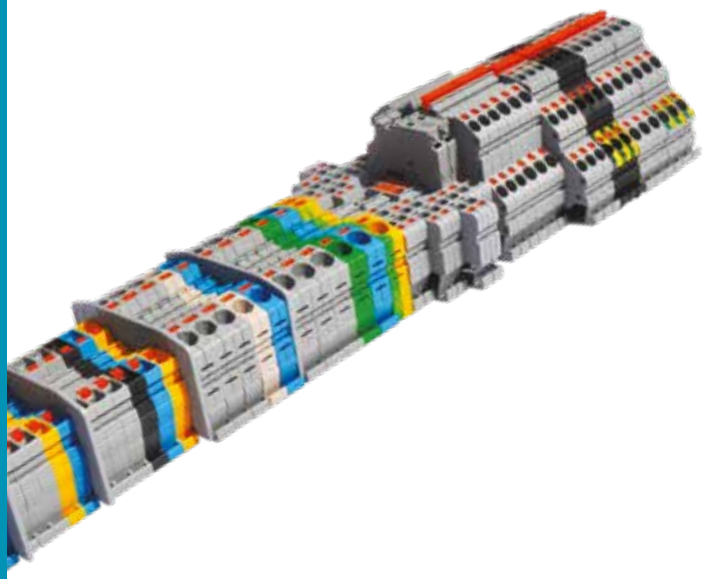

OPK SERIES PUSH-IN CONNECTION RAIL TERMINAL BLOCKS


Technical Features ;

- *Push-in System*
- *Does not require final plate (Both sides are closed), provides cost saving and better isolation*
- *Symmetrical (Mountable to rail on both directions)*
- *Lower cable thrust*
- *Time and cost saving*
- *Reducing transmission, zero contact by means of orange buttons*
- *Springs are stainless steel*
- *Opportuntity to assemble cable with ferrule of 0,50 mm^2 to 35 mm^2 without any hand tool requirement*
- *Labelling system appropriate for strap marking*
- *Double sided bridging opportunity*
- *Isolated comb bridge*

OPK SERIES


Range of Products;


- *OPK Series standard terminal blocks*
- *OPK Series earth rail terminal blocks*
- *OPK Series double rail terminal blocks*
- *OPK Series triple rail terminal blocks*
- *OPK Series 1 in 2 out terminal blocks*
- *OPK Series 2 in 2 out terminal blocks*
- *OPK Series 2 in 2 out knife disconnect terminal blocks*
- *OPK Series fused terminal blocks*
- *MRK and OPK Series stoppers*
- *OPK Series separation plate*
- *OPK Series Cross connections*




• The roll labelling system can be used in all of 2,5 - 4 - 6 and 10 mm² push-in terminal blocks

• It can be tested by touching the test probes from two different points over the terminal blocks without ejecting the fuse






• It can be easily measured within the holes



• OPK fuse terminal block terminals have a nest in order to keep an extra glass fuse

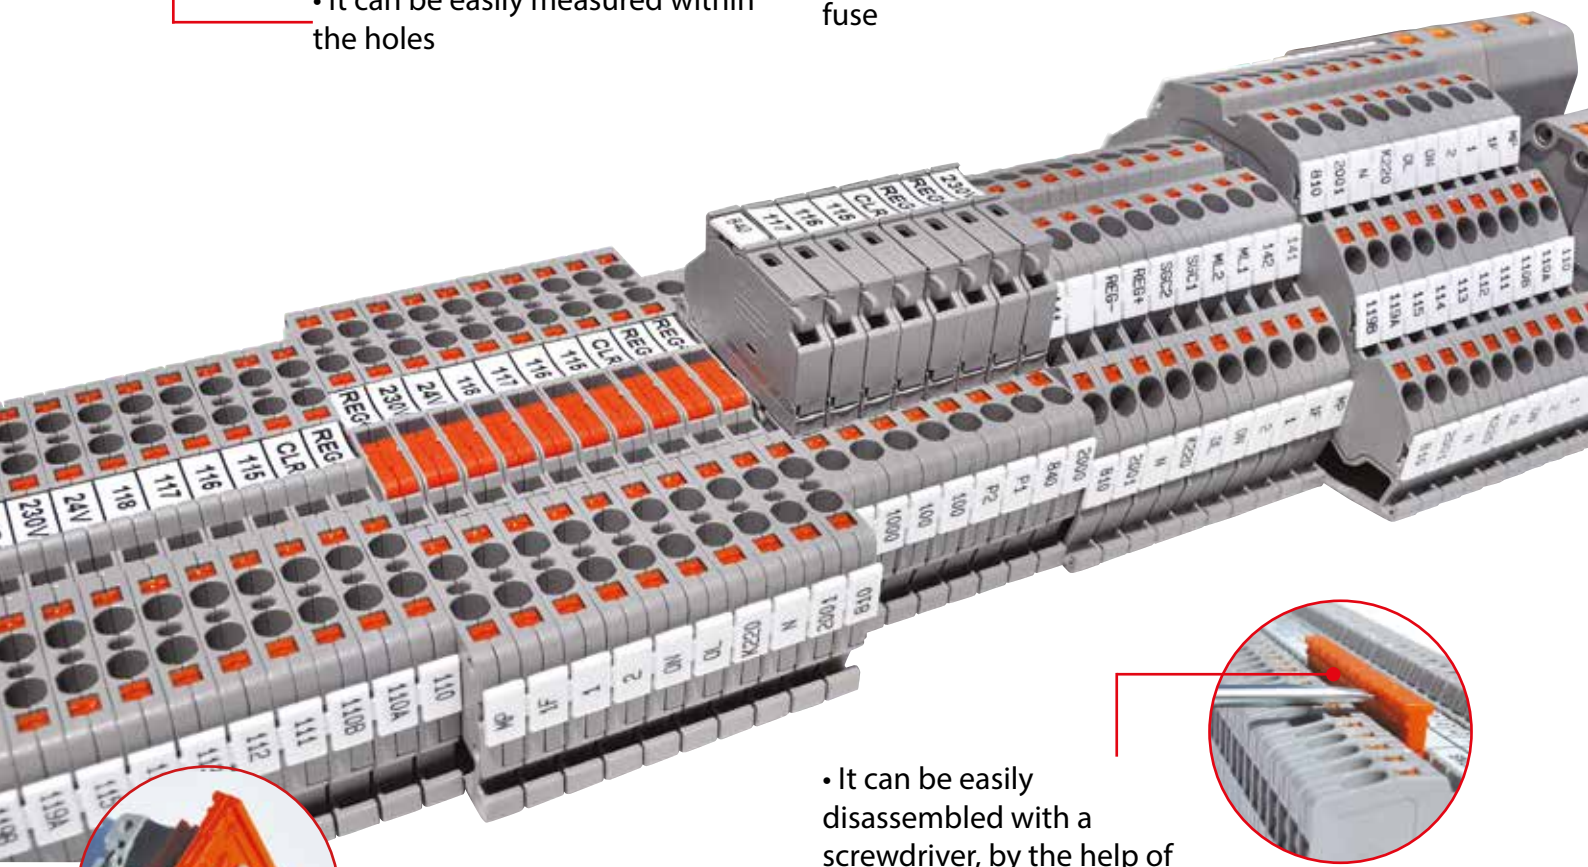
REG
CLR
REG
230V
24V
117
116
115
REG
CLR
REG
230V
24V
118
117
116
115
CLR
REG
REG
230V
24V
117
116
115
CLR
REG
REG
230V
24V
117
116
115
CLR
REG
REG
230V
24V


OPK SERIES PUSH-IN CONNECTION TERMINAL BLOCKS




OPK 1,5

New Code: 1020002

Old Code: 1592



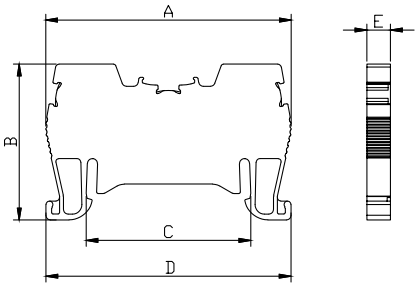

Dimension (mm)	A	B	C	D	E
	52,0	33,0	34,5	51,9	5,0

MATERIAL			
Body	PA6.6	Spring	Stainless Steel
Bridge	Copper	Temp.	-40 ºC, +140 ºC
Orange Button	PA6.6	Cable Strip L.	9 mm

DATA	TSE / CE
Voltage	750 V
Current	17,5 A
Section	1,5 mm²
Norm	EN-60947-7-1

COLOURS

	V2	V2	V0	V0	
COLOUR	New Code	Old Code	New Code	Old Code	Pcs.
GREY	1020002	1592	1020074	0532	100
CREAM	1020003	1593	1020075	0533	100
BLACK	1020004	1594	1020076	0534	100
BLUE	1020005	1595	1020077	0535	100
BROWN	1020006	1596	1020078	0536	100
RED	1020007	1597	1020079	0537	100
YELLOW	1020008	1598	1020080	0538	100
GREEN	1020009	1599	1020081	0539	100

ACCESSORIES

Cross Connection	New Code	Old Code	Section	Pcs.	See Page
	1060101	1920	1,5 / 2	100	Pg. 58
	1060102	1921	1,5 / 3	100	Pg. 58
	1060103	1922	1,5 / 4	100	Pg. 58
	1060104	1923	1,5 / 10	30	Pg. 58
	1060105	1924	1,5 / 20	20	Pg. 58
Stopper	1060002	1202		100	Pg. 56
	1060005	1212		100	Pg. 57
	1060014	1222		100	Pg. 56
Group Sticker	1060024	1232		100	Pg. 57

MARKING


	New Code	Old Code	See Page
Dekafix	1060198	5443	Pg. 173
	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175
Roll Label	-	8943-S11	Pg. 169




OPK 2,5

New Code: 1020013

Old Code: 1502



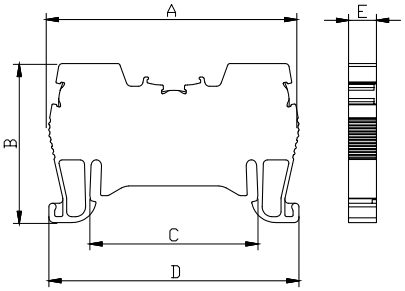

Dimension (mm)	A	B	C	D	E
	52,0	33,0	34,5	51,9	5,8

MATERIAL			
Body	PA6.6	Spring	Stainless Steel
Bridge	Copper	Temp.	-40 ºC, +140 ºC
Orange Button	PA6.6	Cable Strip L.	9 mm

DATA	TSE / CE	UL
Voltage	750 V	600 V
Current	24 A	20 A
Section	2,5 mm²	12 AWG
Norm	EN-60947-7-1	UL 1059

COLOURS

	V2	V2	V0	V0	
COLOUR	New Code	Old Code	New Code	Old Code	Pcs.
GREY	1020013	1502	1020083	0922	100
CREAM	1020014	1503			100
BLACK	1020015	1504	1020084	0924	100
BLUE	1020016	1505	1020085	0925	100
BROWN	1020017	1506	1020086	0926	100
RED	1020018	1507	1020087	0927	100
YELLOW	1020019	1508			100
GREEN	1020020	1509	1020088	0929	100

ACCESSORIES

Cross Connection	New Code	Old Code	Section	Pcs.	See Page
	1060106	1925	2,5 / 2	100	Pg. 58
	1060107	1926	2,5 / 3	100	Pg. 58
	1060108	1927	2,5 / 4	75	Pg. 58
	1060109	1928	2,5 / 10	30	Pg. 58
	1060110	1929	2,5 / 20	20	Pg. 58
Stopper	1060002	1202		100	Pg. 56
	1060005	1212		100	Pg. 57
	1060014	1222		100	Pg. 56
Group Sticker	1060024	1232		100	Pg. 57

MARKING

	New Code	Old Code	See Page
Dekafix	1060192	4440	Pg. 173
	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175, 176
Roll Label	-	8943-S11	Pg. 169

OPK SERIES PUSH-IN CONNECTION TERMINAL BLOCKS




OPK 4

New Code: 1020024

Old Code: 1512



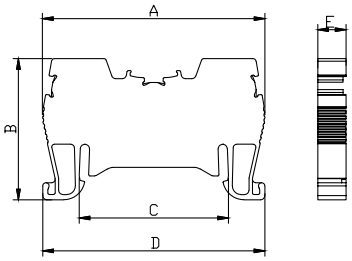

Dimension (mm)	A	B	C	D	E
	52,0	33,0	34,5	51,9	6,6

MATERIAL			
Body	PA6.6	Spring	Stainless Steel
Bridge	Copper	Temp.	-40 ºC, +140 ºC
Orange Button	PA6.6	Cable Strip L.	9 mm

DATA	TSE / CE	UL
Voltage	750 V	600 V
Current	32 A	26 A
Section	4,0 mm²	10 AWG
Norm	EN-60947-7-1	UL 1059

COLOURS

	V2	V2	V0	V0	
COLOUR	New Code	Old Code	New Code	Old Code	Pcs.
GREY	1020024	1512	1020090	0932	100
CREAM	1020025	1513			100
BLACK	1020026	1514	1020091	0934	100
BLUE	1020027	1515	1020092	0935	100
BROWN	1020028	1516	1020093	0936	100
RED	1020029	1517	1020094	0937	100
YELLOW	1020030	1518			100
GREEN	1020031	1519	1020095	0939	100

ACCESSORIES

Cross Connection	New Code	Old Code	Section	Pcs.	See Page
	1060111	1930	4 / 2	100	Pg. 58
	1060112	1931	4 / 3	100	Pg. 58
	1060113	1932	4 / 4	50	Pg. 58
	1060114	1933	4 / 10	30	Pg. 58
	1060115	1934	4 / 20	20	Pg. 58
Stopper	1060002	1202		100	Pg. 56
	1060005	1212		100	Pg. 57
	1060014	1222		100	Pg. 56
Group Sticker	1060024	1232		100	Pg. 57

MARKING


	New Code	Old Code	See Page
Dekafix	1060190	4390	Pg. 173
	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175 - 177
Roll Label	-	8943-S11	Pg. 169




OPK 6

New Code: 1020034

Old Code: 1522



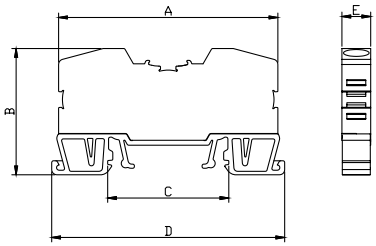

Dimension (mm)	A	B	C	D	E
	62,5	36,0	34,5	66,4	8,2

MATERIAL			
Body	PA6.6	Spring	Stainless Steel
Bridge	Copper	Temp.	-40 ºC, +140 ºC
Orange Button	PA6.6	Cable Strip L.	12 mm

DATA	TSE / CE
Voltage	750 V
Current	41 A
Section	6,0 mm²
Norm	EN-60947-7-1

COLOURS

	V2	V2	V0	V0	
COLOUR	New Code	Old Code	New Code	Old Code	Pcs.
GREY	1020034	1522	1020096	0942	100
CREAM	1020035	1523			100
BLACK	1020036	1524			100
BLUE	1020037	1525			100
BROWN	1020038	1526			100
RED	1020039	1527			100
YELLOW	1020040	1528			100
GREEN	1020041	1529			100

ACCESSORIES

Cross Connection	New Code	Old Code	Section	Pcs.	See Page
	1060127	1945	6 / 2	100	Pg. 58
	1060128	1946	6 / 3	50	Pg. 58
	1060129	1947	6 / 4	50	Pg. 58
	1060130	1948	6 / 10	15	Pg. 58
	1060131	1949	6 / 20	10	Pg. 58
Stopper	1060002	1202		100	Pg. 56
	1060005	1212		100	Pg. 57
	1060014	1222		100	Pg. 56
Group Sticker	1060024	1232		100	Pg. 57

MARKING

	New Code	Old Code	See Page
Dekafix	1060188	2630	Pg. 173
	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175 -177
Roll Label	-	8943-S11	Pg. 169


OPK SERIES PUSH-IN CONNECTION TERMINAL BLOCKS




OPK 10

New Code: 1020044

Old Code: 1532



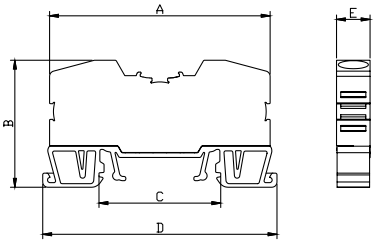





OPK 16

New Code: 1020054

Old Code: 1542





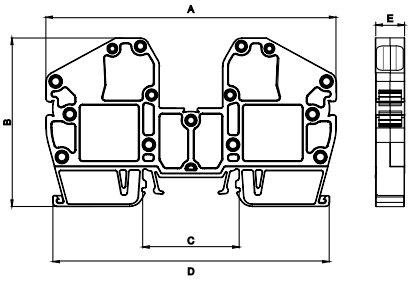

Dimension (mm)	A	B	C	D	E
	62,5	36,0	34,5	66,4	9,5

MATERIAL			
Body	PA6.6	Spring	Stainless Steel
Bridge	Copper	Temp.	-40 ºC, +140 ºC
Orange Button	PA6.6	Cable Strip L.	12 mm

DATA	TSE / CE
Voltage	750 V
Current	57 A
Section	10 mm²
Norm	EN-60947-7-1

COLOURS

	V2	V2	V0	V0	
COLOUR	New Code	Old Code	New Code	Old Code	Pcs.
GREY	1020044	1532	1020097	0952	100
CREAM	1020045	1533			100
BLACK	1020046	1534			100
BLUE	1020047	1535			100
BROWN	1020048	1536			100
RED	1020049	1537			100
YELLOW	1020050	1538			100
GREEN	1020051	1539			100

ACCESSORIES

Cross Connection	New Code	Old Code	Section	Pcs.	See Page
	1060132	1950	10 / 2	100	Pg. 58
	1060133	1951	10 / 3	50	Pg. 58
	1060134	1952	10 / 4	50	Pg. 58
	1060135	1953	10 / 10	15	Pg. 58
	1060136	1954	10 / 20	10	Pg. 58
Stopper	1060002	1202		100	Pg. 56
	1060005	1212		100	Pg. 57
	1060014	1222		100	Pg. 56
Group Sticker	1060024	1232		100	Pg. 57

MARKING

	New Code	Old Code	See Page
Dekafix	1060188	2630	Pg. 173
	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175 -177
Roll Label	-	8943-S11	Pg. 169

Dimension (mm)	A	B	C	D	E
	103,0	60,0	34,5	98,0	10,7

MATERIAL			
Body	PA6.6	Spring	Stainless Steel
Bridge	Copper	Temp.	-40 ºC, +140 ºC
Orange Button	PA6.6	Cable Strip L.	22 mm

DATA	TSE / CE
Voltage	750 V
Current	76 A
Section	16 mm²
Norm	EN-60947-7-1

COLOURS

	V2	V2	V0	V0	
COLOUR	New Code	Old Code	New Code	Old Code	Pcs.
GREY	1020054	1542	1020098	0962	30
CREAM	1020055	1543			30
BLACK	1020056	1544			30
BLUE	1020057	1545			30
BROWN	1020058	1546			30
RED	1020059	1547			30
YELLOW	1020060	1548			30
GREEN	1020061	1549			30

ACCESSORIES

Cross Connection	New Code	Old Code	Section	Pcs.	See Page
	1060136	1955	16 / 2	10	Pg. 58
	1060137	1956	16 / 3	10	Pg. 58
	1060138	1957	16 / 4	10	Pg. 58
	1060139	1958	16 / 10	10	Pg. 58
Stopper	1060002	1202		100	Pg. 56
	1060005	1212		100	Pg. 57
	1060014	1222		100	Pg. 56
Group Sticker	1060024	1232		100	Pg. 57

MARKING

	New Code	Old Code	See Page
Dekafix	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175 -177


OPK SERIES PUSH-IN CONNECTION TERMINAL BLOCKS




OPK 35

New Code: 1020064

Old Code: 1552





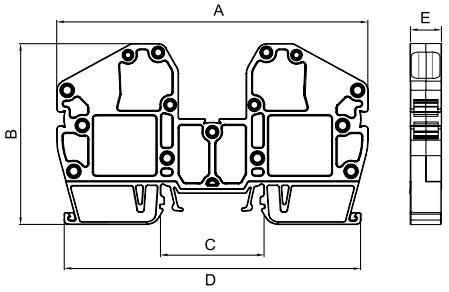

Dimension (mm)	A	B	C	D	E
	103,0	60,0	34,5	98,0	15,2

MATERIAL			
Body	PA6.6	**Spring**	Stainless Steel
Bridge	Copper	**Temp.**	-40 ºC, +140 ºC
Orange Button	PA6.6	**Cable Strip L.**	22 mm

DATA	TSE / CE
Voltage	750 V
Current	125 A
Section	35 mm²
Norm	EN-60947-7-1

COLOURS

	V2	V2	V0	V0	
COLOUR	**New Code**	**Old Code**	**New Code**	**Old Code**	**Pcs.**
GREY	**1020064**	1552	**1020099**	0972	**20**
CREAM	**1020065**	1553			**20**
BLACK	**1020066**	1554			**20**
BLUE	**1020067**	1555			**20**
BROWN	**1020068**	1556			**20**
RED	**1020069**	1557			**20**
YELLOW	**1020070**	1558			**20**
GREEN	**1020071**	1559			**20**

ACCESSORIES

	New Code	Old Code	Section	Pcs.	See Page
Cross Connection 	**1060140**	1959	**35 / 2**	**10**	**Pg. 58**
	1060141	1960	**35 / 3**	**10**	**Pg. 58**
	1060142	1961	**35 / 4**	**10**	**Pg. 58**
	1060143	1962	**35 / 10**	**10**	**Pg. 58**
Stopper	**1060002**	1202		**100**	**Pg. 56**
	1060005	1212		**100**	**Pg. 57**
	1060014	1222		**100**	**Pg. 56**
Group Sticker	**1060024**	1232		**100**	**Pg. 57**

MARKING

	New Code	Old Code	See Page
Dekafix	**1060194**	4442	**Pg. 173**
	-	9540	**Pg. 179**
	-	9770	**Pg. 175 -177**


OPK SERIES PUSH-IN CONNECTION DOUBLE RAIL TERMINAL BLOCKS




OPK - C 2,5

New Code: 1020379

Old Code: 1722



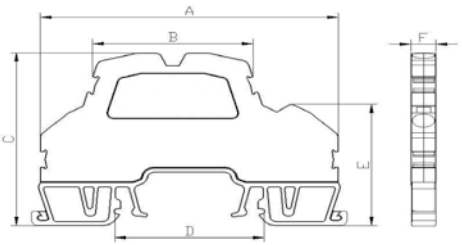

Dimensions (mm)	A	B	C	D	E	F
	69,0	37,0	50,0	34,5	35,5	5,9



MATERIAL			
Body	PA6.6	Spring	Stainless Steel
Bridge	Copper	Temp.	-40 ºC, +140 ºC
Orange Button	PA6.6	Cable Strip L.	9 mm

DATA	TSE / CE	UL
Voltage	750 V	300 V
Current	24 A	16 A
Section	2,5 mm²	12 AWG
Norm	EN-60947-7-1	UL 1059

COLOURS

COLOUR	New Code	Old Code	Pcs.
GREY	1020379	1722	50
CREAM	1020380	1723	50
BLACK	1020381	1724	50
BLUE	1020382	1725	50
BROWN	1020383	1726	50
RED	1020384	1727	50
YELLOW	1020385	1728	50
GREEN	1020386	1729	50

ACCESSORIES

	New Code	Old Code	Section	Pcs.	See Page
Cross Connection 	1060106	1925	2,5 / 2	100	Pg. 58
	1060107	1926	2,5 / 3	100	Pg. 58
	1060108	1927	2,5 / 4	75	Pg. 58
	1060109	1928	2,5 / 10	30	Pg. 58
	1060110	1929	2,5 / 20	20	Pg. 58
Stopper	1060002	1202		100	Pg. 56
	1060005	1212		100	Pg. 57
	1060014	1222		100	Pg. 56
Group Sticker	1060024	1232		100	Pg. 57
Bridged	1020388	1732			
Diode	1020397	1742			

MARKING


	New Code	Old Code	See Page
Dekafix	1060192	4440	Pg. 173
	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175, 176
Roll Label	-	8943-S11	Pg. 169




OPK - C 4

New Code: 1020406

Old Code: 1752



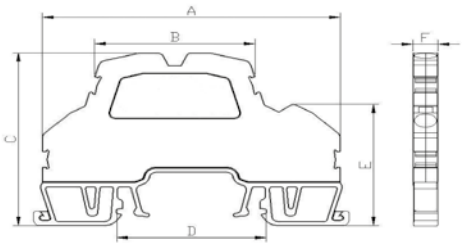

Dimensions (mm)	A	B	C	D	E	F
	69,0	37,0	50,0	34,5	35,5	6,7



MATERIAL			
Body	PA6.6	Spring	Stainless Steel
Bridge	Copper	Temp.	-40 ºC, +140 ºC
Orange Button	PA6.6	Cable Strip L.	9 mm

DATA	TSE / CE	UL
Voltage	750 V	300 V
Current	32 A	22 A
Section	4,0 mm²	10 AWG
Norm	EN-60947-7-1	UL 1059

COLOURS

COLOUR	New Code	Old Code	Pcs.
GREY	1020406	1752	50
CREAM	1020407	1753	50
BLACK	1020408	1754	50
BLUE	1020409	1755	50
BROWN	1020410	1756	50
RED	1020411	1757	50
YELLOW	1020412	1758	50
GREEN	1020413	1759	50

ACCESSORIES

	New Code	Old Code	Section	Pcs.	See Page
Cross Connection 	1060111	1930	4 / 2	100	Pg. 58
	1060112	1931	4 / 3	100	Pg. 58
	1060113	1932	4 / 4	50	Pg. 58
	1060114	1933	4 / 10	30	Pg. 58
	1060115	1934	4 / 20	20	Pg. 58
Stopper	1060002	1202		100	Pg. 56
	1060005	1212		100	Pg. 57
	1060014	1222		100	Pg. 56
Group Sticker	1060024	1232		100	Pg. 57
Bridged	1020415	1762			
Diode	1020424	1772			


MARKING


	New Code	Old Code	See Page
Dekafix	1060190	4390	Pg. 173
	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175 - 177
Roll Label	-	8943-S11	Pg. 169

OPK SERIES PUSH-IN CONNECTION DOUBLE RAIL TERMINAL BLOCKS



OPK - C 2,5
Code: 1020441



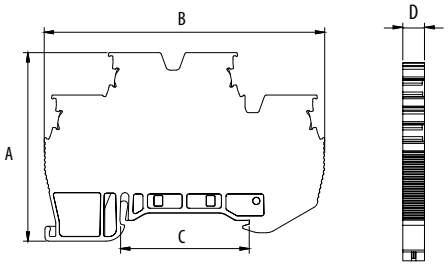

Dimension (mm)	A	B	C	D
	50,5	75,15	34,5	5,8

MATERIAL			
Body	PA6.6	Spring	Stainless Steel
Bridge	Copper	Temp.	-40 ºC, +140 ºC
Orange Button	PA6.6	Cable Strip L.	9 mm

DATA	TSE / CE	UL
Voltage	750 V	600 V
Current	24 A	24 A
Section	2,5 mm²	12 AWG
Norm	EN-60947-7-1	UL 1059

COLOURS

COLOUR	V2 Code	V0 Code	Pcs.
GREY	1020441	1020468	50
CREAM	1020442	1020469	50
BLACK	1020443	1020470	50
BLUE	1020444	1020471	50
BROWN	1020445	1020472	50
RED	1020446	1020473	50
YELLOW	1020447	1020474	50
GREEN	1020448	1020475	50

ACCESSORIES


	New Code	Old Code	Section	Pcs.	See Page
Cross Connection	1060106	1925	2,5 / 2	100	Pg. 58
	1060107	1926	2,5 / 3	100	Pg. 58
	1060108	1927	2,5 / 4	75	Pg. 58
	1060109	1928	2,5 / 10	30	Pg. 58
	1060110	1929	2,5 / 20	20	Pg. 58
Stopper	1060002	1202		100	Pg. 56
	1060005	1212		100	Pg. 57
	1060014	1222		100	Pg. 56
Group Sticker	1060024	1232		100	Pg. 57


MARKING

	New Code	Old Code	See Page
Dekafix	1060192	4440	Pg. 173
	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175, 176
Roll Label	-	8943-S11	Pg. 169



OPK - C 2,5
Code: 1020450
Bridged



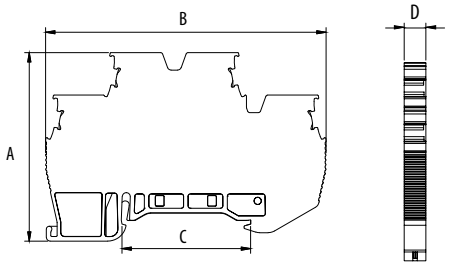

Dimension (mm)	A	B	C	D
	50,5	75,15	34,5	5,8

MATERIAL			
Body	PA6.6	Spring	Stainless Steel
Bridge	Copper	Temp.	-40 ºC, +140 ºC
Orange Button	PA6.6	Cable Strip L.	9 mm

DATA	TSE / CE	UL
Voltage	750 V	600 V
Current	24 A	24 A
Section	2,5 mm²	12 AWG
Norm	EN-60947-7-1	UL 1059

COLOURS

COLOUR	V2 Code	V0 Code	Pcs.
GREY	1020450	1020477	50
CREAM	1020451	1020478	50
BLACK	1020452	1020479	50
BLUE	1020453	1020480	50
BROWN	1020454	1020481	50
RED	1020455	1020482	50
YELLOW	1020456	1020483	50
GREEN	1020457	1020484	50

ACCESSORIES

	New Code	Old Code	Section	Pcs.	See Page
Cross Connection	1060106	1925	2,5 / 2	100	Pg. 58
	1060107	1926	2,5 / 3	100	Pg. 58
	1060108	1927	2,5 / 4	75	Pg. 58
	1060109	1928	2,5 / 10	30	Pg. 58
	1060110	1929	2,5 / 20	20	Pg. 58
Stopper	1060002	1202		100	Pg. 56
	1060005	1212		100	Pg. 57
	1060014	1222		100	Pg. 56
Group Sticker	1060024	1232		100	Pg. 57

MARKING

	New Code	Old Code	See Page
Dekafix	1060192	4440	Pg. 173
	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175, 176
Roll Label	-	8943-S11	Pg. 169


OPK SERIES PUSH-IN CONNECTION DOUBLE RAIL TERMINAL BLOCKS




OPK - C 2,5

Code: 1020459

Diode



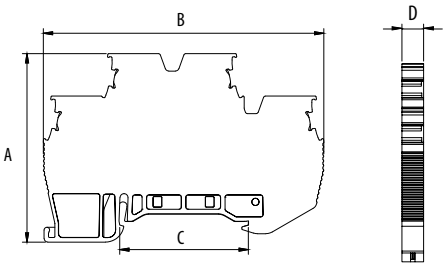

Dimension (mm)	A	B	C	D
	50,5	75,15	34,5	5,8

MATERIAL			
Body	PA6.6	Spring	Stainless Steel
Bridge	Copper	Temp.	-40 ºC, +140 ºC
Orange Button	PA6.6	Cable Strip L.	9 mm

DATA	TSE / CE	UL
Voltage	750 V	600 V
Current	17A	17A
Section	2,5 mm²	12 AWG
Norm	EN-60947-7-1	UL 1059

COLOURS			
COLOUR	V2 Code	V0 Code	Pcs.
GREY	1020459	1020486	50
CREAM	1020460	1020487	50
BLACK	1020461	1020488	50
BLUE	1020462	1020489	50
BROWN	1020463	1020490	50
RED	1020464	1020491	50
YELLOW	1020465	1020492	50
GREEN	1020466	1020493	50

ACCESSORIES

	New Code	Old Code	Section	Pcs.	See Page
Cross Connection 	1060106	1925	2,5 / 2	100	Pg. 58
	1060107	1926	2,5 / 3	100	Pg. 58
	1060108	1927	2,5 / 4	75	Pg. 58
	1060109	1928	2,5 / 10	30	Pg. 58
	1060110	1929	2,5 / 20	20	Pg. 58
Stopper	1060002	1202		100	Pg. 56
	1060005	1212		100	Pg. 57
	1060014	1222		100	Pg. 56
Group Sticker	1060024	1232		100	Pg. 57


MARKING


	New Code	Old Code	See Page
Dekafix	1060192	4440	Pg. 173
	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175, 176
Roll Label	-	8943-S11	Pg. 169



OPK - C 4

Code: 1020495



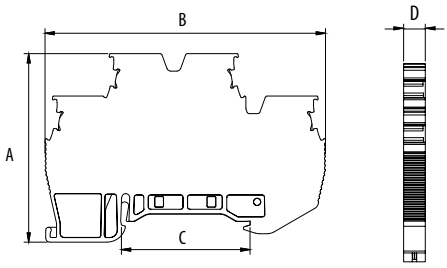

Dimension (mm)	A	B	C	D
	50,5	75,15	34,5	6,6

MATERIAL			
Body	PA6.6	Spring	Stainless Steel
Bridge	Copper	Temp.	-40 ºC, +140 ºC
Orange Button	PA6.6	Cable Strip L.	9 mm

DATA	TSE / CE	UL
Voltage	750 V	300 V
Current	32 A	22 A
Section	4 mm²	12 AWG
Norm	EN-60947-7-1	UL 1059

COLOURS			
COLOUR	V2 Code	V0 Code	Pcs.
GREY	1020495	1020522	50
CREAM	1020496	1020523	50
BLACK	1020497	1020524	50
BLUE	1020498	1020525	50
BROWN	1020499	1020526	50
RED	1020500	1020527	50
YELLOW	1020501	1020528	50
GREEN	1020502	1020529	50

ACCESSORIES

	New Code	Old Code	Section	Pcs.	See Page
Cross Connection 	1060111	1930	4 / 2	100	Pg. 58
	1060112	1931	4 / 3	100	Pg. 58
	1060113	1932	4 / 4	50	Pg. 58
	1060114	1933	4 / 10	30	Pg. 58
	1060115	1934	4 / 20	20	Pg. 58
Stopper	1060002	1202		100	Pg. 56
	1060005	1212		100	Pg. 57
	1060014	1222		100	Pg. 56
Group Sticker	1060024	1232		100	Pg. 57


MARKING


	New Code	Old Code	See Page
Dekafix	1060190	4390	Pg. 173
	1060194	4442	Pg. 173
	1060432	-	Pg. 175 - 177
	-	9540	Pg. 179
Roll Label	-	8943-S11	Pg. 169

OPK SERIES PUSH-IN CONNECTION DOUBLE RAIL TERMINAL BLOCKS



OPK - C 4
Code: 1020504
Bridged



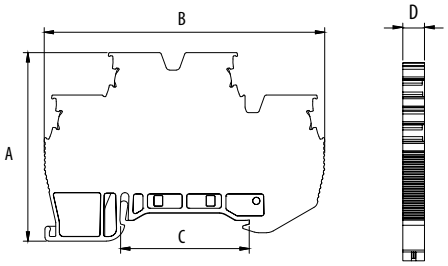

Dimension (mm)	A	B	C	D
	50,5	75,15	34,5	6,6

MATERIAL			
Body	PA6.6	Spring	Stainless Steel
Bridge	Copper	Temp.	-40 ºC, +140 ºC
Orange Button	PA6.6	Cable Strip L.	9 mm

DATA	TSE / CE	UL
Voltage	750 V	300 V
Current	32 A	22 A
Section	4 mm²	12 AWG
Norm	EN-60947-7-1	UL 1059

COLOURS

COLOUR	V2 Code	V0 Code	Pcs.
GREY	1020504	1020531	50
CREAM	1020505	1020532	50
BLACK	1020506	1020533	50
BLUE	1020507	1020534	50
BROWN	1020508	1020535	50
RED	1020509	1020536	50
YELLOW	1020510	1020537	50
GREEN	1020511	1020538	50

ACCESSORIES


	New Code	Old Code	Section	Pcs.	See Page
Cross Connection	1060111	1930	4 / 2	100	Pg. 58
	1060112	1931	4 / 3	100	Pg. 58
	1060113	1932	4 / 4	50	Pg. 58
	1060114	1933	4 / 10	30	Pg. 58
	1060115	1934	4 / 20	20	Pg. 58
Stopper	1060002	1202		100	Pg. 56
	1060005	1212		100	Pg. 57
	1060014	1222		100	Pg. 56
Group Sticker	1060024	1232		100	Pg. 57


MARKING

	New Code	Old Code	See Page
Dekafix	1060190	4390	Pg. 173
	1060194	4442	Pg. 173
	1060432	-	Pg. 175 - 177
	-	9540	Pg. 179
Roll Label	-	8943-S11	Pg. 169



OPK - C 4
Code: 1020513
Diode



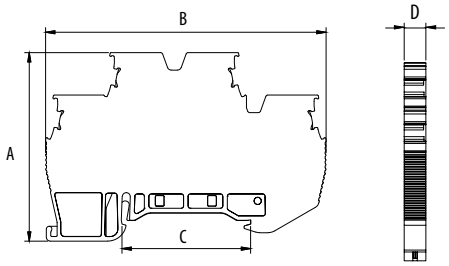

Dimension (mm)	A	B	C	D
	50,5	75,15	34,5	6,6

MATERIAL			
Body	PA6.6	Spring	Stainless Steel
Bridge	Copper	Temp.	-40 ºC, +140 ºC
Orange Button	PA6.6	Cable Strip L.	9 mm

DATA	TSE / CE	UL
Voltage	750 V	300 V
Current	1A	1A
Section	4 mm²	12 AWG
Norm	EN-60947-7-1	UL 1059

COLOURS

COLOUR	V2 Code	V0 Code	Pcs.
GREY	1020513	1020540	50
CREAM	1020514	1020541	50
BLACK	1020515	1020542	50
BLUE	1020516	1020543	50
BROWN	1020517	1020544	50
RED	1020518	1020545	50
YELLOW	1020519	1020546	50
GREEN	1020520	1020547	50


ACCESSORIES

	New Code	Old Code	Section	Pcs.	See Page
Cross Connection	1060111	1930	4 / 2	100	Pg. 58
	1060112	1931	4 / 3	100	Pg. 58
	1060113	1932	4 / 4	50	Pg. 58
	1060114	1933	4 / 10	30	Pg. 58
	1060115	1934	4 / 20	20	Pg. 58
Stopper	1060002	1202		100	Pg. 56
	1060005	1212		100	Pg. 57
	1060014	1222		100	Pg. 56
Group Sticker	1060024	1232		100	Pg. 57

MARKING


	New Code	Old Code	See Page
Dekafix	1060190	4390	Pg. 173
	1060194	4442	Pg. 173
	1060432	-	Pg. 175 - 177
	-	9540	Pg. 179
Roll Label	-	8943-S11	Pg. 169


OPK SERIES PUSH-IN CONNECTION DOUBLE RAIL TERMINAL BLOCKS

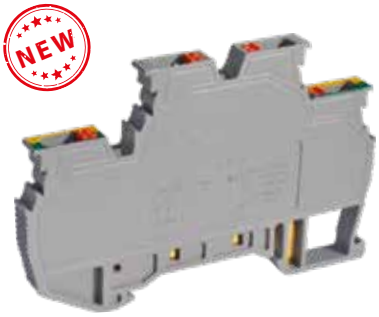

OPK - C 2,5 EARTH

Code: 1020432



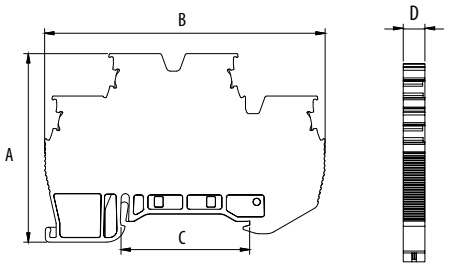


Dimension (mm)	A	B	C	D
	50,5	75,15	34,5	6,6

MATERIAL			
Body	PA6.6	Spring	Stainless Steel
Bridge	Copper	Temp.	-40 ºC, +140 ºC
Orange Button	PA6.6	Cable Strip L.	9 mm
The Foot Which Contact to the Rail	Brass		

DATA	TSE / CE	UL
Voltage	750 V	300 V
Current	32 A	22 A
Section	4 mm²	12 AWG
Norm	EN-60947-7-1	UL 1059

COLOURS			
COLOUR	V2 Code	V0 Code	Pcs.
GREY	1020432	1020434	50


ACCESSORIES					
Cross Connection	New Code	Old Code	Section	Pcs.	See Page
	1060106	1925	2,5 / 2	100	Pg. 58
	1060107	1926	2,5 / 3	100	Pg. 58
	1060108	1927	2,5 / 4	75	Pg. 58
	1060109	1928	2,5 / 10	30	Pg. 58
	1060110	1929	2,5 / 20	20	Pg. 58
Stopper	1060002	1202		100	Pg. 56
	1060005	1212		100	Pg. 57
	1060014	1222		100	Pg. 56
Group Sticker	1060024	1232		100	Pg. 57
Bridged	1020433				


MARKING			
	New Code	Old Code	See Page
Dekafix	1060192	4440	Pg. 173
	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175, 176
Roll Label	-	8943-S11	Pg. 169



OPK - C 4 EARTH

Code: 1020436



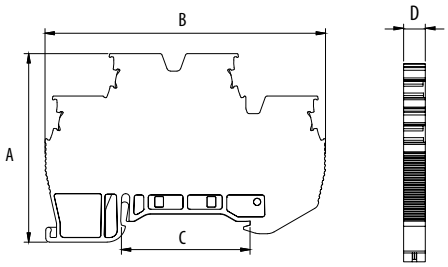


Dimension (mm)	A	B	C	D
	50,5	75,15	34,5	6,6

MATERIAL			
Body	PA6.6	Spring	Stainless Steel
Bridge	Copper	Temp.	-40 ºC, +140 ºC
Orange Button	PA6.6	Cable Strip L.	9 mm
The Foot Which Contact to the Rail	Brass		


DATA	TSE / CE	UL
Voltage	750 V	300 V
Current	32 A	22 A
Section	4 mm²	12 AWG
Norm	EN-60947-7-1	UL 1059

COLOURS			
COLOUR	V2 Code	V0 Code	Pcs.
GREY	1020436	1020438	50

ACCESSORIES					
Cross Connection	New Code	Old Code	Section	Pcs.	See Page
	1060111	1930	4 / 2	100	Pg. 58
	1060112	1931	4 / 3	100	Pg. 58
	1060113	1932	4 / 4	50	Pg. 58
	1060114	1933	4 / 10	30	Pg. 58
	1060115	1934	4 / 20	20	Pg. 58
Stopper	1060002	1202		100	Pg. 56
	1060005	1212		100	Pg. 57
	1060014	1222		100	Pg. 56
Group Sticker	1060024	1232		100	Pg. 57
Bridged	1020437				


MARKING			
	New Code	Old Code	See Page
Dekafix	1060190	4390	Pg. 173
	1060194	4442	Pg. 173
	1060432	-	Pg. 175 - 177
	-	9540	Pg. 179
Roll Label	-	8943-S11	Pg. 169


OPK SERIES PUSH-IN CONNECTION TRIPLE RAIL TERMINAL BLOCKS

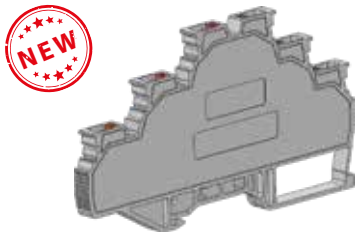

OPK-3K 2,5

Code: 1020155



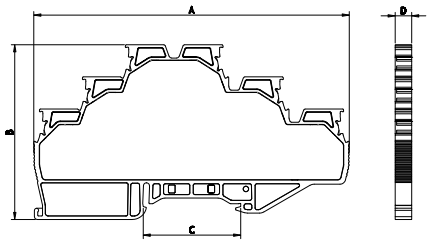

Dimension (mm)	A	B	C	D
	111,7	61,9	34,5	5,85


MATERIAL			
Body	PA6.6	Spring	Stainless Steel
Bridge	Copper	Temp.	-40 ºC, +140 ºC
Orange Button	PA6.6	Cable Strip L.	9 mm

DATA	TSE / CE
Voltage	750 V
Current	24 A
Section	2,5 mm²
Norm	EN-60947-7-1

COLOURS


	V2	V0	
COLOUR	Code	Code	Pcs.
GREY	1020155	1020216	50
CREAM	1020156		50
BLACK	1020157		50
BLUE	1020158		50
BROWN	1020159		50
RED	1020160		50
YELLOW	1020161		50
GREEN	1020162		50

ACCESSORIES

	New Code	Old Code	Section	Pcs.	See Page
Cross Connection 	1060106	1925	2,5 / 2	100	Pg. 58
	1060107	1926	2,5 / 3	100	Pg. 58
	1060108	1927	2,5 / 4	75	Pg. 58
	1060109	1928	2,5 / 10	30	Pg. 58
	1060110	1929	2,5 / 20	20	Pg. 58
Stopper	1060002	1202		100	Pg. 56
	1060005	1212		100	Pg. 57
	1060014	1222		100	Pg. 56
Group Sticker	1060024	1232		100	Pg. 57
Bridged	1020164				


MARKING


	New Code	Old Code	See Page
Dekafix	1060192	4440	Pg. 173
	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175, 176
Roll Label	-	8943-S11	Pg. 169



OPK-3K 4

Code: 1020183



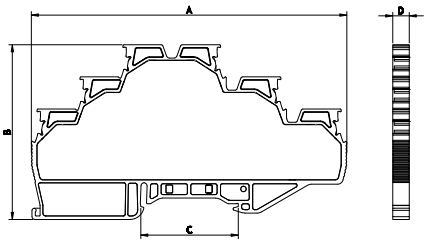

Dimension (mm)	A	B	C	D
	111,7	61,9	34,5	6,65


MATERIAL			
Body	PA6.6	Spring	Stainless Steel
Bridge	Copper	Temp.	-40 ºC, +140 ºC
Orange Button	PA6.6	Cable Strip L.	9 mm

DATA	TSE / CE
Voltage	750 V
Current	32A
Section	4 mm²
Norm	EN-60947-7-1

COLOURS

	V2	V0	
COLOUR	Code	Code	Pcs.
GREY	1020183	1020217	50
CREAM	1020184		50
BLACK	1020185		50
BLUE	1020186		50
BROWN	1020187		50
RED	1020188		50
YELLOW	1020189		50
GREEN	1020190		50


ACCESSORIES

	New Code	Old Code	Section	Pcs.	See Page
Cross Connection 	1060111	1930	4 / 2	100	Pg. 58
	1060112	1931	4 / 3	100	Pg. 58
	1060113	1932	4 / 4	50	Pg. 58
	1060114	1933	4 / 10	30	Pg. 58
	1060115	1934	4 / 20	20	Pg. 58
Stopper	1060002	1202		100	Pg. 56
	1060005	1212		100	Pg. 57
	1060014	1222		100	Pg. 56
Group Sticker	1060024	1232		100	Pg. 57
Bridged	1020192				

MARKING


	New Code	Old Code	See Page
Dekafix	1060190	4390	Pg. 173
	1060194	4442	Pg. 173
	1060432	-	Pg. 175 - 177
	-	9540	Pg. 179
Roll Label	-	8943-S11	Pg. 169


OPK SERIES PUSH-IN CONNECTION TRIPLE RAIL TERMINAL BLOCKS



OPK-3K 2,5 EARTH

Code: 1020174



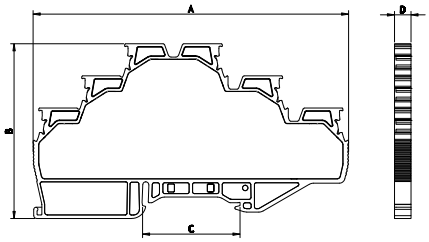

Dimension (mm)	A	B	C	D
	111,7	61,9	34,5	5,85

MATERIAL			
Body	PA6.6	Spring	Stainless Steel
Bridge	Copper	Temp.	-40 ºC, +140 ºC
Orange Button	PA6.6	Cable Strip L.	9 mm
The Foot Which Contact to the Rail	Brass		

DATA	TSE / CE
Voltage	750 V
Current	24 A
Section	2,5 mm²
Norm	EN-60947-7-2


COLOURS	V2	V0	
COLOUR	Code	Code	Pcs.
GREY	1020174	1020219	50
CREAM	1020175		50
BLACK	1020176		50
BLUE	1020177		50
BROWN	1020178		50
RED	1020179		50
YELLOW	1020180		50
GREEN	1020181		50

ACCESSORIES

	New Code	Old Code	Section	Pcs.	See Page
Cross Connection	1060106	1925	2,5 / 2	100	Pg. 58
	1060107	1926	2,5 / 3	100	Pg. 58
	1060108	1927	2,5 / 4	75	Pg. 58
	1060109	1928	2,5 / 10	30	Pg. 58
	1060110	1929	2,5 / 20	20	Pg. 58
Stopper	1060002	1202		100	Pg. 56
	1060005	1212		100	Pg. 57
	1060014	1222		100	Pg. 56
Group Sticker	1060024	1232		100	Pg. 57


MARKING


	New Code	Old Code	See Page
Dekafix	1060192	4440	Pg. 173
	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175, 176
Roll Label	-	8943-S11	Pg. 169



OPK-3K 4 EARTH

Code: 1020201



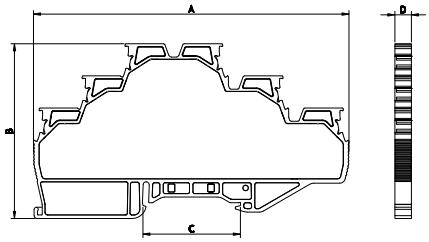

Dimension (mm)	A	B	C	D
	111,7	61,9	34,5	6,65

MATERIAL			
Body	PA6.6	Spring	Stainless Steel
Bridge	Copper	Temp.	-40 ºC, +140 ºC
Orange Button	PA6.6	Cable Strip L.	9 mm
The Foot Which Contact to the Rail	Brass		

DATA	TSE / CE
Voltage	750 V
Current	32A
Section	4 mm²
Norm	EN-60947-7-2

COLOURS	V2	V0	
COLOUR	Code	Code	Pcs.
GREY	1020201	1020220	50
CREAM	1020202		50
BLACK	1020203		50
BLUE	1020204		50
BROWN	1020205		50
RED	1020206		50
YELLOW	1020207		50
GREEN	1020208		50

ACCESSORIES

	New Code	Old Code	Section	Pcs.	See Page
Cross Connection	1060111	1930	4 / 2	100	Pg. 58
	1060112	1931	4 / 3	100	Pg. 58
	1060113	1932	4 / 4	50	Pg. 58
	1060114	1933	4 / 10	30	Pg. 58
	1060115	1934	4 / 20	20	Pg. 58
Stopper	1060002	1202		100	Pg. 56
	1060005	1212		100	Pg. 57
	1060014	1222		100	Pg. 56
Group Sticker	1060024	1232		100	Pg. 57

MARKING

	New Code	Old Code	See Page
Dekafix	1060190	4390	Pg. 173
	1060194	4442	Pg. 173
	1060432	-	Pg. 175 - 177
	-	9540	Pg. 179
Roll Label	-	8943-S11	Pg. 169

OPK SERIES PUSH-IN CONNECTION TERMINAL BLOCKS




OPK - 1IN / 2OUT - 2,5

New Code: 1020285

Old Code: 1262



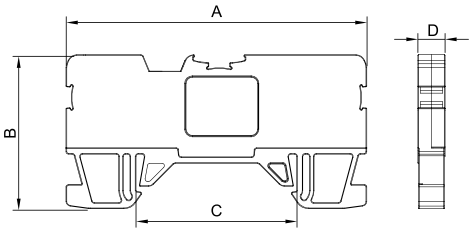

Dimension (mm)	A	B	C	D
	64,8	33,0	34,5	5,9

MATERIAL			
Body	PA6.6	Spring	Stainless Steel
Bridge	Copper	Temp.	-40 ºC, +140 ºC
Orange Button	PA6.6	Cable Strip L.	9 mm

DATA	TSE / CE
Voltage	750 V
Current	24 A
Section	2,5 mm²
Norm	EN-60947-7-1

COLOURS

	V2	V2	V0	V0	
COLOUR	New Code	Old Code	New Code	Old Code	Pcs.
GREY	1020285	1262	1020295	0662	50
CREAM	1020286	1263			50
BLACK	1020287	1264			50
BLUE	1020288	1265	1020296	0665	50
BROWN	1020289	1266			50
RED	1020290	1267	1020297	0667	50
YELLOW	1020291	1268			50
GREEN	1020292	1269			50

ACCESSORIES

	New Code	Old Code	Section	Pcs.	See Page
Cross Connection	1060106	1925	2,5 / 2	100	Pg. 58
	1060107	1926	2,5 / 3	100	Pg. 58
	1060108	1927	2,5 / 4	75	Pg. 58
	1060109	1928	2,5 / 10	30	Pg. 58
	1060110	1929	2,5 / 20	20	Pg. 58
Stopper	1060002	1202		100	Pg. 56
	1060005	1212		100	Pg. 57
	1060014	1222		100	Pg. 56
Group Sticker	1060024	1232		100	Pg. 57

MARKING


	New Code	Old Code	See Page
Dekafix	1060192	4440	Pg. 173
	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175, 176
Roll Label	-	8943-S11	Pg. 169




OPK - 2IN / 2OUT - 2,5

New Code: 1020275

Old Code: 1252



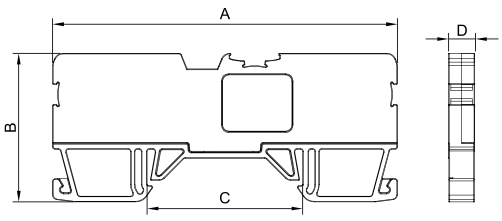

Dimension (mm)	A	B	C	D
	77,3	33,3	34,5	5,9

MATERIAL			
Body	PA6.6	Spring	Stainless Steel
Bridge	Copper	Temp.	-40 ºC, +140 ºC
Orange Button	PA6.6	Cable Strip L.	9 mm

DATA	TSE / CE
Voltage	750 V
Current	24 A
Section	2,5 mm²
Norm	EN-60947-7-1

COLOURS

	V2	V2	V0	V0	
COLOUR	New Code	Old Code	New Code	Old Code	Pcs.
GREY	1020275	1252	1020294	0652	50
CREAM	1020276	1253			50
BLACK	1020277	1254			50
BLUE	1020278	1255			50
BROWN	1020279	1256			50
RED	1020280	1257			50
YELLOW	1020281	1258			50
GREEN	1020282	1259			50


ACCESSORIES

	New Code	Old Code	Section	Pcs.	See Page
Cross Connection	1060106	1925	2,5 / 2	100	Pg. 58
	1060107	1926	2,5 / 3	100	Pg. 58
	1060108	1927	2,5 / 4	75	Pg. 58
	1060109	1928	2,5 / 10	30	Pg. 58
	1060110	1929	2,5 / 20	20	Pg. 58
Stopper	1060002	1202		100	Pg. 56
	1060005	1212		100	Pg. 57
	1060014	1222		100	Pg. 56
Group Sticker	1060024	1232		100	Pg. 57

MARKING

	New Code	Old Code	See Page
Dekafix	1060192	4440	Pg. 173
	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175, 176
Roll Label	-	8943-S11	Pg. 169


OPK SERIES PUSH-IN TEST TERMINAL BLOCKS

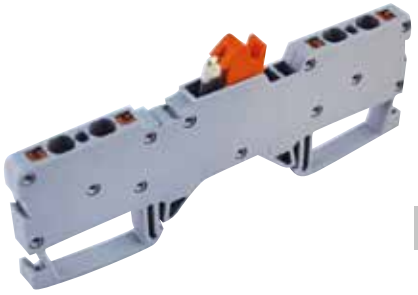


OPK - 2IN/2OUT - 2,5

New Code: 1020265

Old Code: 1242



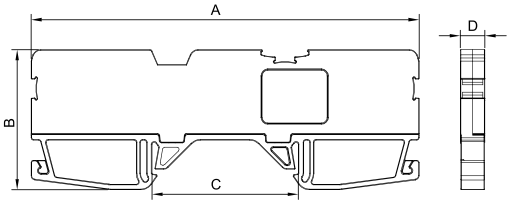

Dimension (mm)	A	B	C	D
	91,8	33,0	34,5	5,9

MATERIAL			
Body	PA6.6	Spring	Stainless Steel
Bridge	Copper	Temp.	-40 ºC, +140 ºC
Orange Button	PA6.6	Cable Strip L.	9 mm

DATA	TSE / CE
Voltage	750 V
Current	24 A
Section	2,5 mm²
Norm	EN-60947-7-1

COLOURS

	V2	V2	V0	V0	
COLOUR	New Code	Old Code	New Code	Old Code	Pcs.
GREY	1020265	1242	1020293	0642	50
CREAM	1020266	1243			50
BLACK	1020267	1244			50
BLUE	1020268	1245			50
BROWN	1020269	1246			50
RED	1020270	1247			50
YELLOW	1020271	1248			50
GREEN	1020272	1249			50

ACCESSORIES

Cross Connection	New Code	Old Code	Section	Pcs.	See Page
	1060106	1925	2,5 / 2	100	Pg. 58
	1060107	1926	2,5 / 3	100	Pg. 58
	1060108	1927	2,5 / 4	75	Pg. 58
	1060109	1928	2,5 / 10	30	Pg. 58
	1060110	1929	2,5 / 20	20	Pg. 58
Stopper	1060002	1202		100	Pg. 56
	1060005	1212		100	Pg. 57
	1060014	1222		100	Pg. 56
Group Sticker	1060024	1232		100	Pg. 57

MARKING

	New Code	Old Code	See Page
Dekafix	1060192	4440	Pg. 173
	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175, 176
Roll Label	-	8943-S11	Pg. 169

OPK SERIES PUSH-IN FUSED TERMINAL BLOCKS




OPK - S 2,5

New Code: 1020223

Old Code: 2482



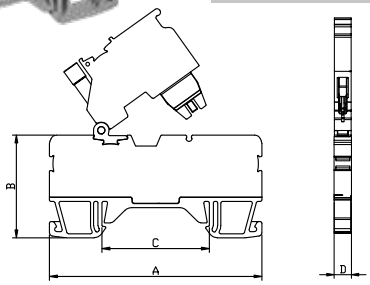

Dimension (mm)	A	B	C	D
	68,3	33,0	34,5	5,9

MATERIAL			
Body	PA6.6	Spring	Stainless Steel
Bridge	Copper	Temp.	-40 ºC, +140 ºC
Orange Button	PA6.6	Cable Strip L.	9 mm

DATA	TSE / CEw		
Voltage	750 V	Section	2,5 mm²
Current	6,3 A	Norm	EN-60947-7-1

COLOURS

	V2	V2	
COLOUR	New Code	Old Code	Pcs.
GREY	1020223	2482	50
CREAM	1020224	2483	50
BLACK	1020225	2484	50
BLUE	1020226	2485	50
BROWN	1020227	2486	50
RED	1020228	2487	50
YELLOW	1020229	2488	50
GREEN	1020230	2489	50

VOLTAGE

Volt	New Code	Old Code
Empty	1020223	2482
Bar	1020232	2492
12 V AC/DC LED	1020236	2502
24 V AC/DC LED	1020245	2512
48 V AC/DC LED	1020254	2532
110 V AC/DC LED	1020256	2552
220 V AC/DC LED	1020258	2562


ACCESSORIES

Cross Connection	New Code	Old Code	Section	Pcs.	See Page
	1060106	1925	2,5 / 2	100	Pg. 58
	1060107	1926	2,5 / 3	100	Pg. 58
	1060108	1927	2,5 / 4	75	Pg. 58
	1060109	1928	2,5 / 10	30	Pg. 58
	1060110	1929	2,5 / 20	20	Pg. 58
Stopper	1060002	1202		100	Pg. 56
	1060005	1212		100	Pg. 57
	1060014	1222		100	Pg. 56
Group Sticker	1060024	1232		100	Pg. 57
Glass Fuse	WE-FS-52	-		100	-
	5x20 mm Glass Fuse (0.2.....10A Please inform amp.)				

MARKING

	New Code	Old Code	See Page
Dekafix	1060192	4440	Pg. 173
	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175, 176


OPK SERIES PUSH-IN CONNECTION EARTH RAIL TERMINAL BLOCKS

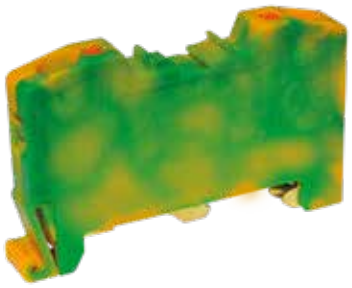


OTK - 4

New Code: 1020299

Old Code: 1199



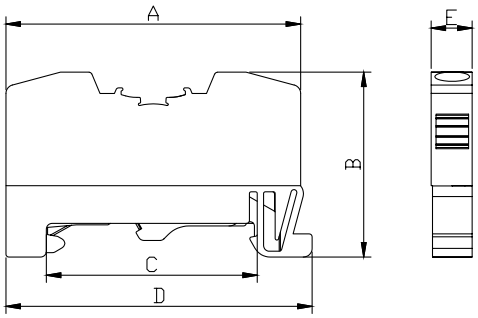

Dimension (mm)	A	B	C	D	E
	51,0	31,8	34,5	52,6	7,1


MATERIAL			
Body	PA6.6	**Spring**	Stainless Steel
Bridge	Copper	**Temp.**	-40 ºC, +140 ºC
Orange Button	PA6.6	**Cable Strip L.**	9 mm
The Foot Which Contact to the Rail	Brass		

DATA	TSE / CE
Voltage	750 V
Section	4 mm²
Norm	EN-60947-7-2

COLOURS			
COLOUR	**New Code**	**Old Code**	**Pcs.**
CAMOUFLAGE	**1020299**	1199	**100**

ACCESSORIES			
	New Code	**Old Code**	**See Page**
Stopper	**1060002**	1202	**Pg. 56**
	1060005	1212	**Pg. 57**
	1060014	1222	**Pg. 56**
Group Sticker	**1060024**	1232	**Pg. 57**


MARKING			
	New Code	**Old Code**	**See Page**
Dekafix	**1060190**	4390	**Pg. 173**
	1060194	4442	**Pg. 173**
	-	9540	**Pg. 179**
	-	9770	**Pg. 175 - 177**
Roll Label	-	8943-S11	**Pg. 169**

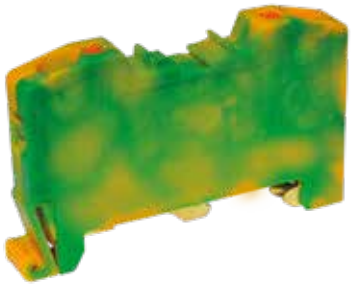


OTK - 10

New Code: 1020300

Old Code: 1200



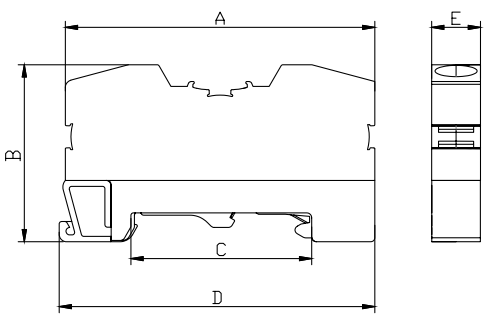

Dimension (mm)	A	B	C	D	E
	62,5	36,5	34,5	64,5	10,0

MATERIAL			
Body	PA6.6	**Spring**	Stainless Steel
Bridge	Copper	**Temp.**	-40 ºC, +140 ºC
Orange Button	PA6.6	**Cable Strip L.**	12 mm
The Foot Which Contact to the Rail	Brass		

DATA	TSE / CE
Voltage	750 V
Section	10 mm²
Norm	EN-60947-7-2

COLOURS			
COLOUR	**New Code**	**Old Code**	**Pcs.**
CAMOUFLAGE	**1020300**	1200	**100**

ACCESSORIES			
	New Code	**Old Code**	**See Page**
Stopper	**1060002**	1202	**Pg. 56**
	1060005	1212	**Pg. 57**
	1060014	1222	**Pg. 56**
Group Sticker	**1060024**	1232	**Pg. 57**

MARKING			
	New Code	**Old Code**	**See Page**
Dekafix	**1060188**	2630	**Pg. 173**
	1060194	4442	**Pg. 173**
	-	9540	**Pg. 179**
	-	9770	**Pg. 175 - 177**
Roll Label	-	8943-S11	**Pg. 169**


PUSH-IN TERMINAL BLOCK FOR PCB CONNECTION




PC-P 2,5

New Code: 1020302

Old Code: 0382



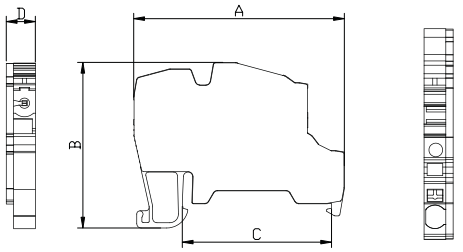

Dimension (mm)	A	B	C	D
	49,0	38,5	34,5	6,7

MATERIAL			
Body	PA6.6	Spring	Stainless Steel
Bridge	Copper	Temp.	-40 ºC, +140 ºC
Orange Button	PA6.6	Cable Strip L.	10 mm

DATA	TSE / CE
Voltage	500 V
Current	17,5 A
Section	2,5 mm^2
Norm	EN-60947-7-1

COLOURS

	V2	V2	V0	V0	
COLOUR	New Code	Old Code	New Code	Old Code	Pcs.
GREY	1020302	0382	1020304	0322	50
CREAM		0383		0323	50
BLACK		0384		0324	50
BLUE		0385		0325	50
BROWN		0386		0326	50
RED		0387		0327	50
YELLOW		0388		0328	50
GREEN		0389		0329	50

ACCESSORIES


	New Code	Old Code	Section	Pcs.	See Page
Cross Connection 	1060106	1925	2,5 / 2	100	Pg. 58
	1060107	1926	2,5 / 3	100	Pg. 58
	1060108	1927	2,5 / 4	75	Pg. 58
	1060109	1928	2,5 / 10	30	Pg. 58
	1060110	1929	2,5 / 20	20	Pg. 58
Stopper	1060002	1202		100	Pg. 56
	1060005	1212		100	Pg. 57
	1060014	1222		100	Pg. 56
Group Sticker	1060024	1232		100	Pg. 57
PCB-N End Plate	1020301	0352		10	
PCB-N End Plate (V0)	1020303	0312		10	

MARKING

	New Code	Old Code	See Page
Dekafix	1060192	4440	Pg. 173
	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175, 176
Roll Label	-	8943-S11	Pg. 169

SOCKET TERMINAL FEMALE 5,08 MM






SBDK 5,08

PIN NUMBER	Blue Order No.	Green Order No.	Pcs. Box
2	10.202	11.202	200
3	10.203	11.203	100
4	10.204	11.204	100
5	10.205	11.205	100
6	10.206	11.206	100
7	10.207	11.207	100
8	10.208	11.208	100
9	10.209	11.209	100
10	10.210	11.210	50
11	10.211	11.211	50
12	10.212	11.212	50

MRK AND OPK SERIES SCREWLESS STOPPER



Screwless Stopper
New Code: 1060002
Old Code: 1202

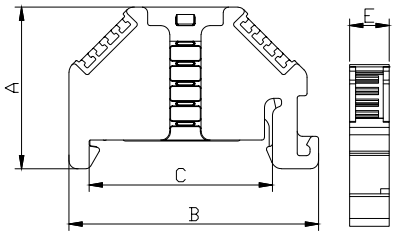

Dimension (mm)	A	B	C	D
	30,7	47,4	34,5	7,5


MATERIAL			
Body	PA	Temp.	-40 ºC, +140 ºC
Screw	Stainless Steel	Pcs	100

MARKING			
Dekafix	New Code	Old Code	See Page
	1060188	2630	Pg. 173
	1060190	4390	Pg. 173
	1060192	4440	Pg. 173
	1060194	4442	Pg. 173
	1060198	5443	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175 -177

MRK AND OPK SERIES MINI STOPPER



Mini Stopper
New Code: 1060014
Old Code: 1222

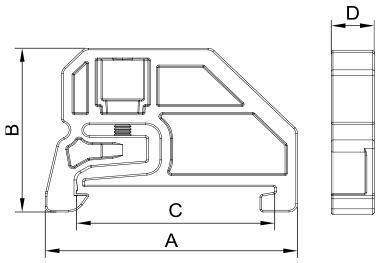

Dimension (mm)	A	B	C	D
	43,0	30,0	34,5	7,5


MATERIAL			
Body	PA	Temp.	-40 ºC, +140 ºC
Screw	Steel	Pcs	100

MARKING			
Dekafix	New Code	Old Code	See Page
	1060190	4390	Pg. 173
	1060192	4440	Pg. 173
	1060194	4442	Pg. 173
	1060198	5443	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175 -177

OPK SERIES SEPARATION PLATE



OPK Series Separation Plate
New Code: 1060053
Old Code: 0592

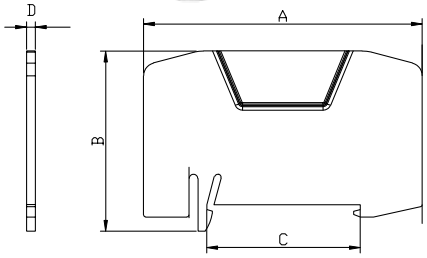


Dimension (mm)	A	B	C	D
	63,5	41,3	34,5	2,0


MATERIAL			
Body	PA	Temp.	-40 ºC, +140 ºC
Pcs	25		

COLOURS			
COLOUR	New Code	Old Code	Pcs.
GREY	1060053	0592	25
RED	1060054	0597	25

MRK AND OPK SERIES SEPARATION PLATE



Separation Plate
Code: 0999

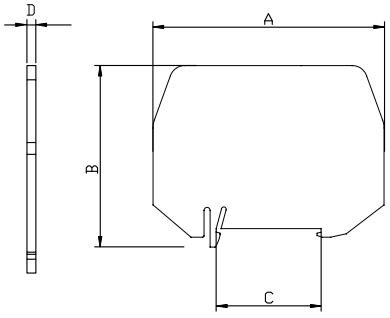


Dimension (mm)	A	B	C	D
	76,0	60,0	34,5	0,7

MATERIAL			
Body	PET (FF)	Temp.	-40 ºC, +140 ºC
Pcs	25		

MRK AND OPK SERIES BIG STOPPER



Big Stopper
New Code: 1060005
Old Code: 1212

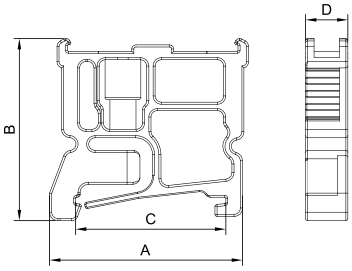

It can be marked by **"ONKA-8920-736SE/SB"** sticker.

Dimension (mm)	A	B	C	D
	44,6	43,5	34,5	9,8


MATERIAL			
Body	PA	Temp.	-40 ºC, +140 ºC
Screw	Steel	Pcs	100

MARKING	New Code	Old Code	See Page
Dekafix	1060190	4390	Pg. 173
	1060192	4440	Pg. 173
	1060194	4442	Pg. 173
	1060198	5443	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175 -177

MRK AND OPK SERIES BIG STOPPER



Stopper With Group Sticker
New Code: 1060024
Old Code: 1232




It can be marked by **"ONKA-8920-736SE/SB"** sticker.

Dimension (mm)	A	B	C	D
	44,6	43,5	34,5	9,8

MATERIAL			
Body	PA	Temp.	-40 ºC, +140 ºC
Screw	Steel	Pcs	100


MARKING	New Code	Old Code	See Page
Dekafix	1060190	4390	Pg. 173
	1060192	4440	Pg. 173
	1060194	4442	Pg. 173
	1060198	5443	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175 -177

GROUP STICKER



NEW

Group Sticker
Code: 1060500

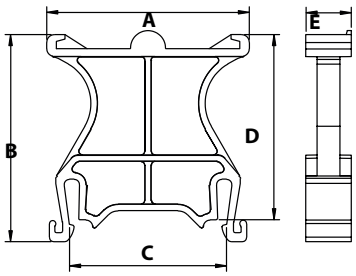

It can be marked by **"ONKA-8920-736SE/SB"** sticker.


Dimension (mm)	A	B	C	D	E
	44,5	45,5	34,5	40,7	10

MATERIAL			
Body	PA 6.6	Pcs	100
Temp.	-40 ºC, +140 ºC		

GROUP MARKER



Group Marker
New Code: 1060093
Old Code: 1482

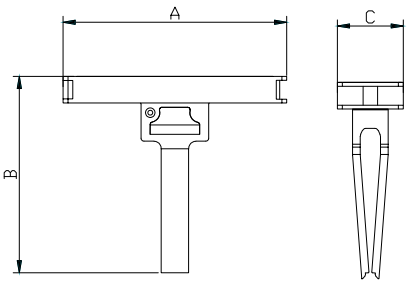

Dimension (mm)	A	B	C
	46,2	40,6	13,6

MATERIAL			
Body	PC	Temp.	-40 ºC, +140 ºC
Pcs	100		


OPK SERIES CROSS CONNECTIONS

MATERIAL	
Isolation	PA 6.6
Body	Brass
Covering	Tin


Note: All 1,5 mm², 2,5 mm² and 4 mm² cross connections can be both used for MRK and OPK Series.

For the Slim Series, please check the relevant product accessories section.

COLOUR	NEW CODE	OLD CODE	TYPE	PCS
Orange	**1060101**	ONKA-1920	1.5 x 2	100
Orange	**1060102**	ONKA-1921	1.5 x 3	100
Orange	**1060103**	ONKA-1922	1.5 x 4	100
Orange	**1060104**	ONKA-1923	1.5 x 10	30
Orange	**1060105**	ONKA-1924	1.5 x 20	20
Orange	**1060106**	ONKA-1925	2.5 x 2	100
Orange	**1060107**	ONKA-1926	2.5 x 3	100
Orange	**1060108**	ONKA-1927	2.5 x 4	75
Orange	**1060109**	ONKA-1928	2.5 x 10	30
Orange	**1060110**	ONKA-1929	2.5 x 20	20
Orange	**1060111**	ONKA-1930	4 x 2	100
Orange	**1060112**	ONKA-1931	4 x 3	100
Orange	**1060113**	ONKA-1932	4 x 4	50
Orange	**1060114**	ONKA-1933	4 x 10	30
Orange	**1060115**	ONKA-1934	4 x 20	20
Red	**1060126**	ONKA-1945	6 x 2	100
Red	**1060127**	ONKA-1946	6 x 3	50
Red	**1060128**	ONKA-1947	6 x 4	50
Red	**1060129**	ONKA-1948	6 x 10	15
Red	**1060130**	ONKA-1949	6 x 20	10
Red	**1060131**	ONKA-1950	10 x 2	100
Red	**1060132**	ONKA-1951	10 x 3	50
Red	**1060133**	ONKA-1952	10 x 4	50
Red	**1060134**	ONKA-1953	10 x 10	15
Red	**1060135**	ONKA-1954	10 x 20	10
Red	**1060136**	ONKA-1955	16 x 2	10
Red	**1060137**	ONKA-1956	16 x 3	10
Red	**1060138**	ONKA-1957	16 x 4	10
Red	**1060139**	ONKA-1958	16 x 10	10
Red	**1060140**	ONKA-1959	35 x 2	10
Red	**1060141**	ONKA-1960	35 x 3	10
Red	**1060142**	ONKA-1961	35 x 4	10
Red	**1060143**	ONKA-1962	35 x 10	10

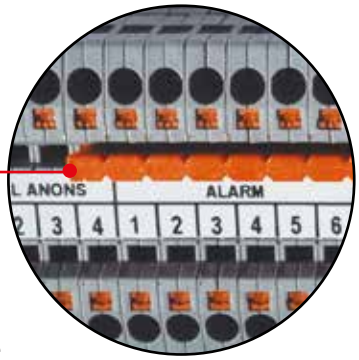

Monolithic insulated body provides high durability to the conductor busbar

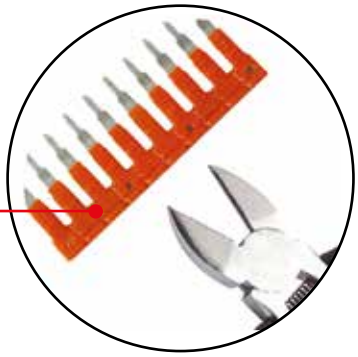




Due to the channels on the comb bridge, it gives the chance to be cut from the center of the pin gap
This feature is valid with 10 and 20 pin bridges



It can be easily disassembled with a screwdriver, by the help of the notch over the bridge



A secure connection with the bridle part

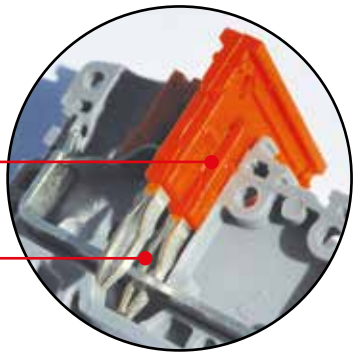


Continuous and safe contact from four points due to the diagonal structure of the pins







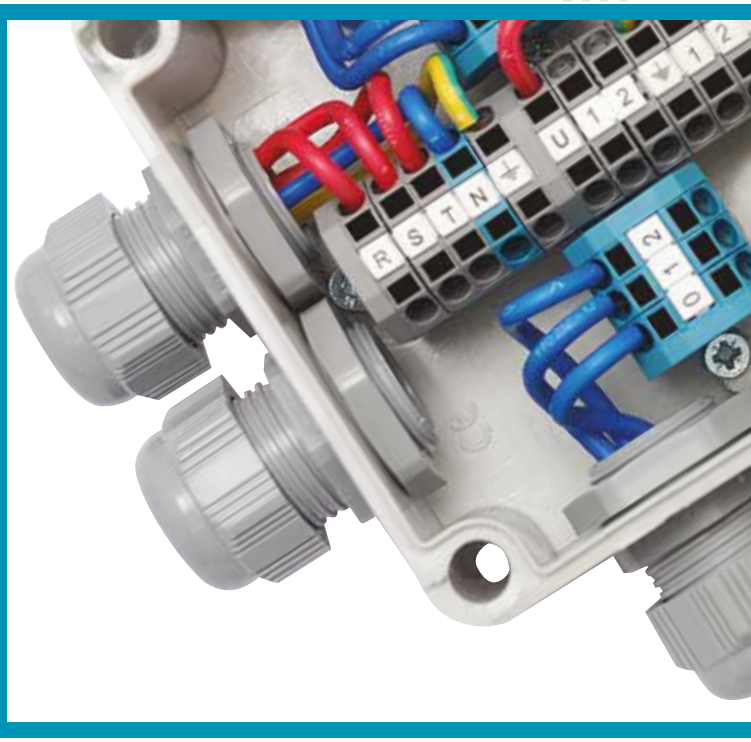

Range of Products;

- *MPK Series Push-In connection mini terminal blocks*
- *MPK Series Push-In connection mini earth terminal blocks*
- *MPK Series Push-In connection bridged mini terminal blocks*
- *MPK Series Screwless stopper*
- *MPK Series Stopper & end Bracket (Rail Mountable)*
- *MPK Series Stopper & end Bracket (Ground Mountable)*

MPK SERIES


MPK SERIES PUSH-IN CONNECTION MINI TERMINAL BLOCKS




MPK 2,5
Closed Type
New Code: 1020306
Old Code: 1422



MPK 2,5
Open Type
New Code: 1020327
Old Code: 1462

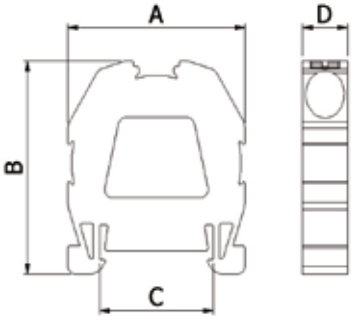

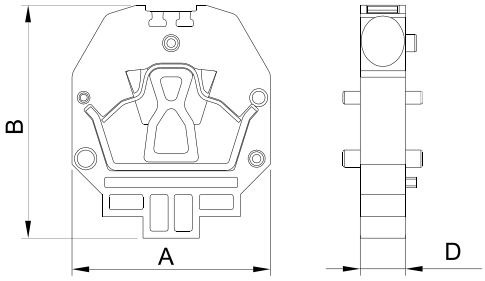

Dimension (mm)	A	B	C	D
	23,0	26,4	15,0	5,9

MATERIAL			
Body	PA6.6	Spring	Stainless Steel
Bridge	Copper	Temp.	-40 ºC, +140 ºC
Orange Button	PA6.6	Cable Strip L.	8 mm

DATA	TSE / CE
Voltage	750 V
Current	24 A
Section	2,5 mm²
Norm	EN-60947-7-1

COLOURS			
COLOUR	New Code	Old Code	Pcs.
GREY	1020306	1422	100
CREAM	1020307	1423	100
BLACK	1020308	1424	100
BLUE	1020309	1425	100
BROWN	1020310	1426	100
RED	1020311	1427	100
YELLOW	1020312	1428	100
GREEN	1020313	1429	100

ACCESSORIES			
	New Code	Old Code	See Page
Stopper	1060084	1472	Pg. 62
Rail	1100110	4247	Pg. 125
	1100115	4252	Pg. 125
	1100055	4102	Pg. 125
	1100060	4112	Pg. 125

MARKING			
Dekafix	New Code	Old Code	See Page
	-	9540	Pg. 179

Dimension (mm)	A	B	D
	23,0	27,0	5,3

MATERIAL			
Body	PA6.6	Spring	Stainless Steel
Bridge	Copper	Temp.	-40 ºC, +140 ºC
Orange Button	PA6.6	Cable Strip L.	8 mm

DATA	TSE / CE
Voltage	750 V
Current	24 A
Section	2,5 mm²
Norm	EN-60947-7-1

COLOURS			
COLOUR	New Code	Old Code	Pcs.
GREY	1020327	1462	100
CREAM	1020328	1463	100
BLACK	1020329	1464	100
BLUE	1020330	1465	100
BROWN	1020331	1466	100
RED	1020332	1467	100
YELLOW	1020333	1468	100
GREEN	1020334	1469	100

ACCESSORIES			
	New Code	Old Code	See Page
Stopper	1060034	1442	Pg. 62
	1060043	1452	Pg. 62
Rail	1100110	4247	Pg. 125
	1100115	4252	Pg. 125
	1100055	4102	Pg. 125
	1100060	4112	Pg. 125

MARKING			
Dekafix	New Code	Old Code	See Page
	-	9540	Pg. 179


MPK SERIES PUSH-IN CONNECTION EARTH MINI TERMINAL BLOCKS




MPK 2,5 (Earth) Closed Type

New Code: 1020335

Old Code: 1470



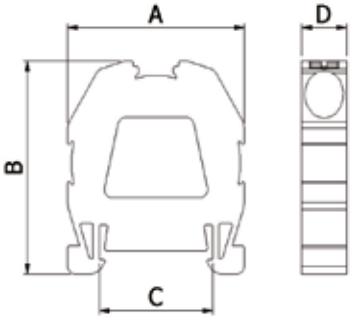

Dimension (mm)	A	B	C	D
	23,0	26,4	15,0	5,9

MATERIAL			
Body	PA6.6	**Spring**	Stainless Steel
Bridge	Copper	**Temp.**	-40 ºC, +140 ºC
Orange Button	PA6.6	**Cable Strip L.**	8 mm
The Foot Which Contact to the Rail	Brass		

DATA	TSE / CE
Voltage	750 V
Current	24 A
Section	2,5 mm²
Norm	EN-60947-7-1

COLOURS

COLOUR	New Code	Old Code	Pcs.
CAMOUFLAGE	**1020335**	1470	**100**


ACCESSORIES

	New Code	Old Code	See Page
Stopper	**1060084**	1472	Pg. 62
Rail	**1100110**	4247	Pg. 125
	1100115	4252	Pg. 125
	1100055	4102	Pg. 125
	1100060	4112	Pg. 125

MARKING

	New Code	Old Code	See Page
Dekafix	-	9540	Pg. 179

MPK SERIES PUSH-IN CONNECTION BRIDGED MINI TERMINAL BLOCKS

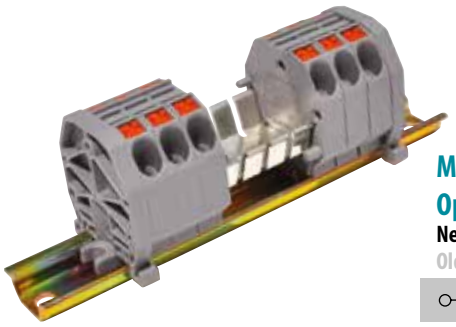


MPK 2,5 (Bridged) Open Type

New Code: 1020315

Old Code: 1432



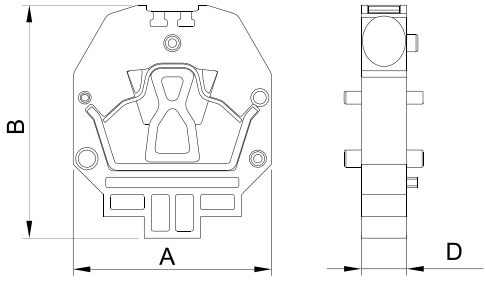

Dimension (mm)	A	B	D
	23,0	27,0	5,3

MATERIAL			
Body	PA6.6	**Spring**	Stainless Steel
Bridge	Copper	**Temp.**	-40 ºC, +140 ºC
Orange Button	PA6.6	**Cable Strip L.**	8 mm

DATA	TSE / CE
Voltage	750 V
Current	24 A
Section	2,5 mm²
Norm	EN-60947-7-1

COLOURS

COLOUR	New Code	Old Code	Pcs.
GREY	**1020315**	1432	**100**
CREAM	**1020316**	1433	**100**
BLACK	**1020317**	1434	**100**
BLUE	**1020318**	1435	**100**
BROWN	**1020319**	1436	**100**
RED	**1020320**	1437	**100**
YELLOW	**1020321**	1438	**100**
GREEN	**1020322**	1439	**100**

ACCESSORIES

	New Code	Old Code	See Page
Stopper	**1060034**	1442	Pg. 62
	1060043	1452	Pg. 62
Rail	**1100110**	4247	Pg. 125
	1100115	4252	Pg. 125
	1100055	4102	Pg. 125
	1100060	4112	Pg. 125


MARKING

	New Code	Old Code	See Page
Dekafix	-	9540	Pg. 179

MPK SERIES SCREWLESS STOPPER



MPK Stopper
New Code: 1060084
Old Code: 1472

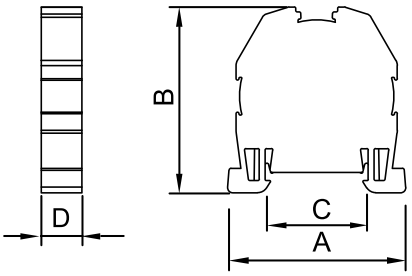

COLOURS			
COLOUR	New Code	Old Code	Pcs.
GREY	1060084	1472	100
CREAM	1060085	1473	100
BLACK	1060086	1474	100
BLUE	1060087	1475	100
BROWN	1060088	1476	100
RED	1060089	1477	100
YELLOW	1060090	1478	100
GREEN	1060091	1479	100

Dimension (mm)	A	B	C	D
	23	26,5	14,7	5,8


MATERIAL			
Body	PA6.6	Temp.	-40 ºC, +140 ºC
Metal Leg	Steel	Pcs	25

ACCESSORIES		
	New Code	Old Code
Marking	1060200	9540

MPK SERIES STOPPER & END BRACKET (GROUND MOUNTABLE)



MPK Stopper & End Bracket
New Code: 1060034
Old Code: 1442

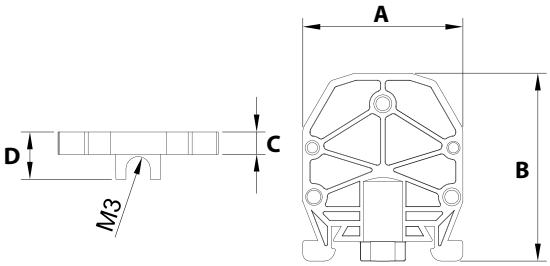


Dimension (mm)	A	B	C	D
	23,2	27,1	3,2	6,8

MATERIAL			
Body	PA6.6	Temp.	-40 ºC, +140 ºC
Pcs	100		



MPK Stopper & End Bracket
New Code: 1060043
Old Code: 1452

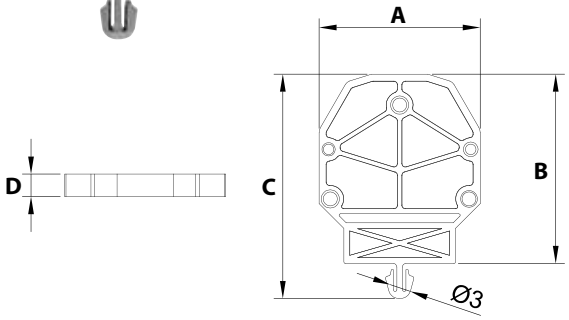


Dimension (mm)	A	B	C	D
	23,2	27,1	32,1	3,2

MATERIAL			
Body	PA6.6	Temp.	-40 ºC, +140 ºC
Pcs	100		





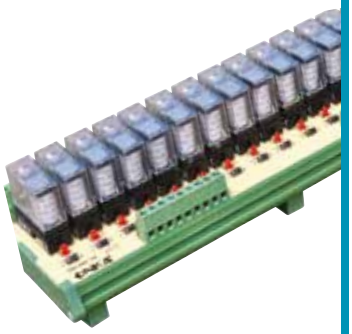




ELECTRONIC TERMINAL BLOCKS & RELAY MODULES

Range of Products;


- *Push-in connection electronic terminal blocks relays*
- *Lamp testing modules*
- *Lamp testing modules*
- *Diode cards*
- *Optocoupler modules*
- *Relay cords*

ELECTRONIC T. BLOCKS RELAY MODULES

PUSH-IN ELECTORNIC TERMINAL BLOCKS RELAYS

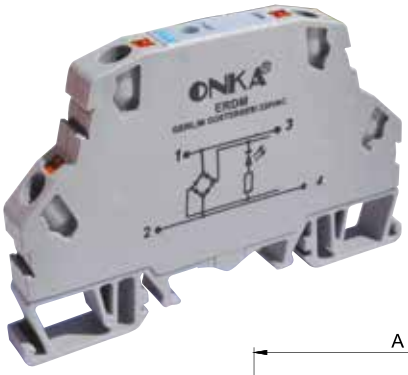

PUSH IN

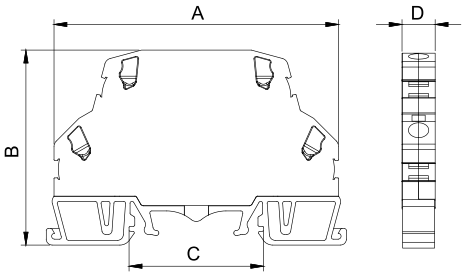

Dimension (mm)	A	B	C	D
	73,0	50,0	34,5	8,5

MATERIAL			
Body	PA6.6 v2	**Spring**	Stainless Steel
Bridge	Copper	**Temp.**	-40 ºC, +140 ºC
Orange Button	PA6.6 v2	**Cable Strip L.**	9 mm

ACCESSORIES


	New Code	Old Code	See Page
Stopper	1060002	1202	Pg. 56
	1060005	1212	Pg. 57
	1060014	1222	Pg. 56
Group Sticker	1060024	1232	Pg. 57

MARKING


	New Code	Old Code	See Page
Dekafix	1060192	4440	Pg. 173
	1060194	4442	Pg. 173
	-	9540	Pg. 179
	-	9770	Pg. 175, 176

NEW CODE	OLD CODE	DESCRIPTIONS
1050026	ONKA-600-ERDM	Reverse Current Protection Module
1050027	ONKA-601-ERDM	Coil Reverse Current Protection Module
1050028	ONKA-602-ERDM	Lamp Testing Module Single
1050029	ONKA-603-ERDM	Two Channel Diode Module
1050030	ONKA-604-ERDM	Voltage Meter 204 VDC.
1050031	ONKA-605-ERDM	Voltage Meter 220 VAC.
1050032	ONKA-606-ERDM	Voltage Meter, Reverse Current Dump 24 VDC.
1050033	ONKA-607-ERDM	Surge Protection (Varistor) 30 V.
1050034	ONKA-608-ERDM	Surge Protection (Varistor) 75 V.
1050035	ONKA-609-ERDM	Surge Protection (Varistor) 130 V.
1050036	ONKA-610-ERDM	Surge Protection (Varistor) 275 V.
1050037	ONKA-611-ERDM	Voltage Meter, Rectifier 24 VAC.
1050038	ONKA-612-ERDM	Voltage Meter, Rectifier 110 VAC.
1050039	ONKA-613-ERDM	Voltage Meter, Rectifier 220 VAC.


Onka
600-ERDM
Reverse Current Protection Module




Onka
601-ERDM
Coil Reverse Current Protection Module




Onka
602-ERDM
Lamp Testing Module Single




Onka
603-ERDM
Two Channel Diode Module




Onka
604-ERDM
Voltage Meter 204 VDC.




Onka
605-ERDM
Voltage Meter 220 VAC.




Onka
606-ERDM
Voltage Meter, Reverse Current Dump 24 VDC.



Onka
607 / 608 / 609 / 610-ERDM
Surge Protection (Varistor)



Onka
611 / 612 / 613-ERDM
Voltage Meter, Rectifier



PUSH IN





600 Reverse Current Protection Module — Coil Reverse Current Protection Module 601

Description: Prevents reverse current in case of DC voltage. When connection of coil circuit is cut off, if any contactor, relay or valve is used in DC current, reverse electromotive force which reaches 1000V can be generated. The reverse electromotive force can damage to circuit. This incident is faced in case of coils used in DC current.

602 Lamp Testing Module One Channel — Lamp Testing Module Two Channel 603

Description: Controls whether the lamps in the signal circuits are stable. Signal lamps in electrical panels or leds in mimic diagrams used in large facilities. However, in case of lamp or led failure, any problem in facilities cannot be emerged. Therefore stability of these lamps or leds need to be tested periodically. The testing can be applied by a button on lamp testing card. It is preferred because it is terminal connection where the diode is needed. Diods are used as 1a and 700v.

604 - 605 Voltage Meter / Gerilim Göstergeleri

Description: Indicates the on/off action with led for 24VDC or 220VAC in electrical systems

606 Voltage Meter, Reverse Current Dump

Description: /ndicates the on/off action with led for 24VDC in electrical systems. Additionally, protects coil with diode inside against inverse current.

607 - 608 609 - 610 Surge protection (Varistor) 30VAC-75VAC-130VAC-275VAC

Description: Varistor is a resistor. Its resistance can change depends on voltage. Therefore, shunt connection is made for circuit which is protected. In case of over voltage, short circuit generated and fuse blown.

611-612 613 Voltage Meter, Rectifier 24-110-220VAC

Description: AC current from No: 1 and No: 2 terminals is transmitted to DC current and conducted to No: 3 and No: 4 terminals. This transmission is controlled with led indication.

101 ... 107 Diode Cards



Description: Manufactured in 7 different types as 6, 12, 14 channels common anode, 14 channels common cathode 22 channel anode and cathode. Diodes are used as 1A and 700V.

120 - 121 Lamp Testing Card




Description: Controls the signal lamp in the machine or electric panel. They are manufactured as 8 channels and 16 channels.

130 ... 132 Optocoupler Modules



Description: In PLC or micro processor systems it protects the processor and PLC by electrically isolating the electronic circuit from the power circuit. This card is used as micro processor input and output it is 4 channels. It is isolated in both circuits. The work is followed by the led on.

255 .... 405 Relay Modules

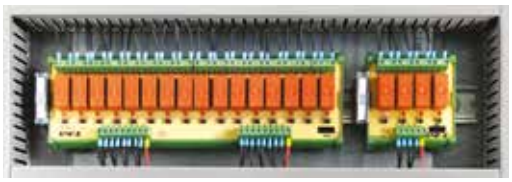

Description: Relay is a must for control panels. In our manufacture these relays are manufactured as start with led reverse current protection diode. More effective than the individial used relays. Also cheaper by decreasing of relay number. They are manufactured as 2, 4, 8,16 channels and 24 VDC, 220 VAC. This type is manufactured as with socket.

LAMP TESTING, DIODE CARDS, OPTOCOUPLER MODULES



LAMP TESTING MODULES

NEW CODE	OLD CODE	DESCRIPTIONS
1050008	ONKA-120-ELT8	Lamp Testing Card 8 Channels
1050010	ONKA-122-ELT11	Lamp Testing Card 11 Channels
1050009	ONKA-121-ELT16	Lamp Testing Card 16 Channels



DIODE CARDS

NEW CODE	OLD CODE	DESCRIPTIONS
1050001	ONKA-101-EDM6	Diode Card 6 Channels
1050002	ONKA-102-EDM8	Diode Card 8 Channels
1050003	ONKA-103-EDM12	Diode Card 12 Channels
1050004	ONKA-104-EDM14A	Diode Card 14 Channels Anode
1050005	ONKA-105-EDM14K	Diode Card 14 Channels Anode
1050006	ONKA-106-EDM22A	Diode Card 22 Channels Anode
1050007	ONKA-107-EDM22K	Diode Card 22 Channels Anode




OPTOCOUPLER MODULES

NEW CODE	OLD CODE	DESCRIPTIONS
1050011	ONKA-130-EOM-4	Optocoupler Card 4 Channels, 5VDC Input, 24 VDC, NPN
1050012	ONKA-131-EOM-4	Optocoupler Card 4 Channels, 12 VAC / DC Input, 24 VDC, NPN
1050013	ONKA-132-EOM-4	Optocoupler Card 4 Channels, 12 VAC / DC Input, 24 VDC, NPN

RELAY CARDS

SINGLE CONTACT , 2 MODULES




NEW CODE	OLD CODE	DESCRIPTION
1050014	ONKA-255-E24RMTS2 (+)	Single Contact 16 A. Relay Module Socket "+ Common" 24 VDC
1050015	ONKA-257-E24RMTS2 (-)	Single Contact 16 A. Relay Module Socket " - Common" 24 VDC
1050016	ONKA-265-E220RMTSO2	Single Contact 16 A. Relay Module Socket 220 VAC

SINGLE CONTACT , 4 MODULES




NEW CODE	OLD CODE	DESCRIPTION
1050017	ONKA-305-E24RMTS4 (+)	Single Contact 16 A. Relay Module Socket "+ Common" 24 VDC
1050018	ONKA-307-E24RMTS4 (-)	Single Contact 16 A. Relay Module Socket "- Common" 24 VDC
1050019	ONKA-315-E220RMTSO4	Single Contact 16 A. Relay Module Socket 220 VAC.

SINGLE CONTACT , 8 MODULES



NEW CODE	OLD CODE	DESCRIPTION
1050020	ONKA-355-E24RMTS8 (+)	Single Contact 16 A. Relay Module Socket "+ Common" 24 VDC
1050021	ONKA-357-E24RMTS8 (-)	Single Contact 16 A. Relay Module Socket "- Common" 24 VDC
1050022	ONKA-365-E220RMTSO8	Single Contact 16 A. Relay Module Socket 220 VAC.

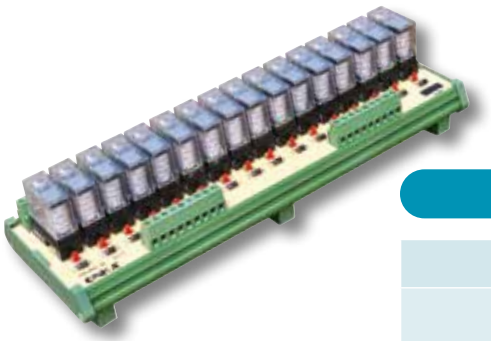

SINGLE CONTACT , 16 MODULES


NEW CODE	OLD CODE	DESCRIPTION
1050023	ONKA-401-E24RMTS16 (+)	Single Contact 16 A. Relay Module Socket "+ Common" 24 VDC
1050024	ONKA-403-E24RMTS16 (-)	Single Contact 16 A. Relay Module Socket "- Common" 24 VDC
1050025	ONKA-405-E220RMTSO16	Single Contact 16 A. Relay Module Socket 220 VAC.









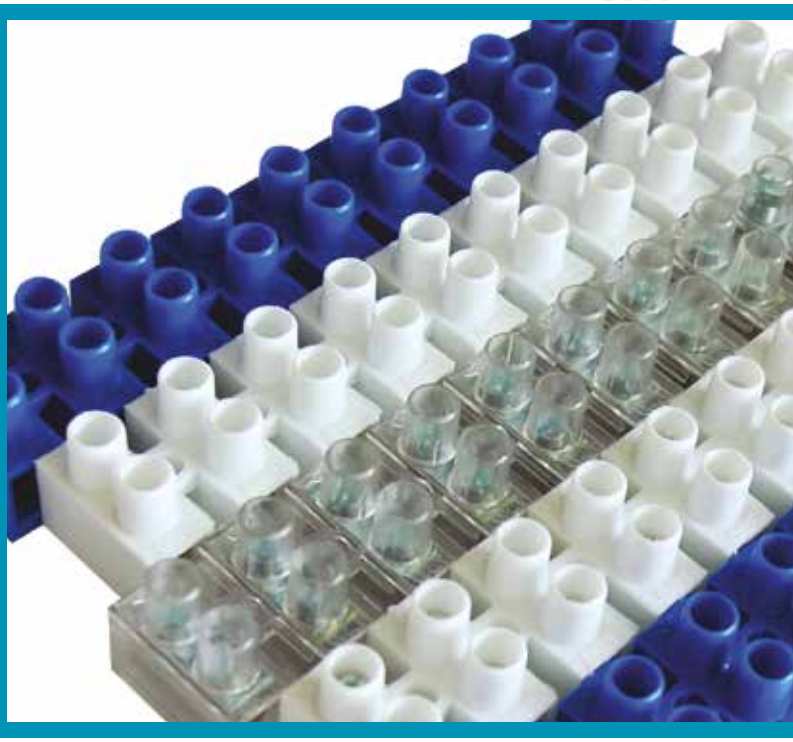


Range of Products;


- *Polypropylen plastic terminal strips*
- *Polyamide terminal strips*
- *Polycarbon terminal strips*
- *Modular socket connectors*
- *Modular equipment terminal strips*
- *Steatite Connectors*
- *Junction box terminal*
- *Wire nut connector*
- *Push-in wire connector*
- *Transformer terminal blocks*
- *Mini connectors (for aspirator)*
- *Telescopic connection terminal for Cu-Busbars (With pallet)*
- *Connection terminals for Cu- Busbars (Spring)*

TERMINAL STRIPS
SOCKET CONNECTORS
STEATITE CONNECTORS
OTHER TERMINALS


POLYPROPYLENE PLASTIC TERMINAL STRIPS





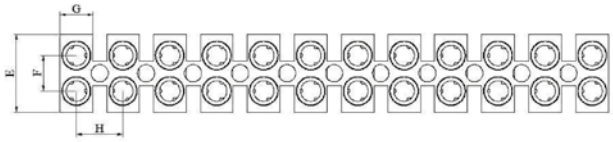

Note: The mounting hole ih the center is produced as **rounded.**




MATERIAL	
Isolation Material	PP
Contact	CK45 Steel
Work Temperature	(-20 ºC, +85 ºC)
Connection Type	Screw / Steel
Norm	EN-60998-2-1

DESCIRIPTIONS


NEW CODE	OLD CODE	No.	Pole	Torque (Nm)	C.Strip L. (mm)	Section (mm^2)	Current (A)	Voltage (V)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	Pcs.
1070015	ONKA-5000	No. 0	12	0,4	6,0	0,75 -1,5	17,5	400	91,2	13,8	8,8	2	14,8	6	5,4	7,8	100
1070016	ONKA-5001	No. 1	12	0,5	6,0	2,5 - 4	32,0	400	116	16,6	9,75	2,4	18,8	7,6	6,55	9,95	50
1070017	ONKA-5002	No. 2	12	0,8	8,0	4 - 6	41,0	400	135,3	17,6	10,3	1,3	18,8	8,7	7,7	11,6	50
1070018	ONKA-5003	No. 3	10	1,2	9,0	6 - 10	57,0	400	138,5	21,6	13,6	2,8	22,5	9,3	9,8	14,3	50
1070019	ONKA-5004	No. 4	6	2,0	10,0	10 - 16	76,0	500	96,5	25,7	15,6	3,3	29,5	11,7	12	16,9	50
1070020	ONKA-5005	No. 5	6	2,5	11,0	16 - 25	101,0	500	106,8	27,4	17,7	3	30,4	11,7	14,3	18,5	50


POLYAMIDE TERMINAL STRIPS (V2)



Note: For No.1, No.2 and No.3 terminal strips The mounting hole in the center is produced as square.



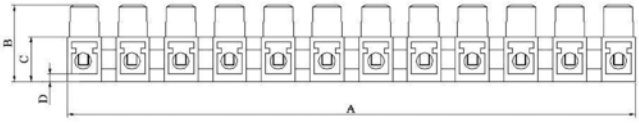

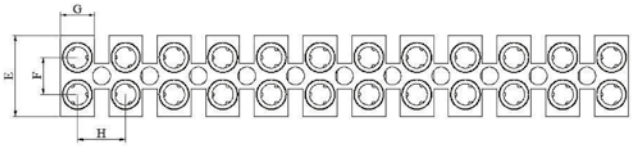


MATERIAL	
Isolation Material	PA
Contact	CK45 Steel
Connection Type	Screw / Steel
Norm	EN-60998-2-1

DESCIRIPTIONS


NEW CODE	OLD CODE	No.	Pole	Torque (Nm)	C.Strip L. (mm)	Section (mm^2)	Current (A)	Voltage (V)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	Pcs.
1070027	ONKA-5010	No. 0	12	0,4	6,0	0,75 -1,5	17,5	400	91,2	13,8	8,8	2	14,8	6	5,4	7,8	100
1070028	ONKA-5011	No. 1	12	0,5	6,0	2,5 - 4	32,0	400	116	16,6	9,75	2,15	18,8	7,6	6,55	9,95	50
1070029	ONKA-5012	No. 2	12	0,8	8,0	4 - 6	41,0	400	135,3	18,3	10,55	1,65	20,2	8,7	7,7	11,6	50
1070030	ONKA-5013	No. 3	10	1,2	9,0	6 - 10	57,0	400	138,7	21,6	13,6	2,8	22,7	9,3	10	14,3	50
1070031	ONKA-5014	No. 4	6	2,0	10,0	10 - 16	76,0	500	96,5	25,5	15,6	3	29,5	11,7	12	16,9	50
1070032	ONKA-5015	No. 5	6	2,5	11,0	16 - 25	101,0	500	106,8	27,4	17,7	3	30,4	11,7	14,3	18,5	50
1070033	ONKA-5016	No. 3	3	1,2	9,0	6 - 10	57,0	400	39,3	20,3	13,6	2,4	21,2	9,5	10,7	14,3	250


POLYCARBONATE TERMINAL STRIPS (V2)



Note: For No.1, No.2 and No.3 terminal strips The mounting hole in the center is produced as square.





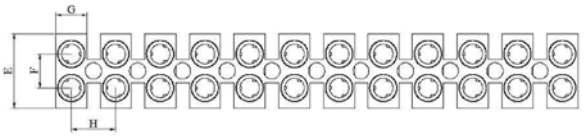


MATERIAL	
Isolation Material	Polycarbon (V2)
Contact	CK45 Steel
Work Temperature	(-40 ºC, +140 ºC)
Connection Type	Screw / Steel
Norm	EN-60998-2-1

DESCIRIPTIONS


NEW CODE	OLD CODE	No.	Pole	Torque (Nm)	C.Strip L. (mm)	Section (mm^2)	Current (A)	Voltage (V)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	Pcs.
1070034	ONKA-5020	No. 0	12	0,4	6,0	0,75 -1,5	17,5	400	91	13,9	8,9	2,1	14,9	6,0	5,5	7,9	100
1070035	ONKA-5021	No. 1	12	0,5	6,0	2,5 - 4	32,0	400	115,5	16,8	10	2,4	19,0	7,5	6,5	10,0	50
1070036	ONKA-5022	No. 2	12	0,8	8,0	4 - 6	41,0	400	134,7	18,4	10,5	1,7	20,9	8,8	7,8	11,7	50
1070037	ONKA-5023	No. 3	10	1,2	9,0	6 - 10	57,0	400	138,8	21,6	13,6	2,7	22,6	9,4	9,9	14,3	50
1070038	ONKA-5024	No. 4	6	2,0	10,0	10 - 16	76,0	500	96,5	25,6	15,6	3,1	29,6	11,7	12,0	17,0	50
1070039	ONKA-5025	No. 5	6	2,5	11,0	16 - 25	101,0	500	106,3	27,3	17,5	3,1	30	11,6	14,0	18,5	50
1070040	ONKA-5026	No. 3	3	1,2	9,0	6 - 10	57,0	400	38,4	21,6	13,6	2,7	22,6	9,4	9,9	12,8	250


POLYAMIDE TERMINAL STRIPS (V0)



Note: For No.1, No.2 and No.3 terminal strips The mounting hole in the center is produced as square.





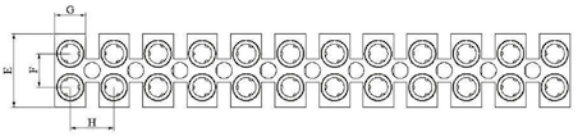

MATERIAL	
Isolation Material	PA 6.6 V0
Contact	CK45 Steel
Work Temperature	(-40 ºC, +200 ºC)
Connection Type	Screw / Steel
Norm	EN-60998-2-1


DESCIRIPTIONS

NEW CODE	OLD CODE	No.	Pole	Torque (Nm)	C.Strip L. (mm)	Section (mm^2)	Current (A)	Voltage (V)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	Pcs.
1070041	ONKA-5029	No. 0	12	0,4	6,0	0,75 -1,5	17,5	400	91,0	13,9	8,9	2,1	14,9	6,0	5,5	7,9	100
1070042	ONKA-5030	No. 1	12	0,5	6,0	2,5 - 4	32,0	400	115,5	16,8	10,0	2,4	19,0	7,5	6,5	10,0	50
1070043	ONKA-5031	No. 2	12	0,8	8,0	4 - 6	41,0	400	134,7	18,4	10,5	1,7	20,9	8,8	7,8	11,7	50
1070044	ONKA-5032	No. 3	10	1,2	9,0	6 - 10	57,0	400	138,8	21,6	13,6	2,7	22,6	9,4	9,9	14,3	50
1070045	ONKA-5033	No. 4	6	2,0	10,0	10 - 16	76,0	500	96,5	25,6	15,6	3,1	29,6	11,7	12,0	17,0	50
1070046	ONKA-5034	No. 5	6	2,5	11,0	16 - 25	101,0	500	106,3	27,3	17,5	3,1	30,0	11,6	14,0	18,5	50
1070047	ONKA-5035	No. 3	3	1,2	9,0	6 - 10	57,0	400	38,4	21,6	13,6	2,7	22,6	9,4	9,9	12,8	250


POLYAMIDE TERMINAL STRIPS WITH PALLET (V2)




No: 0 - 5 poles are avaible
N0: 2 - 2 poles and 3 poles are avaible
No: 3 - 3 poles and 5 poles are avaible



MATERIAL	
Isolation Material	PA
Contact	CK45 Steel
Work Temperature	(-40 ºC, +140 ºC)
Pallet	Ck 45 Steel
Connection Type	Screw / Steel
Norm	EN-60998-2-1






Note: For No.1, No.2 and No.3 terminal strips The mounting hole in the center is produced as square.

DESCIRIPTIONS

NEW CODE	OLD CODE	No.	Pole	Torque (Nm)	C.Strip L. (mm)	Section (mm^2)	Current (A)	Voltage (V)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	Pcs.
1070048	ONKA-5040	No. 1	12	0,5	6,0	2,5 - 4	32,0	400	116	16,6	9,75	2,15	18,8	7,6	6,55	9,95	50
1070049	ONKA-5041	No. 2	12	0,8	8,0	4 - 6	41,0	400	135,3	18,3	10,55	1,65	20,2	8,7	7,7	11,6	50
1070050	ONKA-5042	No. 3	10	1,2	9,0	6 - 10	57,0	400	138,7	21,6	13,6	2,8	22,7	9,3	10	14,3	50
1070051	ONKA-5043	No. 3	3	1,2	9,0	6 - 10	57,0	400	39,3	20,3	13,6	2,4	21,2	9,5	10,7	14,3	250

POLYCARBON TERMINAL STRIPS WITH PALLET (V2)

MATERIAL	
Isolation Material	Polycarbon (V2)
Contact	CK45 Steel
Work Temperature	(-40 ºC, +140 ºC)
Pallet	Ck 45 Steel
Connection Type	Screw / Steel
Norm	EN-60998-2-1






Note: For No.1, No.2 and No.3 terminal strips The mounting hole in the center is produced as square.

DESCIRIPTIONS

NEW CODE	OLD CODE	No.	Pole	Torque (Nm)	C.Strip L. (mm)	Section (mm^2)	Current (A)	Voltage (V)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	Pcs.
1070052	ONKA-5050	No. 1	12	0,5	6,0	2,5 - 4	32,0	400	115,5	16,8	10,0	2,4	19,0	7,5	6,5	10,0	50
1070053	ONKA-5051	No. 2	12	0,8	8,0	4 - 6	41,0	400	134,7	18,4	10,5	1,7	20,9	8,8	7,8	11,7	50
1070054	ONKA-5052	No. 3	10	1,2	9,0	6 - 10	57,0	400	138,8	21,6	13,6	2,7	22,6	9,4	9,9	14,3	50
1070055	ONKA-5053	No. 3	3	1,2	9,0	6 - 10	57,0	400	38,4	21,6	13,6	2,7	22,6	9,4	9,9	14,3	250

POLYAMIDE TERMINAL STRIPS WITH PALLET (V0)

MATERIAL	
Isolation Material	PA 6.6 V0
Contact	CK45 Steel
Work Temperature	(-40 ºC, +200 ºC)
Pallet	Ck 45 Steel
Connection Type	Screw / Steel
Norm	EN-60998-2-1






Not: No.1, No.2 ve No. 3 Sıra klemenslerde ortadaki montaj deliği kare olarak üretilmektedir.
Note: For No.1, No.2 and No.3 terminal strips The mounting hole in the center is produced as square.

DESCIRIPTIONS

NEW CODE	OLD CODE	No.	Pole	Torque (Nm)	C.Strip L. (mm)	Section (mm^2)	Current (A)	Voltage (V)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	Pcs.
1070056	ONKA-5056	No. 1	12	0,5	6,0	2,5 - 4	32,0	400	115,5	16,8	10,0	2,4	19,0	7,5	6,5	10,0	50
1070057	ONKA-5057	No. 2	12	0,8	8,0	4 - 6	41,0	400	134,7	18,4	10,5	1,7	20,9	8,8	7,8	11,7	50
1070058	ONKA-5058	No. 3	10	1,2	9,0	6 - 10	57,0	400	138,8	21,6	13,6	2,7	22,6	9,4	9,9	14,3	50
1070059	ONKA-5059	No. 3	3	1,2	9,0	6 - 10	57,0	400	38,4	21,6	13,6	2,7	22,6	9,4	9,9	14,3	250

PLASTIC PROTECTION CAPS 12 POLE

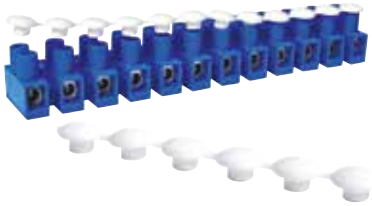

NEW CODE	OLD CODE	DESCRIPTIONS	BOX/ CARTON
1070251	ONKA-5071	Protection Caps (12)	100

MODULAR SOCKET CONNECTORS




5411



5421



5431

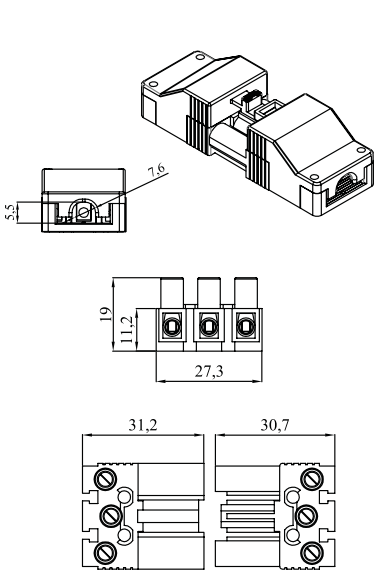


MATERIAL	
Body	PA
Contact	Brass
Screw	Steel
Temp.	-40 ºC, +140 ºC
Cable Strip L.	6 mm
Cable Sec.	2,5 mm²
Torque	0,5 Nm
Norm	EN 61984

NEW CODE	OLD CODE	DESCRIPTIONS	Color	Current (A)	Voltage (V)	Pcs. Box
1070160	ONKA-5065	No. 1 3 Pol Socket Connector	White	24	450	100
1070161	ONKA-5411		Black			100
1070164	ONKA-5066	Plastic Cover (Set)	White	24	450	45
1070166	ONKA-5421		Black			45
1070167	ONKA-5067	No. 1 3 Pole Socket Connector + Cover Set	White	24	450	45
1070168	ONKA-5431		Black			45

CONNECTION APPARATUS



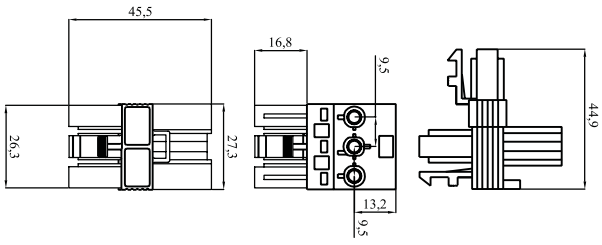

MATERIAL	
Body	PA
Contact	Brass
Screw	Steel
Temp.	-40 ºC, +140 ºC






NEW CODE	OLD CODE	DESCRIPTIONS	Color	Current (A)	Voltage (V)	Pcs. Box
1070254	ONKA-5074	2.5 - 4 mm² T Type Connection Apparatus	Black	24	450	60
1070255	ONKA-5075		White			60

6 POLE SOCKET CONNECTIORS





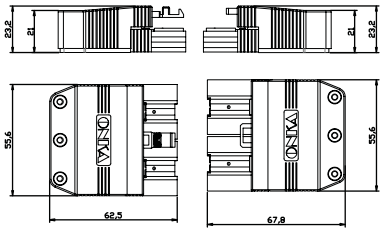


NEW CODE	OLD CODE	DESCRIPTIONS	Colour	Current (A)	Voltage (V)	Pcs. Box
1070171	ONKA-5064	No:1, 6 Pole Socket Cover Set	White	24	450	16
1070170	ONKA-5063	No:1, 6 Pole Socket Cover Set	Black	24	450	16


MATERIAL	
Body	PA
Contact	Brass
Screw	Steel
Temp.	-40 ºC, +140 ºC
Cable Strip L.	6 mm
Cable Sec.	2,5 mm²
Torque	0,5 Nm

MODULAR SOCKET CONNECTORS










NEW CODE	OLD CODE	DESCRIPTIONS	Colour	Current (A)	Voltage (V)	Pcs. Box
1070173	ONKA-5068	NO. 1 - 2 Pole Socket Connector + Modular System	WHITE	24	450	180
1070174	ONKA-5451		RED	24	450	180
1070175	ONKA-5452		BLACK	24	450	180
1070176	ONKA-5453		YELLOW	24	450	180
1070177	ONKA-5454		M. GREEN	24	450	180

MATERIAL	
Body	PA
Contact	Brass
Screw	Steel
Temp.	-40 ºC, +140 ºC
Cable Strip L.	6 mm
Cable Sec.	2,5 mm²
Torque	0,5 Nm

ACCESSORIES	Code	See Page
Marking	9540	Pg. 179
	9541	Pg. 179

12 POLE SOCKET CONNECTORS (ONE PIECE)



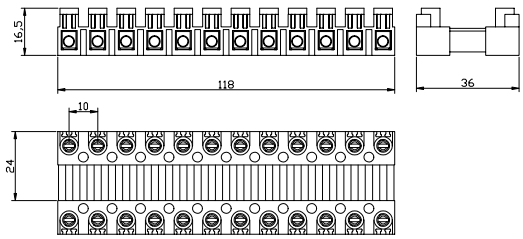


NEW CODE	OLD CODE	DESCRIPTIONS	Colour	Current (A)	Voltage (V)	Pcs. Box
1070153	ONKA-5060	No. 1 12 Pole Socket Connector 2.5 - 4 mm² (Male - Female Telescopic Lock System	WHITE	24	450	30
1070154	ONKA-5401		GRAY	24	450	30
1070155	ONKA-5402		RED	24	450	30
1070156	ONKA-5403		BLUE	24	450	30
1070157	ONKA-5404		M. GREEN	24	450	30
1070158	ONKA-5405		BLACK	24	450	30

MATERIAL	
Body	PA
Contact	Brass
Screw	Steel
Temp.	-40 ºC, +140 ºC
Cable Strip L.	6 mm
Cable Sec.	2,5 mm²
Torque	0,5 Nm

ACCESSORIES	Code	See Page
Marking	9540	Pg. 179
	9541	Pg. 179

MODULAR EQUIPMENT TERMINAL STRIPS



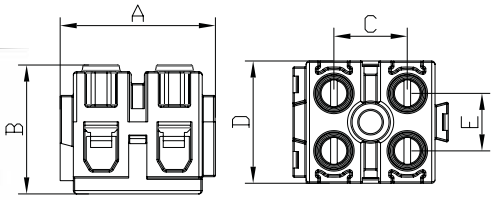

COLORS

MATERIAL	
Isolation Material	PA
Contact	CK45 Steel
Work Temperature	(-40 ºC, +140 ºC)
Connection Type	Screw / Vidalı (Steel - Çelik)
Norm	EN-60998-2-1


ACCESSORIES	New Code	Old Code
Marking	1060200	9540
	1060201	9541

	NEW CODE With Pallet	OLD CODE With Pallet	NEW CODE Without Pallet	OLD CODE Without Pallet	DESC.	Cable Section (mm^2)	Current (A)	Voltage (V)	Cable Strip Length (mm)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Pcs. Box
	1070182	ONKA - 5100		ONKA - 5175	No. 1	2,5-4	32	400	6	21,1	16,5	9,7	15,6	7,4	250
	1070196	ONKA - 5101		ONKA - 5186	No. 2	4-6	41	400	8	23,5	19,5	11,1	18,5	8,7	144
	1070204	ONKA - 5102		ONKA - 5149	No. 3	6-10	57	400	9	30,3	21,7	13,9	21,7	9,1	75
	1070188	ONKA - 5103		ONKA - 5166	No 1-3	2,5-4	32	400	6	30,7	16,5	9,3	15,6	6,7	200
	1070186	ONKA - 5163		ONKA - 5176	No. 1	2,5-4	32	400	6	21,1	16,5	9,7	15,6	7,4	250
	1070200	ONKA - 5183		ONKA - 5187	No. 2	4-6	41	400	8	23,5	19,5	11,1	18,5	8,7	144
	1070207	ONKA - 5193		ONKA - 5150	No. 3	6-10	57	400	9	30,3	21,7	13,9	21,7	9,1	75
	1070192	ONKA - 5173		ONKA - 5167	No 1-3	2,5-4	32	400	6	30,7	16,5	9,3	15,6	6,7	200
	1070187	ONKA - 5164		ONKA - 5178	No. 1	2,5-4	32	400	6	21,1	16,5	9,7	15,6	7,4	250
	1070201	ONKA - 5184		ONKA - 5189	No. 2	4-6	41	400	8	23,5	19,5	11,1	18,5	8,7	144
	1070208	ONKA - 5194		ONKA - 5152	No. 3	6-10	57	400	9	30,3	21,7	13,9	21,7	9,1	75
	1070193	ONKA - 5174		ONKA - 5169	No 1-3	2,5-4	32	400	6	30,7	16,5	9,3	15,6	6,7	200
	1070184	ONKA - 5161		ONKA - 5177	No. 1	2,5-4	32	400	6	21,1	16,5	9,7	15,6	7,4	250
	1070198	ONKA - 5181		ONKA - 5188	No. 2	4-6	41	400	8	23,5	19,5	11,1	18,5	8,7	144
	1070205	ONKA - 5191		ONKA - 5151	No. 3	6-10	57	400	9	30,3	21,7	13,9	21,7	9,1	75
	1070190	ONKA - 5171		ONKA - 5168	No 1-3	2,5-4	32	400	6	30,7	16,5	9,3	15,6	6,7	200
	1070183	ONKA - 5104	1070194	ONKA - 5196	No. 1	2,5-4	32	400	6	21,1	16,5	9,7	15,6	7,4	250
	1070197	ONKA - 5105	1070202	ONKA - 5197	No. 2	4-6	41	400	8	23,5	19,5	11,1	18,5	8,7	144
	1070203	ONKA - 5106	1070209	ONKA - 5198	No. 3	6-10	57	400	9	30,3	21,7	13,9	21,7	9,1	75
	1070189	ONKA - 5107	1070195	ONKA - 5199	No 1-3	2,5-4	32	400	6	30,7	16,5	9,3	15,6	6,7	200
	1070185	ONKA - 5162		ONKA - 5179	No. 1	2,5-4	32	400	6	21,1	16,5	9,7	15,6	7,4	250
	1070199	ONKA - 5182		ONKA - 5190	No. 2	4-6	41	400	8	23,5	19,5	11,1	18,5	8,7	144
	1070206	ONKA - 5192		ONKA - 5153	No. 3	6-10	57	400	9	30,3	21,7	13,9	21,7	9,1	75
	1070191	ONKA - 5172		ONKA - 5170	No 1-3	2,5-4	32	400	6	30,7	16,5	9,3	15,6	6,7	200

MINI TERMINAL (Aspirator Terminal)







NEW CODE	OLD CODE	DESCRIPTIONS	Current (A)	Voltage (V)	A (mm)	B (mm)	C (mm)	Pcs. Box
1070257	ONKA-5130	Mini Connector **White** 2.5 - 4 mm^2	32	400	22	16,2	7	250
1070258	ONKA-5131	Mini Connector **Black** 2.5 - 4 mm^2	32	400	22	16,2	7	250

MATERIAL	
Body	PA6.6
Contact	CK45 Steel
Screw	Steel
Temp.	-40 ºC, +140 ºC
Cable Strip L.	6 mm
Cable Sec.	2,5 - 4 mm^2
Torque	0,5 Nm
Norm	EN 60998 -2 -1

ADVANTAGES OF ONKA STEATITE TERMINALS





Steatite; Used in the production of the insulating parts having higher electrical and mechanical strength than conventional porcelain materials.

Steatite terminals contact material is special alloy steel and thermal operating temperature 1100 ºC ' reaches up. It also carries ONKA steatite terminal block on 1000 ºC 'n operating temperature automatically.

Advantages in comparison to ceramics:

- Higher mechanical strength,
- Higher dimensional stability,
- Higher temperature resistance (1000 ºC and over)
- Higher acid resistance,
- longer lifespan,
- It has an insulating surface and surface electrical leakage is zero, this material is more efficient

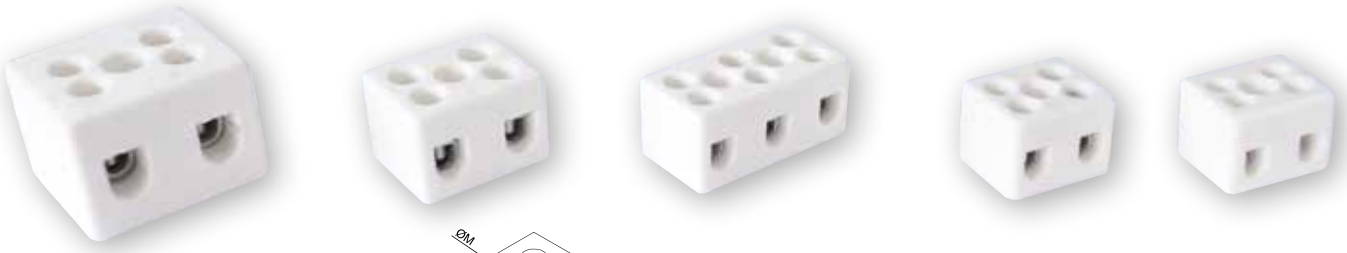

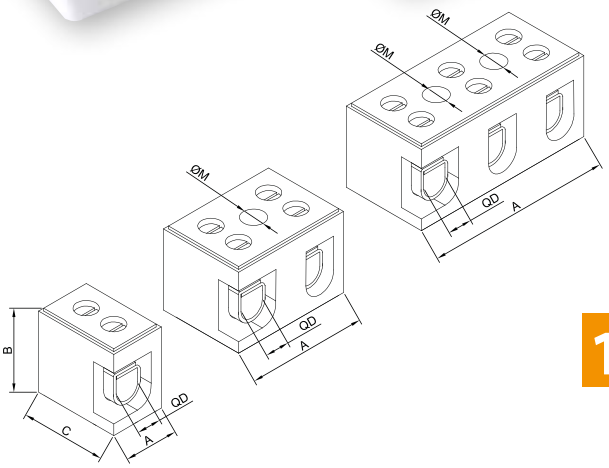

1100 °C

MATERIAL	
Isolation Material	Steatite
Contact	CK45 Steel
Work Temperature	Max. 1100 ºC
Connection Type	Screw / Steel
Norm	EN-60998-2-1

* U_{imp} : Impact strength voltage

DESCIRIPTIONS

NEW CODE	OLD CODE	Name	Pole	Cable Section (mm²)	A (mm)	B (mm)	C (mm)	DØ (mm)	MØ (mm)	Pcs.
1070001	ONKA-5081	No. 0/2	2	0,75 - 1,50	22	16,5	18,5	4	4,3	100
1070002	ONKA-5082	No. 1/2	2	2,50 - 4,00	22,5	17	19	5	4,3	150
1070003	ONKA-5083	No. 1/3	3	2,50 - 4,00	36	17	19	5	4,3	100
1070004	ONKA-5084	No. 2/2	2	4,00 - 6,00	27	18,5	22	6	4,3	100
1070005	ONKA-5085	No. 2/3	3	4,00 - 6,00	40	18,5	22	6	4,3	50
1070006	ONKA-5086	No. 3/2	2	6,00 - 10,00	34	24,5	30	7	5,2	50
1070007	ONKA-5087	No. 3/3	3	6,00 - 10,00	51,5	25	30	7	5,2	35
1070008	ONKA-5088	No. 0/1	1	0,75 - 1,50	11	16,5	18,5	4	-	200
1070009	ONKA-5089	No. 1/1	1	2,50 - 4,00	11,5	17	19	5	-	200
1070010	ONKA-5090	No. 2/1	1	4,00 - 6,00	12	18,8	22	6	-	150
1070011	ONKA-5091	No. 3/1	1	6,00 - 10,00	17	25	30,3	7	-	100
1070013	ONKA-5094	No. 4-5/3	3	16,00 - 25,00	65,6	30	30	11	5,2	20
1070014	ONKA-5095	No. 5/2	2	16,00 - 25,00	42	30	30	11	5,2	20


JUNCTION BOX TERMINAL (TRANSPARENT / COLOURFUL)








MATERIAL	
Body	Polycarbonate
Contact	CK45 Steel
Screw	Steel
Temp.	-40 ºC, +140 ºC
Cable Strip L.	10 mm
Torque	0,5 Nm

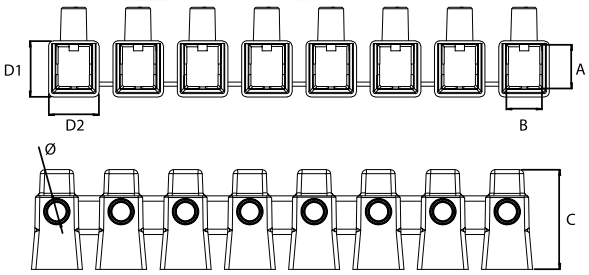

NEW CODE	OLD CODE	DESCRIPTIONS	Cable Section	Current (A)	Voltage (V)	A (mm)	B (mm)	C (mm)	D1 (mm)	D2 (mm)	H (mm)	Ø (mm)	Pcs.
1070214	ONKA-5504	No.1	2,5-4 mm^2	32	400	6,5	5,5	13,0	9	8,0	14,0	4,5	600
1070221	ONKA-5514	No.2	4-6 mm^2	41	400	7,55	6,6	18,4	11,5	10,4	17,4	5,0	600
1070228	ONKA-5524	No.3	6-10 mm^2	57	400	8,8	7,7	22,0	12,9	11,9	20,0	6,0	600
1070235	ONKA-5534	No.4	10-16 mm^2	76	500	11,0	9,6	27,3	16,0	15,3	24,6	7,5	500
1070242	ONKA-5544	No.5	16-25 mm^2	101	500	12,8	11,2	26,0	16,8	16,4	26,0	7,4	500
1070248	ONKA-5554	No.6 - 7	25-35 mm^2	125	500	17,8	14,5	40,0	22,5	20,3	34,3	8,0	200

SCREW-ON WIRE NUT CONNECTOR







CODE	COLOR	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Pcs. Box
ONKA - 8340 / P-1	GREY	3.80	6.70	8.60	5.80	15.20	1000
ONKA - 8341 / P-2	BLUE	4.10	7.00	9.80	5.90	17.60	1000
ONKA - 8342 / P-3	ORANGE	5.00	9.90	12.20	7.80	22.00	500
ONKA - 8343 / P-4	YELLOW	6.00	11.20	14.00	7.90	24.00	500
ONKA - 8344 / P-6	RED	7.50	13.00	16.40	9.15	26.50	500

Made out of resistant thermoplastic raw material, with the norm of UL94 V-2, they have the feature to resist against 600 V for wiring and 1000 V for lighting and signalization under 105 °C operating temperature.

WIRE JONT ELECTRICAL CONNECTOR TERMINAL

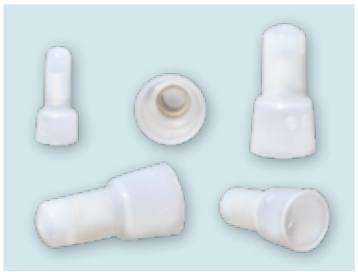




KOD	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Pcs. Box
ONKA - 8330 CE-1	2.6	6.2	7.8	6.2	18.0	1000
ONKA - 8331 CE-2	3.1	7.9	9.5	7.2	19.7	1000
ONKA - 8332 CE-5	4.1	10.5	12.5	9.6	25.5	1000
ONKA - 8333 CE-8	5.3	12.4	14.6	12.0	27.7	500

Made out of Nylon 66 raw material, with the norm of UL94 V-2, they have the feature to resist against 300V (CE-8 600V) under the 105 °C operating temperature.

PUSH-IN WIRE CONNECTOR

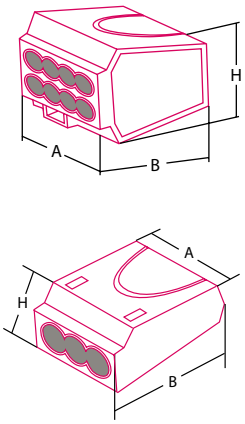


TRANSPARENT CODE	COLOUR CODE	COLOUR	CABLE CROSS SECTION	A	B	H	PCS BOX
ONKA - 8320	ONKA - 8339	2 Pole/Red	2.5 mm²	10.5	19.5	9.5	100
ONKA - 8321	ONKA - 8350	3 Pole/Orange	2.5 mm²	13.5	19.7	9.5	100
ONKA - 8322	ONKA - 8351	4 Pole/Yellow	2.5 mm²	17.2	19.7	9.5	100
ONKA - 8323	ONKA - 8352	5 Pole/Grey	2.5 mm²	21.1	19.7	9.5	100
ONKA - 8463	ONKA - 8464	6 Pole/White	2.5 mm²	22.0	19.7	9.5	100
ONKA - 8324	ONKA - 8353	8 Black	2.5 mm²	17.5	19.0	16.8	100

Thermoplastic UL 94/V2 norm, Temperature rating max. 105 °C, 600 V - 24 A

PUSH-IN WIRE CONNECTOR

- **Nominal Current: 32 A**
- **Nominal Voltage: 450 V**
- **0.14–4 mm² (24–12 AWG)**
- **0.2–4 mm² (24–12 AWG)**



CODE	DESCRIPTIONS	PCS/BOX
ONKA-8840	2 Conductive Connection	100
ONKA-8842	3 Conductive Connection	100
ONKA-8843	4 Conductive Connection	100
ONKA-8844	5 Conductive Connection	100



WIRE CONNECTOR




CODE	TYPE	LENGTH (mm)	WIDTH (mm)	SCREW	COLOR	Pcs. Box
OR - MKE 01	56 - 63	40	25	M4	BROWN	50
OR - MKE 02	71 - 80 - 90 - 100	50	30	M4	BROWN	50
OR - MKE 03	132	60	37	M5	BROWN	50
OR - MKE 04	160 - 180	72	44	M6	BROWN	40
OR - MKE 05	225 - 250	91	56	M8	BROWN	16
OR - MKE 06	280	115	70	M10	BROWN	8

TRANSFORMER TERMINAL BLOCKS






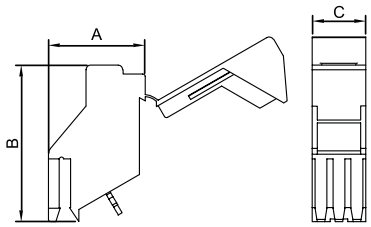


MATERIAL	
Body	PA6.6
Bridge	Copper / Silver Covering
Contact	CK45 Steel
Screw	Steel
Temp	-40 ºC, +140 ºC
Torque	0,5 Nm



CODE	DESCRIPTIONS	Current (A)	Voltage (V)	Cable Strip Length (mm)	A (mm)	B (mm)	C (mm)	D (mm)	Pcs. Box
ONKA-5135	1 x 4 mm² High Type	32	690	8	19,2	32,0	7,6	-	200
ONKA-5136	2 x 4 mm² High Type	32	690	8	19,2	32,0	15,0	-	100
ONKA-5137	1 x 6 mm² High Type	41	690	10	22,0	34,0	11,0	-	100







ACCESSORIES							
NEW CODE	OLD CODE	DESCRIPTIONS	A (mm)	B (mm)	C (mm)	D (mm)	Pcs. Box
1060204	ONKA-5139	Transformal Terminal Label Printless	6,25	4,4	0,8	3,8	500
1060205	ONKA-5140	Transformal Terminal Label Printed	6,25	4,4	0,8	3,8	500


TELESCOPIC CONNECTION TERMINAL FOR Cu BUSBARS (WITH PALLET)


















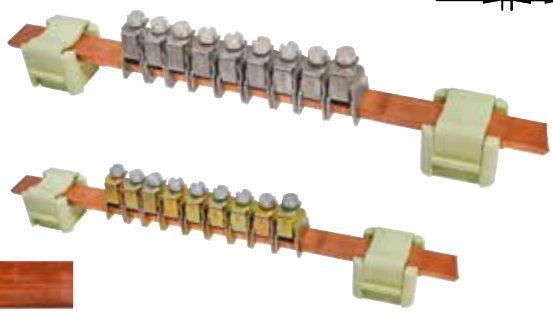



MATERIAL	
Square	CK45 Steel
Screw	Steel
Spring	DKP

NEW CODE	OLD CODE	DESCRIPTIONS	Current (A)	Voltage (V)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	Ø	Pcs. Box
-	ONKA-2159	SK12 F3, 4 mm²	80	690									300
1140011	ONKA-2160	SK12 F3, 16 mm²	80	690	9,5	16,3	1,3	6,9	16,5	3,9	12,5	M5	300
1140012	ONKA-2161	SK12 F3, 35 mm²	100	690	12,5	17,7	1,5	9,5	16,5	3,9	12,5	M5	250
-	ONKA-2162	12x3 mm Electrolitic Cu Bar 1 Mt.											1 mt.


CONNECTION TERMINALS FOR Cu - BUSBARS (SPRING)







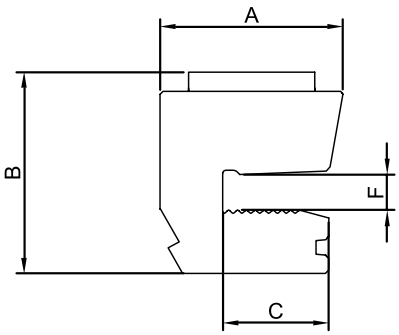


2140 2142 2144 2146

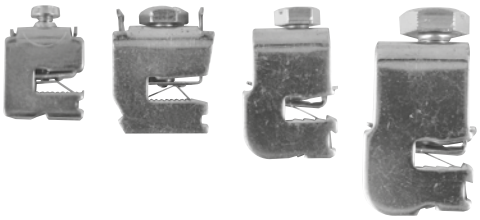



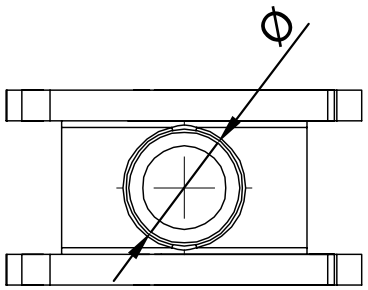

2141 2143 2145 2147

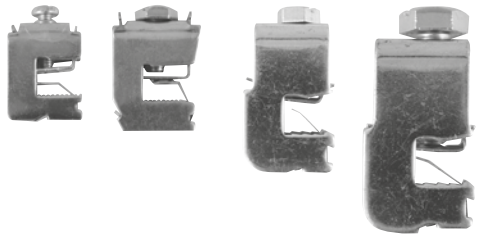


MATERIAL	
Body	DKP
Screw	Steel
Spring	DKP
Fixing spring	Stainless Steel

NEW CODE	OLD CODE	DESCRIPTIONS	Current (A)	Voltage (V)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	t (mm)	ø	Connecting Screw	Pcs. Box
1140007	ONKA-2140	SK16 F5, 1.5 - 16 mm^2	180	690	22,70	26,50	14	12	8	5,70	2	M5	PZ2	100
1140008	ONKA-2141	SK16F10, 1.5 -16 mm^2	180	690	22,70	30,30	14	12	8	10,90	2	M5	PZ2	100
1140009	ONKA-2142	SK35 F5, 1.5 - 35 mm^2	270	690	29	31	17	16	11	5,70	2,50	M8	SW13/PZ3	50
1140010	ONKA-2143	SK35F10,1.5 - 35 mm^2	270	690	29	36,0	17	16	11	10,90	2,50	M8	SW13/PZ3	50
-	**ONKA-2144**	SK70 F5, 16 - 70 mm^2	400	690	28	39	15,30	20,60	14,60	5,70	3	M8	SW13/PZ3	25
-	**ONKA-2145**	SK70F10, 16 - 70 mm^2	400	690	28	46	15,30	20,60	14,60	10,90	3	M8	SW13/PZ3	25
-	**ONKA-2146**	SK120 F5, 16 - 120 mm^2	440	690	29	45,80	15,40	23,50	17,50	5,70	3	M10	SW17/PZ4	25
-	**ONKA-2147**	SK120 F10, 16 - 120 mm^2	440	690	29	50,90	15,40	23,50	17,50	10,90	3	M10	SW17/PZ4	25

U CLAMPS



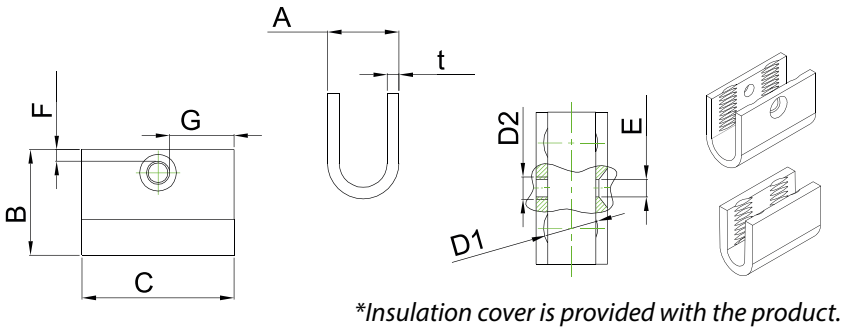


*Insulation cover is provided with the product.

CODE	CABLE SECTION	SCREW	A (mm)	t (mm)	B (mm)	C (mm)	D1	D2	E (mm)	F (mm)	G (mm)	Pcs. Box
ONKA-7050	6 mm²	STEEL	8,5	1,8	13	19	M6	-	-	-	-	300
ONKA-7051	10mm²	STEEL	10	2,2	15	21	M8	-	-	-	-	250
ONKA-7052	16mm²	STEEL	12,2	2,3	18,2	28	M10	-	-	-	-	150
ONKA-7053	25mm²	STEEL	13,8	2,5	20	30,5	7/6"	M5	6	2,25	12	100
ONKA-7054	35mm²	STEEL	14,5	2,5	23,2	32,5	M12	M5	6	2,25	13,3	75
ONKA-7055	50mm²	BRASS	16,2	3	25,4	39	M14	M5	6	2,75	16,6	50
ONKA-7056	70mm²	BRASS	19,5	3,25	28,2	43,1	M16	M5	6	4,1	18,5	40
ONKA-7057	95mm²	BRASS	21,6	3,25	31,9	45,5	M18	M6	6,5	3,5	19,5	30
ONKA-7058	120mm²	BRASS	23,5	3,4	34	50,8	M20	M6	6,5	4	22,15	20
ONKA-7059	150mm²	BRASS	28	4,4	39,1	53,9	M22	M6	7	4,4	23,45	10
ONKA-7060	U CLAMPS COVER											100


CLAWED CLAMPS



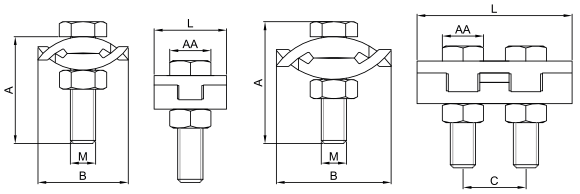

CODE	DESCRIPTIONS	A (mm)	B (mm)	L (mm)	M	AA	C	Pcs. Box
ONKA-7070	No. 1 16 mm²	25	22	17,2	M6	10	-	500
ONKA-7071	No. 2 25 mm²	25	26	20,2	M6	10	-	250
ONKA-7072	No. 3 35 mm²	25	28	30,3	M6	10	15	100
ONKA-7073	No. 4 50 mm²	25	33	32,4	M6	10	15	100
ONKA-7074	No. 5 70 mm²	35	40	35,4	M8	13	17	100
ONKA-7075	No. 6-7 120 mm²	35	49	45,1	M6	13	24	50

CAPACITOR CLAMPS

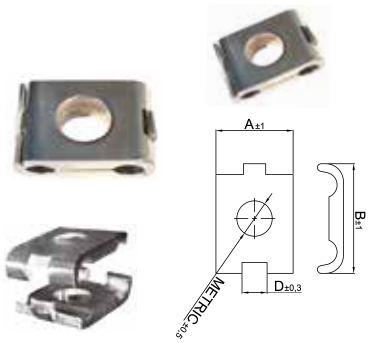

NEW CODE	OLD CODE	DESCRIPTIONS	METRIC	A x B	D	Pcs. Box
1140016	ONKA-7094	Capacitor Clamps	M12 (Ø12,3)	25,5 x 39,2 mm	10 mm	100
1140017	ONKA-7095	Capacitor Clamps	M16 (Ø16,3)	30 x 43,3 mm	9,4 mm	80
1140018	ONKA-7096	Capacitor Clamps	M14 (Ø14,5)	25,5 x 39,2 mm	10 mm	100
1140019	ONKA-7097	Capacitor Clamps	M14 (Ø14,5)	30 x 43,3 mm	9,4 mm	80
1140020	ONKA-7098	Capacitor Clamps	M12 (Ø12,3)	30 x 43,3 mm	9,4 mm	80

AL - CU CLAMPS





CODE	DESCRIPTIONS	PRESSING AREA (mm^2)	CONDUCTORS	BOX
ONKA - 7001	A 25 - B 16 AL-CU	6 - 25 Al / 25 - 16 Cu	Rose	100
ONKA - 7002	A 40 - B 25 AL-CU	16 - 40 Al / 10 - 25 Cu	Rose, Lily, Swallow, Sparrov	100
ONKA - 7003	A 70 - B 50 AL-CU	16 - 70 Al / 10 - 50 Cu	Rose, Lily, Swallow, Sparrov	50
ONKA - 7004	A 120 - B 50 AL-CU	70 - 120 Al / 10 - 50 Cu	Pannsey, Aster, Pholx, Oxlip Raven, Pigeon	50
ONKA - 7005	A 120 - B 70 AL-CU	70 - 120 Al / 10 - 70 Cu	Pannsey, Aster, Pholx, Oxlip Raven, Pigeon	50
ONKA - 7006	A 240 - B 120 AL-CU	70 - 240 Al / 50 - 120 Cu	Daisy, Peony, Tulip, Canna Patridge, Ostrich, Hawk	25
ONKA - 7007	A 240 - B 240 AL-CU	240 Al / 240 Cu	Daisy, Peony, Tulip, Canna Patridge, Ostrich, Hawk	25

AL PARALLEL GROOVE CLAMPS








CODE	DESCRIPTIONS	PRESSING AREA (mm^2)	CONDUCTORS	BOX
ONKA - 7020	A16-16 Branch	6 - 16 Al	Rose	100
ONKA - 7021	A25-25 Branch	6 - 25 Al	Rose	100
ONKA - 7022	A40-40 Branch	16 - 40 Al	Rose, Lily, Swallow, Sparrov	100
ONKA - 7023	A70-70 Branch	16 - 70 Al	Rose, Lily, Pansy, Swallow, Sparrow	50
ONKA - 7024	A95-95 Branch	25 - 95 Al	Lily, Pansy, Swallow, Aster, Rawen	50
ONKA - 7025	A120-120 Branch	40 - 120 Al	Pannsey, Aster, Pholx, Oxlip Swallow, robinone, Rawen	50
ONKA - 7026	A150-150 Branch	40 - 150 Al	Pannsey, Aster, Pholx, Oxlip Swallow, robinone, Rawen	25
ONKA - 7027	A240-240 Branch	40 - 240 Al	Daisy, Peony, Tulip, Canna Patridge, Ostrich, Hawk	25
ONKA - 7028	Clamps Cover		A70-A70/A70-B50	100

STOPPER CLAMPS





CODE	DESCRIPTIONS	PRESSING AREA (mm^2)	CONDUCTORS	BOX
ONKA - 7040	A16-A50 Stopper	16 - 50 Al	Rose, Lily, Swallow, Sparrov, Swallow	50
ONKA - 7041	A50-A95 Stopper	50 - 95 Al	Popy, Aster, Pholx, Raven, Rabinone	50
ONKA - 7042	A95-A120 Stopper	95 - 120 Al	Popy, Aster, Pholx, Raven, Rabinone	50









RAIL MOUNTING SOCKETS

Technical Features ;


- *Covered type*
- *Inlet and outlet (able to make the phase, neutral and earth connection from both sides of the top and the bottom*
- *16A, 250V*
- *Can be mounted onto the 35 x 7.5 rails*
- *Up to 10 mm^2 cable connection can be made*

Range of Products;

- *Inlet without LED*
- *Inlet-Outlet without LED*
- *Inlet with LED*
- *Inlet-Outlet with LED*
- *Inlet-UPS without LED*
- *Inlet-Outlet-UPS without LED*
- *Inlet-UPS with LED*
- *Inlet-Outlet-UPS with LED*


RAIL MOUNTING SOCKETS


RAIL MOUNTING SOCKETS (With Cover)

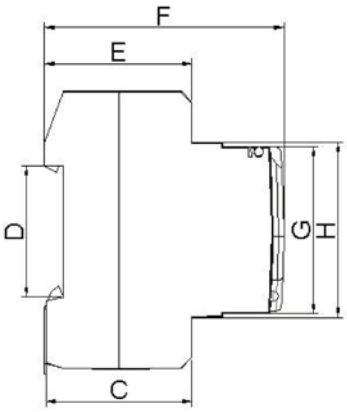









MATERIAL	
Body	PA
Bridge	Copper
Contact	CK45 Steel
Screw	Steel
Temp.	-40 ºC, +140 ºC
Leakage proof	IP20
Cable Strip L.	12 mm
Torque	0,8 Nm

DATA	TSE / CE
Voltage	750 V
Current	24 A
Section	6,0 mm^2
Norm	EN-60947-7-1

DESCIRIPTIONS

CODE	Descriptions	Current (A)	Voltage (V)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	Pcs.
ONKA-7160	Inlet without led	16,0	250	76	45,0	39,8	36,0	40,3	65,0	45,5	47,8	10
ONKA-7161	Inlet & Outlet without led	16,0	250	76	45,0	39,8	36,0	40,3	65,0	45,5	47,8	10
ONKA-7162	Inlet with led	16,0	250	76	45,0	39,8	36,0	40,3	65,0	45,5	47,8	10
ONKA-7163	Inlet & Outlet with led	16,0	250	76	45,0	39,8	36,0	40,3	65,0	45,5	47,8	10
ONKA-7164	Inlet & UPS without led	16,0	250	76	45,0	39,8	36,0	40,3	65,0	45,5	47,8	10
ONKA-7165	Inlet & Outlet UPS without led	16,0	250	76	45,0	39,8	36,0	40,3	65,0	45,5	47,8	10
ONKA-7166	Inlet & UPS with led	16,0	250	76	45,0	39,8	36,0	40,3	65,0	45,5	47,8	10
ONKA-7167	Inlet & Outlet UPS with led	16,0	250	76	45,0	39,8	36,0	40,3	65,0	45,5	47,8	10









POLYAMIDE CABLE GLAND

Technical Features;


IP Degree : IP68
Operating Temperature :-30 °c ,+80 °C
RAL : 7001, 7035, 9005
Material : PA 6
Standards : TS EN 62444, EN 60423

Range of Products;

- *PG Type IP 68 polyamide cable gland*
- *Metric type IP 68 polyamide cable gland*
- *PG type IP 54 polimide blind stop*
- *IP 54 rubber blind stop*
- *PG type poliamide nut*
- *Metric type poliamide nut*
- *PG type IP 68 spiral cable gland*
- *Metric type IP 68 spiral cable gland*
- *Panel air flow blind stop*
- *IP 54 panel air flow equpment*
- *IP 54 drainage equpment*

POLYAMIDE CABLE GLAND

PG TYPE IP 68 POLYAMIDE CABLE GLAND



ORING








Ral 7035

Ral 7001

Ral 9005

NEW CODE	OLD CODE	NEW CODE (With ORING)	OLD CODE (With ORING)	COLOUR (RAL)	SIZE	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	BOX	CARTON
1110049	ONKA-9101	**1110065**	ONKA-9080	7035									
1110001	ONKA-9000	**1110017**	ONKA-9058	7001	PG-7	12,5	19	7,8	15	3-6	15	450	6750
1110096	ONKA-9102	**1110112**	ONKA-9123	9005									
1110050	ONKA-9111	**1110066**	ONKA-9081	7035									
1110002	ONKA-9001	**1110018**	ONKA-9059	7001	PG-9	15	22	8	19	4-8	19	300	4500
1110097	ONKA-9112	**1110113**	ONKA-9124	9005									
1110051	ONKA-9121	**1110067**	ONKA-9082	7035									
1110003	ONKA-9002	**1110019**	ONKA-9060	7001	PG-11	18,4	24	8	22	5-10	22	200	3000
1110098	ONKA-9122	**1110114**	ONKA-9125	9005									
1110052	ONKA-9131	**1110068**	ONKA-9083	7035									
1110004	ONKA-9003	**1110020**	ONKA-9061	7001	PG-13,5	20	27	10	24	6-12	24	175	2625
1110099	ONKA-9132	**1110115**	ONKA-9126	9005									
1110053	ONKA-9141	**1110069**	ONKA-9084	7035									
1110005	ONKA-9004	**1110021**	ONKA-9062	7001	PG-16	22	30	10	27	10-14	27	125	1875
1110100	ONKA-9142	**1110116**	ONKA-9127	9005									
1110054	ONKA-9151	**1110070**	ONKA-9085	7035									
1110006	ONKA-9005	**1110022**	ONKA-9063	7001	PG-21	28	36	11	33	13-18	33	75	1125
1110101	ONKA-9152	**1110117**	ONKA-9128	9005									
1110055	ONKA-9161	**1110071**	ONKA-9086	7035									
1110007	ONKA-9006	**1110023**	ONKA-9064	7001	PG-29	37	46	11	42	18-25	42	40	600
1110102	ONKA-9162	**1110118**	ONKA-9129	9005									
1110056	ONKA-9171	**1110072**	ONKA-9087	7035									
1110008	ONKA-9007	**1110024**	ONKA-9065	7001	PG-36	47	61	16,9	53	22-32	53,5	20	300
1110103	ONKA-9172	**1110119**	ONKA-9130	9005									
1110057	ONKA-9181	**1110073**	ONKA-9088	7035									
1110009	ONKA-9008	**1110025**	ONKA-9066	7001	PG-42	54	65	13,6	60	32-38	60	15	225
1110104	ONKA-9182	**1110120**	ONKA-9133	9005									
1110058	ONKA-9191	**1110074**	ONKA-9089	7035									
1110010	ONKA-9009	**1110026**	ONKA-9067	7001	PG-48	60	70	13,6	65	37-44	65,5	12	180
1110105	ONKA-9192	**1110121**	ONKA-9134	9005									

METRIC TYPE IP 68 POLYAMIDE CABLE GLAND



ORİNG




Ral 7035

Ral 7001

Ral 9005

NEW CODE	OLD CODE	NEW CODE (With ORING)	OLD CODE (With ORING)	COLOUR (RAL)	SIZE	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	BOX	CARTON
1110059	ONKA-9201	**1110075**	ONKA-9113	7035									
1110011	ONKA-9050	**1110027**	ONKA-9103	7001	M12X1,5	12	19	6,2	15	3-6,5	15	450	6750
1110106	ONKA-9202	**1110122**	ONKA-9135	9005									
1110060	ONKA-9211	**1110076**	ONKA-9114	7035									
1110012	ONKA-9051	**1110028**	ONKA-9104	7001	M16X1,5	16	22	8,3	22	5-10	22	200	3000
1110107	ONKA-9212	**1110123**	ONKA-9136	9005									
1110061	ONKA-9221	**1110077**	ONKA-9115	7035									
1110013	ONKA-9052	**1110029**	ONKA-9105	7001	M20X1,5	20	26	9,6	24	6-12	24	150	2250
1110108	ONKA-9222	**1110124**	ONKA-9137	9005									
1110062	ONKA-9231	**1110078**	ONKA-9116	7035									
1110014	ONKA-9053	**1110030**	ONKA-9106	7001	M25X1,5	25	32	10,5	33	13-18	33	75	1125
1110109	ONKA-9232	**1110125**	ONKA-9138	9005									
1110063	ONKA-9241	**1110079**	ONKA-9117	7035									
1110015	ONKA-9054	**1110031**	ONKA-9107	7001	M32X1,5	32	41	15,8	42	18-25	42	40	600
1110110	ONKA-9242	**1110126**	ONKA-9139	9005									
1110064	ONKA-9251	**1110080**	ONKA-9118	7035									
1110016	ONKA-9055	**1110032**	ONKA-9108	7001	M40X1,5	40	50	12,5	53	24-32	54	20	300
1110111	ONKA-9252	**1110127**	ONKA-9140	9005									

PG TYPE POLYAMIDE NUTS

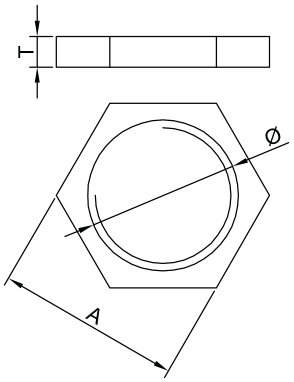




Ral 7035 Ral 7001 Ral 9005

NEW CODE	OLD CODE	COLOUR (RAL)	SIZE	A (mm)	T (mm)	Ø (mm)	Pcs
1110081	ONKA-9401	7035					
1110033	ONKA-9070	7001	PG-7	19,0	5,0	12,5	250
1110128	ONKA-9402	9005					
1110082	ONKA-9411	7035					
1110034	ONKA-9071	7001	PG-9	22,0	5,0	15,5	250
1110129	ONKA-9412	9005					
1110083	ONKA-9421	7035					
1110035	ONKA-9072	7001	PG-11	24,0	5,0	18,5	250
1110130	ONKA-9422	9005					
1110084	ONKA-9431	7035					
1110036	ONKA-9073	7001	PG-13,5	27,0	6,0	20,5	250
1110131	ONKA-9432	9005					
1110085	ONKA-9441	7035					
1110037	ONKA-9074	7001	PG-16	30,0	6,0	22,5	250
1110132	ONKA-9442	9005					
1110086	ONKA-9451	7035					
1110038	ONKA-9075	7001	PG-21	36,0	7,0	28,5	250
1110133	ONKA-9452	9005					
1110087	ONKA-9461	7035					
1110039	ONKA-9076	7001	PG-29	46,0	7,0	37,5	150
1110134	ONKA-9462	9005					
1110088	ONKA-9471	7035					
1110040	ONKA-9077	7001	PG-36	60,0	7,3	47,0	100
1110135	ONKA-9472	9005					
		7035					
1110041	ONKA-9078	7001	PG-42	65,0	7,4	55,0	100
		9005					
1110089	ONKA-5873	7035					
1110042	ONKA-9079	7001	PG-48	70,0	7,8	60,0	100
		9005					

METRIC TYPE POLYAMIDE NUTS

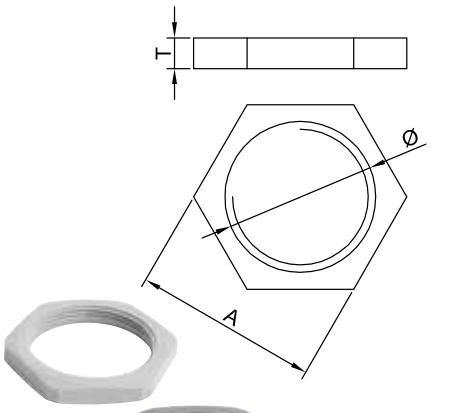


Ral 7035 Ral 7001 Ral 9005

NEW CODE	OLD CODE	COLOUR (RAL)	SIZE	A (mm)	T (mm)	Ø (mm)	Pcs
1110090	ONKA-9011	7035					
1110043	ONKA-9010	7001	M12X1,5	19,0	5,0	12,0	250
1110136	ONKA-9012	9005					
1110091	ONKA-9014	7035					
1110044	ONKA-9013	7001	M16X1,5	22,0	5,0	16,0	250
1110137	ONKA-9015	9005					
1110092	ONKA-9017	7035					
1110045	ONKA-9016	7001	M20X1,5	26,0	5,0	20,0	250
1110138	ONKA-9019	9005					
1110093	ONKA-9021	7035					
1110046	ONKA-9020	7001	M25X1,5	32,0	6,0	25,0	250
1110139	ONKA-9022	9005					
1110094	ONKA-9024	7035					
1110047	ONKA-9023	7001	M32X1,5	42,0	7,0	32,0	250
1110140	ONKA-9025	9005					
1110095	ONKA-9027	7035					
1110048	ONKA-9026	7001	M40X1,5	50,0	7,0	40,0	250
1110141	ONKA-9028	9005					

PG TYPE IP 68 SPIRAL CABLE GLANDS



Ral 7035 Ral 7001 Ral 9005

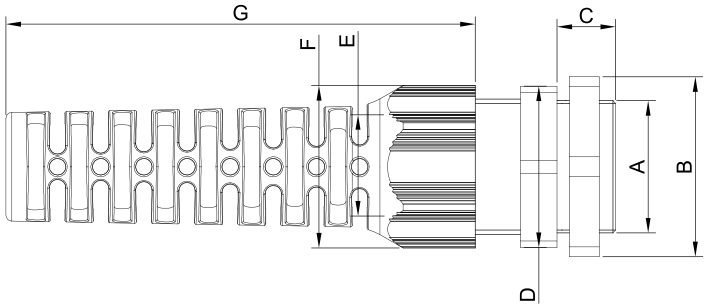


NEW CODE	OLD CODE	COLOUR (RAL)	SIZE	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	Pcs
1110152	ONKA-9276	7035									
1110142	ONKA-9275	7001	PG 7	12,5	19,0	7,8	15,0	3-6	15,0	46,5	200
1110162	ONKA-9277	9005									
1110154	ONKA-9282	7035									
1110144	ONKA-9281	7001	PG 11	18,4	25,0	8,0	22,0	5-10	22,0	68,0	100
1110164	ONKA-9283	9005									
1110155	ONKA-9285	7035									
1110145	ONKA-9284	7001	PG 13,5	20,0	27,0	10,0	24,0	6-12	24,0	77,0	80
1110165	ONKA-9286	9005									
1110157	ONKA-9291	7035									
1110147	ONKA-9290	7001	PG 21	28,0	36,0	11,0	33,0	13-18	33,0	107,0	30
1110167	ONKA-9292	9005									

METRIC TYPE IP 68 SPIRAL CABLE GLANDS



Ral 7035 Ral 7001 Ral 9005

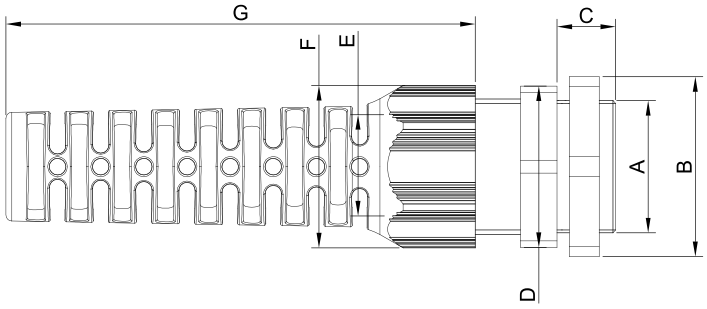

NEW CODE	OLD CODE	COLOUR (RAL)	SIZE	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	Pcs
1110158	ONKA-9476	7035									
1110148	ONKA-9475	7001	M12 x 1,5	12,0	19,0	6,2	15,0	3-6	15,0	46,5	200
1110168	ONKA-9477	9005									
1110159	ONKA-9479	7035									
1110149	ONKA-9478	7001	M16 x 1,5	16,0	22,0	8,3	22,0	5-10	22,0	68,0	100
1110169	ONKA-9480	9005									
1110160	ONKA-9482	7035									
1110150	ONKA-9481	7001	M20 x 1,5	20,0	27,0	9,7	24,0	6-12	24,0	77,0	80
1110170	ONKA-9483	9005									
1110161	ONKA-9485	7035									
1110151	ONKA-9484	7001	M25 x 1,5	25,0	36,0	10,5	33,0	13-18	33,0	107,0	30
1110171	ONKA-9486	9005									

PG ETANGE BRASS CABLE GLAND NICKEL (WITH NUT) (IP-68)



CODE	SIZE	CABLE DIAMETER (mm)	MOUNTING DIAMETER	Pcs.
REK.06.412	PG-7	3 - 6,5	12,5	50
REK.06.416	PG-9	4 - 8	15,5	50
REK.06.418	PG-11	5 - 10	19	50
REK.06.420	PG-13.5	6 - 12	20,5	50
REK.06.425	PG-16	10 - 14	22,5	50
REK.06.432	PG-21	13 - 18	28,5	25
REK.06.440	PG-29	18 - 25	37,5	20
REK.06.450	PG-36	22 - 32	47	10
REK.06.456	PG-42	30 - 38	55	10
REK.06.462	PG-48	30 - 38	60	10

METRIC ETANGE BRASS CABLE GLAND NICKEL (WITH NUT) (IP-68)



CODE	SIZE	CABLE DIAMETER (mm)	MOUNTING DIAMETER	Pcs.
REK.06.012	M12x1,5	3 - 6,5	12	50
REK.06.016	M16x1,5	4 - 8	16	50
REK.06.020	M20x1,5	6 - 12	20	50
REK.06.025	M25x1,5	10 - 14	25	50
REK.06.032	M32x1,5	13 - 18	32	25
REK.06.040	M40x1,5	18 - 25	40	25
REK.06.050	M50x1,5	22 - 32	50	10
REK.06.056	M56x1,5	30 - 38	56	10
REK.06.063	M63x1,5	30 - 38	63	10

POLYAMIDE (PA6) SPIRAL PIPE GLAND (WITH NUT)



CODE	SIZE	COLOR	SPIRAL	Pcs. (mt)
İRAGP-07	PG7	Black / Grey	PA8,5	50
İRAGP-09	PG9	Black / Grey	PA10	50
İRAGP-11	PG11	Black / Grey	PA12	50
İRAGP-13	PG13,5	Black / Grey	PA14	50
İRAGP-16	PG16	Black / Grey	PA17	50
İRAGP-21	PG21	Black / Grey	PA23	25
İRAGP-29	PG29	Black / Grey	PA29	20
İRAGM-16	M16x1,5	Black / Grey	PA12	50
İRAGM-20	M20x1,5	Black / Grey	PA17	50
İRAGM-25	M25x1,5	Black / Grey	PA23	25
İRAGM-32	M32x1,5	Black / Grey	PA29	20

PA6 POLYAMIDE SPIRAL PIPE




CODE	SIZE	COLOR	SPIRAL	Pcs. (mt)
İRAGP90-07	PG7	Black / Grey	PA8,5	25
İRAGP90-09	PG9	Black / Grey	PA10	25
İRAGP90-11	PG11	Black / Grey	PA12	25
İRAGP90-13	PG13,5	Black / Grey	PA14	25
İRAGP90-16	PG16	Black / Grey	PA17	25
İRAGP90-21	PG21	Black / Grey	PA23	25
İRAGP90-29	PG29	Black / Grey	PA29	10
İRAGP90-36	PG36	Black / Grey	PA36	10
İRAGP90-48	PG48	Black / Grey	PA48	10

PG TYPE IP 54 POLYAMIDE BLIND STOP



Ral 7035 Ral 7001 Ral 9005

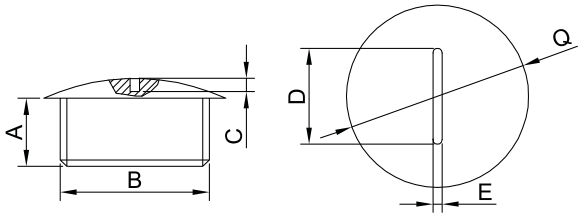

NEW CODE	OLD CODE	COLOUR (RAL)	SIZE	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Q (mm)	Pcs
1110178	ONKA-9301	7035	PG-7	6,0	12,1	2,0	8,0	1,4	15,0	250
1110172	ONKA-9090	7001								
1110184	ONKA-9302	9005								
1110179	ONKA-9311	7035	PG-9	6,0	15,0	2,0	12,0	1,4	19,0	250
1110173	ONKA-9091	7001								
1110185	ONKA-9312	9005								
1110180	ONKA-9321	7035	PG-11	11,2	18,4	1,5	11,3	1,4	22,2	250
1110174	ONKA-9092	7001								
1110186	ONKA-9322	9005								
1110181	ONKA-9331	7035	PG-13,5	11,3	20,4	1,5	11,5	1,4	24,5	250
1110175	ONKA-9093	7001								
1110187	ONKA-9332	9005								
1110182	ONKA-9341	7035	PG-16	10,3	22,3	1,8	14,0	1,4	27,5	250
1110176	ONKA-9094	7001								
1110188	ONKA-9342	9005								
1110183	ONKA-9351	7035	PG-21	8	28,0	2,0	14,8	1,9	32,7	250
1110177	ONKA-9095	7001								
1110189	ONKA-9352	9005								
		7035	PG-29	9,0	37,5	2,0	15,0	2,1	44,4	150
	ONKA-9096	7001								
		9005								
		7035	PG-36	10,0	47,5	2,5	15,0	2,1	55,5	100
	ONKA-9097	7001								
		9005								


IP 54 RUBBER BLIND STOP







CODE	SIZE	MOUNTING DIA C	Pcs
ONKA-9490	PG-13.5	17	100
ONKA-9491	PG-16	22.8	100
ONKA-9492	PG-21	28.6	100
ONKA-9493	PG-29	37.3	100
ONKA-9494	PG-36	47	100
ONKA-9495	PG-42	55	50

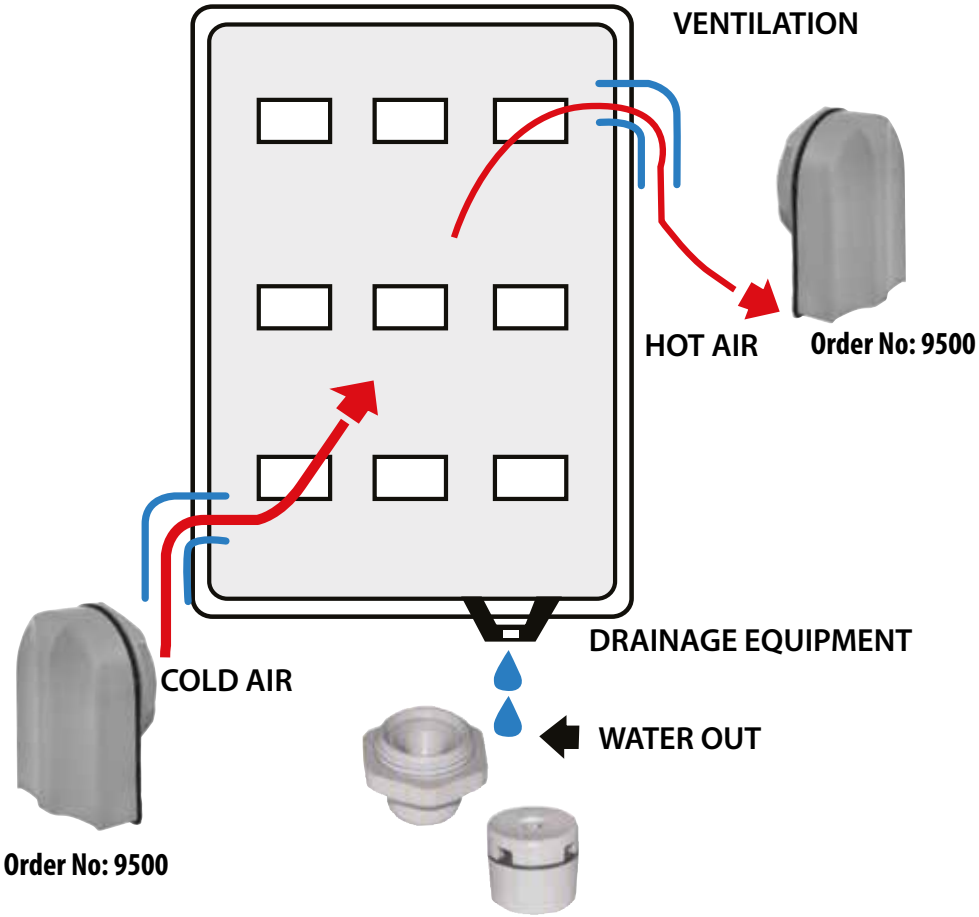




Order No: 9510





Order No: 9520

IP65 PANEL AIR FLOW EQUIPMENT





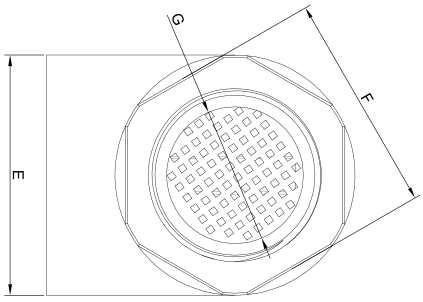

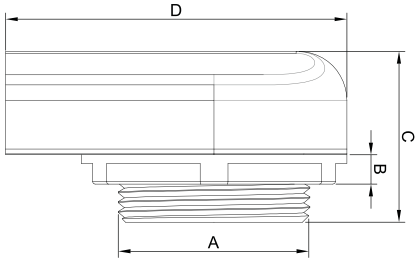


Ral 7035 Ral 7001 Ral 9005


NEW CODE	OLD CODE	COLOUR (RAL)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	Pcs
1110191	ONKA-9501	7035	M40x1,5	6,0	35,0	71,0	54,5	55,0	31,5	50
1110190	ONKA-9500	7001								
1110192	ONKA-9502	9005								


PANEL AIR FLOW BLINDSTOP






















NEW CODE	OLD CODE	COLOUR (RAL)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	Pcs
1110194	ONKA-9511	7035	M25x1,5	4,4	18,0	30,0	4,0	3,0	11,0	100
1110193	ONKA-9510	7001								
1110195	ONKA-9512	9005								

IP 54 DRAINAGE EQUPMENT







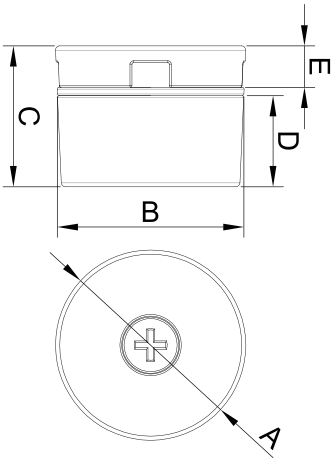

NEW CODE	OLD CODE	COLOUR (RAL)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	Pcs
1110197	ONKA-9521	7035	23,0	22,8	17,0	10,5	5,0	4,0	14,5	100
1110196	ONKA-9520	7001								
1110198	ONKA-9522	9005								

PLASTIC SPIRAL PIPE (BLACK)




CODE	DESCIRIPTIONS	Pcs.
M-020 400014 00 11	Ø 14	100
M-020 400016 00 11	Ø 16	100
M-020 400018 00 11	Ø 18	50
M-020 400020 00 11	Ø 20	50
M-020 400026 00 11	Ø 26	50
M-020 400032 00 11	Ø 32	50
M-020 400040 00 11	Ø 40	25
M-020 400050 00 11	Ø 50	25

POLIAMIDE (PA) / POLYPROPYLENE (pp) SPIRAL PIPE





CODE (PA)	CODE (pp)	SIZE	COLOR	INNER DIA. (mm)	OUTER DIA. (mm)	Pcs. (mt)
İRPA6-07	İRPP-07	PA7	Black / Grey	6,5	10,0	100
İRPA6-8,5	İRPP-8,5	PA8,5	Black / Grey	8,5	12,0	100
İRPA6-10	İRPP-10	PA10	Black / Grey	10,0	13,0	100
İRPA6-12	İRPP-12	PA12	Black / Grey	12,0	16,0	50
İRPA6-14	İRPP-14	PA14	Black / Grey	14,0	18,5	50
İRPA6-17	İRPP-17	PA17	Black / Grey	17,0	21,5	50
İRPA6-19	İRPP-19	PA19	Black / Grey	19,0	24,0	50
İRPA6-22	İRPP-22	PA22	Black / Grey	22,0	27,5	50
İRPA6-23	İRPP-23	PA23	Black / Grey	23,0	28,7	50
İRPA6-26	İRPP-26	PA26	Black / Grey	26,0	31,0	25
İRPA6-29	İRPP-29	PA29	Black / Grey	29,0	34,5	25
İRPA6-36	İRPP-36	PA36	Black / Grey	36,0	42,5	25
İRPA6-48	İRPP-48	PA48	Black / Grey	48,0	54,5	25




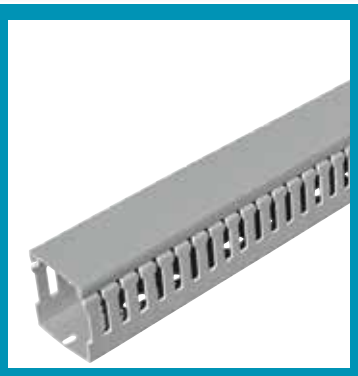




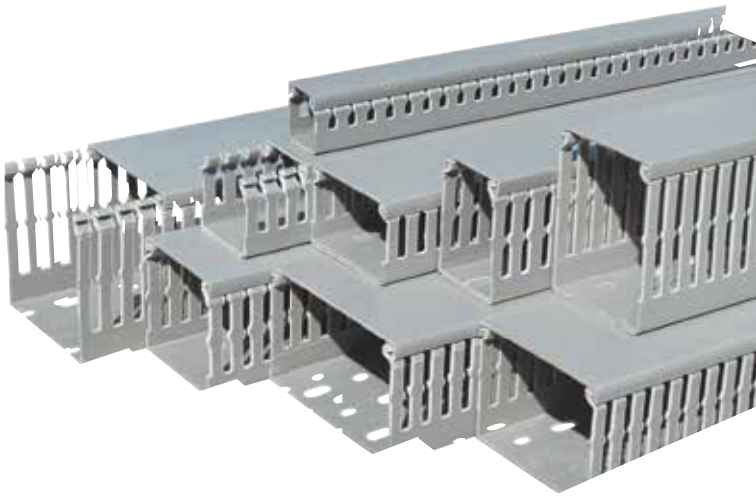







CABLE TRUNKING

Technical Features ;

- *High impact resistant rigid PVC material*
- *UL94V0 incombustibility standard*
- *Easy closing cover system*
- *Frangibility by the truncated sidecutters*
- *2 meters standard length*
- *390 kg/cm tensile strength*


Range of Products;


- *Slotted cable trunking*
- *Self adhesive slotted cable trunking*
- *Slotted cable trunking cover*
- *Plaster cable trunking*
- *Cable trunking cutter*

CABLE TRUNKING

HALOGEN FREE AVAILABLE

SLOTTED CABLE TRUNKING

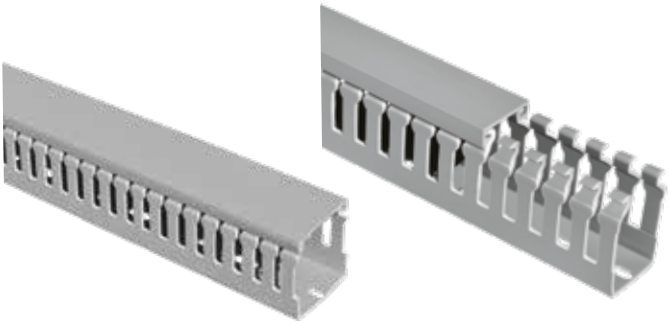




MATERIAL	
Material	PVC
Resistance of Dielectric	260 kW / cm
Working Temperature	(-15 ºC, +70 ºC)
Resistance of Tension	30 N / mm^2
Colour	RAL 7030 Grey
Dimensionally Temp. Resistance	Up to 65ºC

DESCIRIPTIONS						
CODE	CODE (HALOGEN FREE)	A x B (mm)	C (mm)	D (mm)	E (mm)	Meter
ONKA-7180	ONKA- 7310	25 x 30	2	5	6	84
ONKA- 7181	ONKA- 7311	25 x 40	2	5	6	84
ONKA- 7182	ONKA- 7312	25 x 60	2	5	6	48
ONKA- 7183	ONKA- 7313	40 x 40	2	5	6	60
ONKA- 7184	ONKA- 7314	40 x 60	2	5	6	36
ONKA- 7186	ONKA- 7315	40 x 80	2	5	6	40
ONKA- 7177	ONKA- 7316	60 x 40	2	5	6	40
ONKA- 7185	ONKA- 7317	60 x 60	2	5	6	24
ONKA- 7188	ONKA- 7318	60 x 80	2	5	6	24
ONKA- 7187	ONKA- 7319	80 x 60	2	5	6	24
ONKA- 7178	ONKA- 7320	80 x 80	2	5	6	24
ONKA- 7179	ONKA- 7321	100 x 60	2	5	6	24

SELF ADHESIVE SLOTTED CABLE TRUNKING

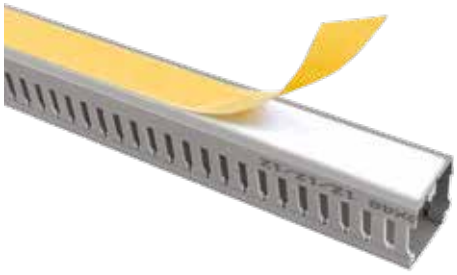



MATERIAL	
Material	PVC
Resistance of Dielectric	260 kW / cm
Working Temperature	(-15 ºC, +70 ºC)
Resistance of Tension	30 N / mm^2
Colour	RAL 7030 Grey
Dimensionally Temp. Resistance	Up to 65ºC

DESCIRIPTIONS						
CODE	CODE (HALOGEN FREE)	A x B (mm)	C (mm)	D (mm)	E (mm)	Meter
ONKA- 7220	ONKA- 7380	25 x 30	2	5	6	84
ONKA- 7221	ONKA- 7381	25 x 40	2	5	6	84
ONKA- 7222	ONKA- 7382	25 x 60	2	5	6	48
ONKA- 7223	ONKA- 7383	40 x 40	2	5	6	60
ONKA- 7224	ONKA- 7384	40 x 60	2	5	6	36
ONKA- 7225	ONKA- 7385	40 x 80	2	5	6	40
ONKA- 7226	ONKA- 7386	60 x 40	2	5	6	40
ONKA- 7227	ONKA- 7387	60 x 60	2	5	6	24
ONKA- 7228	ONKA- 7388	60 x 80	2	5	6	24
ONKA- 7229	ONKA- 7389	80 x 60	2	5	6	24
ONKA- 7230	ONKA- 7390	80 x 80	2	5	6	24
ONKA- 7231	ONKA- 7391	100 x 60	2	5	6	24

SLOTTED CABLE TRUNKING COVER



MATERIAL	
Material	PVC
Resistance of Dielectric	260 kW / cm
Working Temperature	(-15 ºC, +70 ºC)
Resistance of Tension	30 N / mm^2
Colour	RAL 7030 Grey
Dimensionally Temp. Resistance	Up to 65ºC

DESCIRIPTIONS			
CODE	**CODE (HALOGEN FREE)**	**Width (mm)**	**Meter**
7290	7295	25 mm	140
7291	7296	40 mm	80
7292	7297	60 mm	50
7293	7298	80 mm	50
7294	7299	100 mm	40

SLOTTED CABLE TRUNKING COVER



CODE	DESCRIPTIONS	BOX
PKM-125	Cable Trunking Cutter, Max 125 mm	1










DISTRIBUTION UNITS

Technical Features ;

The most important point about distrubition units is, the Screw holes on transparent covers. These holes allow the user to mount the screws without removing it. This provides and important mounting convenience


Range of Products;


- *Singlepole distributions units 80A - 160A - 250A*
- *2 Poles distributions units 80A - 160A - 250A*
- *3 Poles distributions units 80A - 160A - 250A*
- *4 Poles distributions units 80A - 160A - 250A*
- *Slotted grounded panel terminal connectors 80A - 160A - 250A*
- *5 Pole distribution unit & accessories*
- *Monoblock distributions units*
- *Neutral grounded busbar*
- *Neutral & Earth distribution blocks (full insulated)*

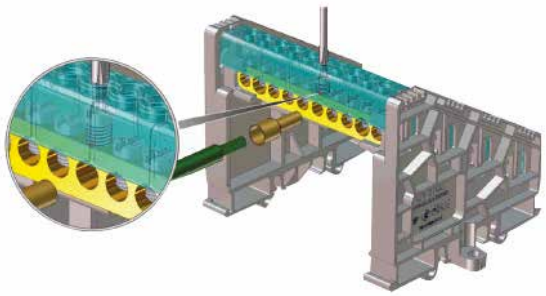

DISTRIBUTION UNITS

SINGLE POLE DISTRIBUTION UNITS 6.5 x 9 mm² - WITHOUT COVER

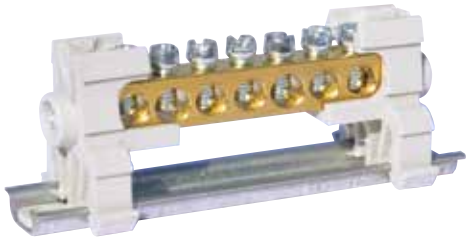

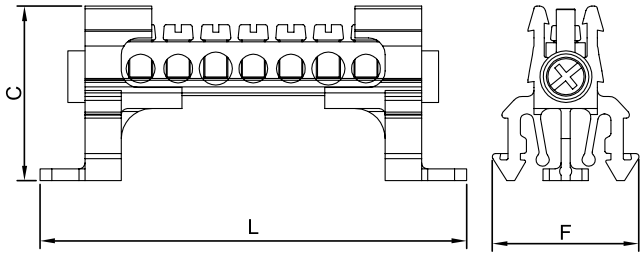

*** U_{imp} :** Impact strength voltage

NEW CODE	OLD CODE	DESCRIPTIONS	Current (A)	Voltage (V)	U_{imp} (V)	L±2 (mm)	F±1 (mm)	C±1 (mm)	Pcs.
1080001	2051	2 / 5 - 7 Holes	80	400	4000	71,4	24	28,2	32
1080002	2052	2 / 8 - 10 Holes	80	400	4000	89,9	24	28,2	24
1080003	2053	2 / 10 - 12 Holes	80	400	4000	102,4	24	28,2	18
1080004	2054	2 / 13 - 15 Holes	80	400	4000	120,9	24	28,2	16
1080005	2055	2 / 20 - 22 Holes	80	400	4000	164,9	24	28,2	12


MATERIAL	
Foot (2 Pcs.)	PA
Square Screw (2 Pcs.)	Steel
Earth (1 Pcs.)	Brass
Torque Screw (7-22 Pcs.)	Steel

MAX. CABLE SECTION			
INCOMING		OUTGOING	
With Terminal	Without Terminal	With Terminal	Without Terminal
10	16	6	10

**Multi Core Cables should be used with a Cord End Terminal*

SINGLE POLE DISTRIBUTION UNITS 6.5 x 9 mm² - WITH COVER



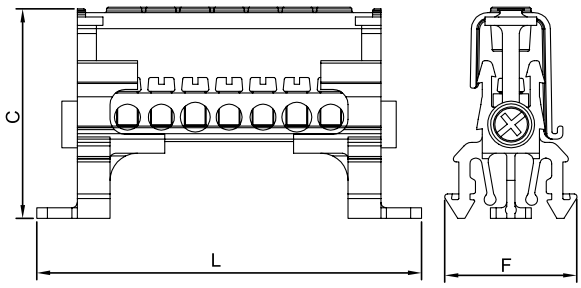

*** U_{imp} :** Impact strength voltage

NEW CODE	OLD CODE	DESCRIPTIONS	Current (A)	Voltage (V)	U_{imp} (V)	L±2 (mm)	F±1 (mm)	C±1 (mm)	Pcs.
1080011	2061	2 / 5 - 7 Holes	80	400	4000	71,4	24	37,5	32
1080012	2062	2 / 8 - 10 Holes	80	400	4000	89,9	24	37,5	24
1080013	2063	2 / 10 - 12 Holes	80	400	4000	102,4	24	37,5	18
1080014	2064	2 / 13 - 15 Holes	80	400	4000	120,9	24	37,5	16
1080015	2065	2 / 20 - 22 Holes	80	400	4000	164,9	24	37,5	12


MATERIAL	
Foot (2 Pcs.)	PA
Square Screw (2 Pcs.)	Steel
Earth (1 Pcs.)	Brass
Torque Screw (7-22 Pcs.)	Steel

MAX. CABLE SECTION			
INCOMING		OUTGOING	
With Terminal	Without Terminal	With Terminal	Without Terminal
10	16	6	10

**Multi Core Cables should be used with a Cord End Terminal*

SINGLE POLE DISTRIBUTION UNITS 7 x 12 mm² - WITHOUT COVER



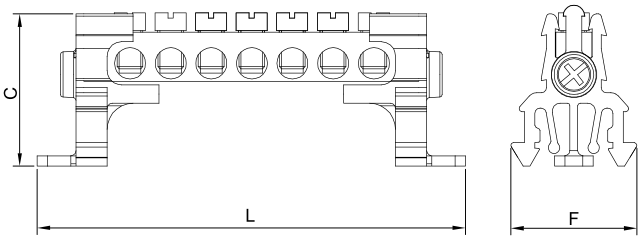

* U_{imp} : Impact strength voltage

NEW CODE	OLD CODE	DESCRIPTIONS	Current (A)	Voltage (V)	U_{imp} (V)	L±2 (mm)	F±1 (mm)	C±1 (mm)	Pcs.
1080006	2056	2 / 5 - 7 Holes	160	750	4000	83	24	28,2	32
1080007	2057	2 / 8 - 10 Holes	160	750	4000	106,7	24	28,2	24
1080008	2058	2 / 10 - 12 Holes	160	750	4000	122,5	24	28,2	18
1080009	2059	2 / 13 - 15 Holes	160	750	4000	146,1	24	28,2	16
1080010	2060	2 / 20 - 22 Holes	160	750	4000	200,9	24	28,2	12


MATERIAL	
Foot (2 Pcs.)	PA
Square Screw (2 Pcs.)	Steel
Earth (1 Pcs.)	Brass
Torque Screw (7-22 Pcs.)	Steel

MAX. CABLE SECTION			
INCOMING		OUTGOING	
With Terminal	Without Terminal	With Terminal	Without Terminal
16	25	10	16

**Multi Core Cables should be used with a Cord End Terminal*

SINGLE POLE DISTRIBUTION UNITS 7 x 12 mm² - WITH COVER



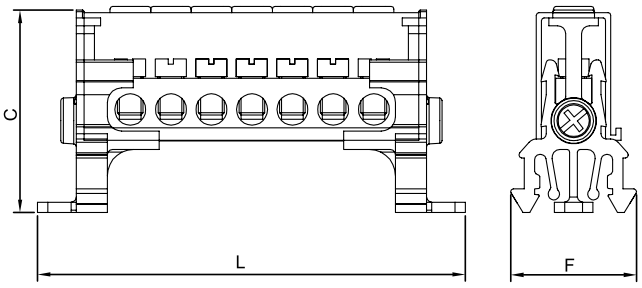

* U_{imp} : Impact strength voltage


NEW CODE	OLD CODE	DESCRIPTIONS	Current (A)	Voltage (V)	U_{imp} (V)	L±2 (mm)	F±1 (mm)	C±1 (mm)	Pcs.
1080021	2071	2 / 5 - 7 Holes	160	750	4000	83	24	37,5	32
1080022	2072	2 / 8 - 10 Holes	160	750	4000	106,7	24	37,5	24
1080023	2073	2 / 10 - 12 Holes	160	750	4000	122,5	24	37,5	18
1080024	2074	2 / 13 - 15 Holes	160	750	4000	146,1	24	37,5	16
1080025	2075	2 / 20 - 22 Holes	160	750	4000	200,9	24	37,5	12


MATERIAL	
Foot (2 Pcs.)	PA
Square Screw (2 Pcs.)	Steel
Earth (1 Pcs.)	Brass
Torque Screw (7-22 Pcs.)	Steel

MAX. CABLE SECTION			
INCOMING		OUTGOING	
With Terminal	Without Terminal	With Terminal	Without Terminal
16	25	10	16

**Multi Core Cables should be used with a Cord End Terminal*

SINGLE POLE DISTRIBUTION UNITS 10 x 15 mm² - WITHOUT COVER

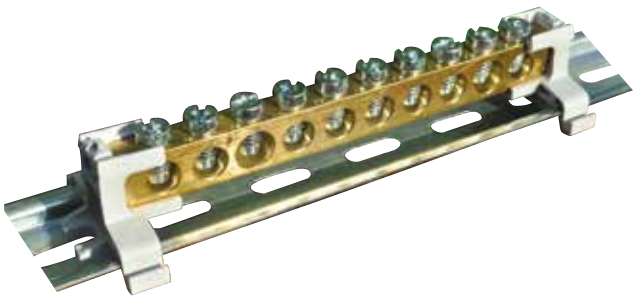

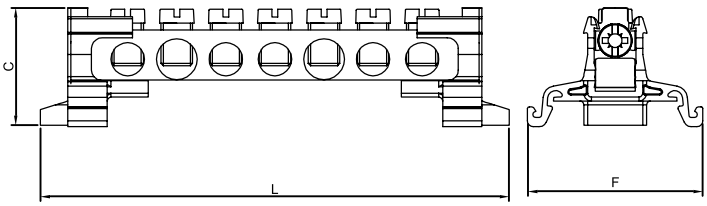

MATERIAL	
Foot (2 Pcs.)	PA
Square Screw (2 Pcs.)	Steel
Earth (1 Pcs.)	Brass
Torque Screw (7-22 Pcs.)	Steel

MAX. CABLE SECTION			
INCOMING		OUTGOING	
With Terminal	Without Terminal	With Terminal	Without Terminal
35	50	25	35


*Multi Core Cables should be used with a Cord End Terminal

* **U_{imp} :** Impact strength voltage

NEW CODE	OLD CODE	DESCRIPTIONS	Current (A)	Voltage (V)	U_{imp} (V)	L±2 (mm)	F±1 (mm)	C±1 (mm)	Pcs.
1080016	2066	2 / 5 - 7 Holes	250	750	4000	121	43,2	32	32
1080017	2067	2 / 8 - 10 Holes	250	750	4000	159	43,2	32	24
1080018	2068	2 / 10 - 12 Holes	250	750	4000	184	43,2	32	18
1080019	2069	2 / 13 - 15 Holes	250	750	4000	220,5	43,2	32	16
1080020	2070	2 / 20 - 22 Holes	250	750	4000	308	43,2	32	12

SINGLE POLE DISTRIBUTION UNITS 10 x 15 mm² - WITH COVER



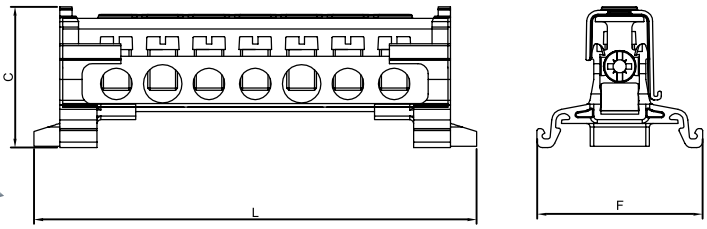

MATERIAL	
Foot (2 Pcs.)	PA
Square Screw (2 Pcs.)	Steel
Earth (1 Pcs.)	Brass
Torque Screw (7-22 Pcs.)	Steel

MAX. CABLE SECTION			
INCOMING		OUTGOING	
With Terminal	Without Terminal	With Terminal	Without Terminal
35	50	25	35


*Multi Core Cables should be used with a Cord End Terminal

* **U_{imp} :** Impact strength voltage

NEW CODE	OLD CODE	DESCRIPTIONS	Current (A)	Voltage (V)	U_{imp} (V)	L±2 (mm)	F±1 (mm)	C±1 (mm)	Pcs.
1080026	2076	2 / 5 - 7 Holes	250	750	4000	121	43,2	38	32
1080027	2077	2 / 8 - 10 Holes	250	750	4000	159	43,2	38	24
1080028	2078	2 / 10 - 12 Holes	250	750	4000	184	43,2	38	18
1080029	2079	2 / 13 - 15 Holes	250	750	4000	220,5	43,2	38	16
1080030	2080	2 / 20 - 22 Holes	250	750	4000	308	43,2	38	12

TWO POLES DISTRIBUTION UNITS 6,5 x 9 mm² - WITH COVER



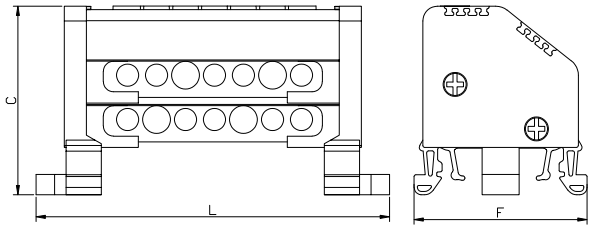

MARKING	
See Pg. 173-179	9540 / 9770 / 5443 / 4440 4442 / 4390

MATERIAL	
Foot (2 Pcs.)	PA
Square Screw (4 Pcs.)	Steel
Screw (14 - 44 Pcs.)	Steel
Earth (2 Pcs.)	Brass
Cover (2 Pcs.)	Polycarbonat


MAX. CABLE SECTION			
INCOMING		OUTGOING	
With Terminal	Without Terminal	With Terminal	Without Terminal
10	16	6	10


Multi Core Cables should be used with a Cord End Terminal

* U_{imp} : Impact strength voltage

NEW CODE	OLD CODE	DESCRIPTIONS	Current (A)	Voltage (V)	U_{imp} (V)	L±2 (mm)	F±1 (mm)	C±1 (mm)	Pcs.
1080031	2081	2 / 5 - 7 Holes	80	400	4000	82,7	50,8	46,6	1
1080032	2082	2 / 8 - 10 Holes	80	400	4000	101,7	50,8	46,6	1
1080033	2083	2 / 10 - 12 Holes	80	400	4000	114,2	50,8	46,6	1
1080034	2084	2 / 13 - 15 Holes	80	400	4000	132,7	50,8	46,6	1
1080035	2085	2 / 20 - 22 Holes	80	400	4000	176,5	50,8	46,6	1

TWO POLES DISTRIBUTION UNITS 7 x 12 mm2 - WITH COVER

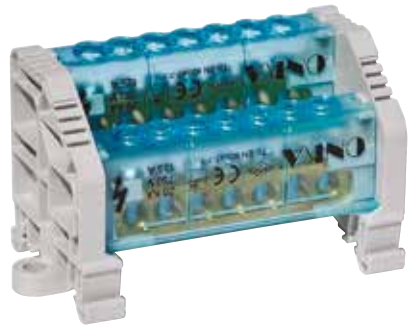

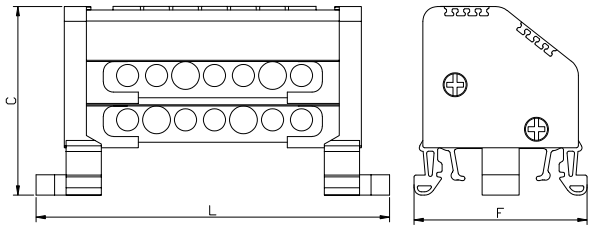

MARKING	
See Pg. 173-179	9540 / 9770 / 5443 / 4440 4442 / 4390

MATERIAL	
Foot (2 Pcs.)	PA
Square Screw (4 Pcs.)	Steel
Screw (14 - 44 Pcs.)	Steel
Earth (2 Pcs.)	Brass
Cover (2 Pcs.)	Polycarbonat

MAX. CABLE SECTION			
INCOMING		OUTGOING	
With Terminal	Without Terminal	With Terminal	Without Terminal
16	25	10	16


Multi Core Cables should be used with a Cord End Terminal

* U_{imp} : Impact strength voltage

NEW CODE	OLD CODE	DESCRIPTIONS	Current (A)	Voltage (V)	U_{imp} (V)	L±2 (mm)	F±1 (mm)	C±1 (mm)	Pcs.
1080041	2091	2 / 5 - 7 Holes	160	750	4000	95,2	50,8	46,6	1
1080042	2092	2 / 8 - 10 Holes	160	750	4000	118,7	50,8	46,6	1
1080043	2093	2 / 10 - 12 Holes	160	750	4000	134,2	50,8	46,6	1
1080044	2094	2 / 13 - 15 Holes	160	750	4000	157,2	50,8	46,6	1
1080045	2095	2 / 20 - 22 Holes	160	750	4000	212,2	50,8	46,6	1

TWO POLES DISTRIBUTION UNITS 10 x 15 mm² - WITH COVER



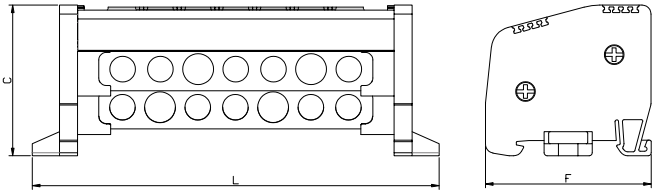

* U_{imp} : Impact strength voltage

MARKING	
See Pg. 173-179	9540 / 9770 / 5443 / 4440 4442 / 4390

NEW CODE	OLD CODE	DESCRIPTIONS	Current (A)	Voltage (V)	U_{imp} (V)	L±2 (mm)	F±1 (mm)	C±1 (mm)	Pcs.
1080036	2086	2 / 5 - 7 Holes	250	750	4000	135	55	50	1
1080037	2087	2 / 8 - 10 Holes	250	750	4000	172,5	55	50	1
1080038	2088	2 / 10 - 12 Holes	250	750	4000	197	55	50	1
1080039	2089	2 / 13 - 15 Holes	250	750	4000	235	55	50	1
1080040	2090	2 / 20 - 22 Holes	250	750	4000	322,5	55	50	1


MATERIAL	
Foot (2 Pcs.)	PA
Square Screw (4 Pcs.)	Steel
Screw (14 - 44 Pcs.)	Steel
Earth (2 Pcs.)	Brass
Cover (2 Pcs.)	Polycarbonat

MAX. CABLE SECTION			
INCOMING		OUTGOING	
With Terminal	Without Terminal	With Terminal	Without Terminal
35	50	25	35

Multi Core Cables should be used with a Cord End Terminal

THREE POLES DISTRIBUTION UNITS 6,5 x 9 mm² - WITH COVER (LOW TYPE)



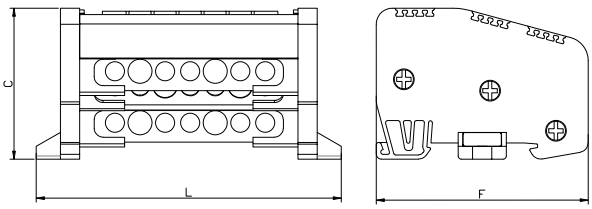

* In order to ensure complete insulation for the declared impact strength, the base insulation part must be used which provided with the product

* U_{imp} : Impact strength voltage

MARKING	
See Pg. 173-179	9540 / 9770 / 5443 / 4440 4442 / 4390

NEW CODE	OLD CODE	DESCRIPTIONS	Current (A)	Voltage (V)	U_{imp} (V)	L±2 (mm)	F±1 (mm)	C±1 (mm)	Pcs.
1080066	2171	2 / 5 - 7 Holes	80	400	4000	82,7	66	47	1
1080067	2172	2 / 8 - 10 Holes	80	400	4000	101,6	66	47	1
1080068	2173	2 / 10 - 12 Holes	80	400	4000	113,9	66	47	1
1080069	2174	2 / 13 - 15 Holes	80	400	4000	132,8	66	47	1
1080070	2175	2 / 20 - 22 Holes	80	400	4000	176,5	66	47	1

MATERIAL	
Foot (2 Pcs.)	PA
Square Screw (6 Pcs.)	Steel
Screw (21 - 66 Pcs.)	Steel
Earth (3 Pcs.)	Brass
Cover (3 Pcs.)	Polycarbonat


ACCESSORY		
Distribution Unit Isolation Apparatus	NEW CODE	OLD CODE
	1080136	2137

MAX. CABLE SECTION			
INCOMING		OUTGOING	
With Terminal	Without Terminal	With Terminal	Without Terminal
10	16	6	10

Multi Core Cables should be used with a Cord End Terminal

THREE POLES DISTRIBUTION UNITS 7 x 12 mm² - WITH COVER (LOW TYPE)



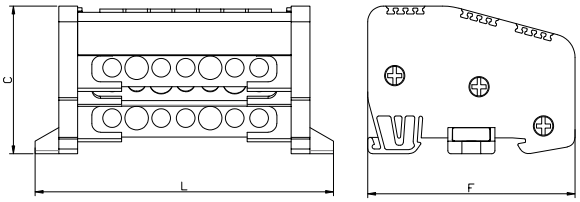

* In order to ensure complete insulation for the declared impact strength, the base insulation part must be used which provided with the product

* **U_{imp} :** Impact strength voltage

MARKING	
See Pg. 173-179	9540 / 9770 / 5443 / 4440 4442 / 4390

MATERIAL	
Foot (2 Pcs.)	PA
Square Screw (6 Pcs.)	Steel
Screw (21 - 66 Pcs.)	Steel
Earth (3 Pcs.)	Brass
Cover (3 Pcs.)	Polycarbonat


ACCESSORY		
Distribution Unit Isolation Apparatus	NEW CODE	OLD CODE
	1080136	2137


NEW CODE	OLD CODE	DESCRIPTIONS	Current (A)	Voltage (V)	U_{imp} (V)	L±2 (mm)	F±1 (mm)	C±1 (mm)	Pcs.
1080061	2151	2 / 5 - 7 Holes	160	750	4000	95	66	47	1
1080062	2152	2 / 8 - 10 Holes	160	750	4000	118,5	66	47	1
1080063	2153	2 / 10 - 12 Holes	160	750	4000	134	66	47	1
1080064	2154	2 / 13 - 15 Holes	160	750	4000	157	66	47	1
1080065	2155	2 / 20 - 22 Holes	160	750	4000	212	66	47	1

MAX. CABLE SECTION			
INCOMING		OUTGOING	
With Terminal	Without Terminal	With Terminal	Without Terminal
10	25	10	16

**Multi Core Cables should be used with a Cord End Terminal*

THREE POLES DISTRIBUTION UNITS 10 x 15 mm² - WITH COVER (LOW TYPE)

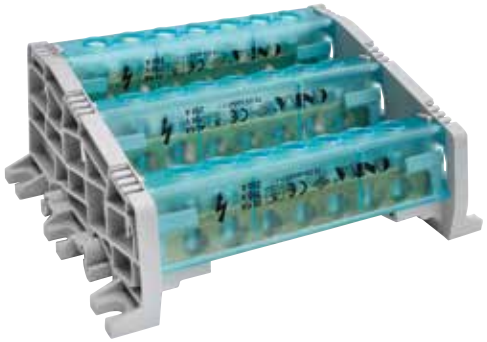

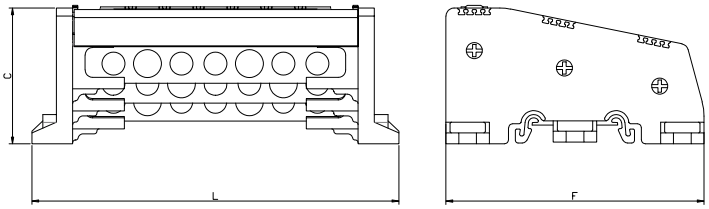

* **U_{imp} :** Impact strength voltage

MARKING	
See Pg. 173-179	9540 / 9770 / 5443 / 4440 4442 / 4390


MATERIAL	
Foot (2 Pcs.)	PA
Square Screw (6 Pcs.)	Steel
Screw (21 - 66 Pcs.)	Steel
Earth (3 Pcs.)	Brass
Cover (3 Pcs.)	Polycarbonat


NEW CODE	OLD CODE	DESCRIPTIONS	Current (A)	Voltage (V)	U_{imp} (V)	L±2 (mm)	F±1 (mm)	C±1 (mm)	Pcs.
1080071	2181	2 / 5 - 7 Holes	250	750	4000	135	95	50	1
1080072	2182	2 / 8 - 10 Holes	250	750	4000	172,5	95	50	1
1080073	2183	2 / 10 - 12 Holes	250	750	4000	197	95	50	1
1080074	2184	2 / 13 - 15 Holes	250	750	4000	235	95	50	1
1080075	2185	2 / 20 - 22 Holes	250	750	4000	322,5	95	50	1

MAX. CABLE SECTION			
INCOMING		OUTGOING	
With Terminal	Without Terminal	With Terminal	Without Terminal
35	50	25	35

**Multi Core Cables should be used with a Cord End Terminal*

THREE POLES DISTRIBUTION UNITS 10 x 15 mm² - WITH COVER (HIGH TYPE)

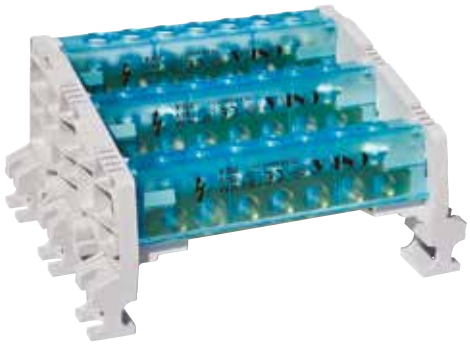

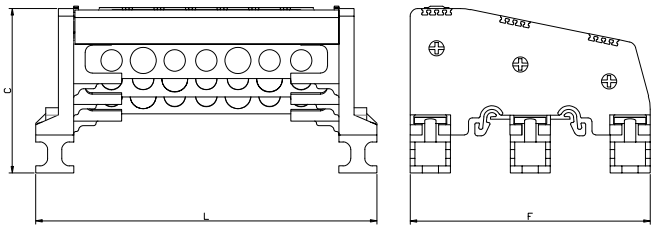

MARKING	
See Pg. 173-179	9540 / 9770 / 5443 / 4440 4442 / 4390

MATERIAL	
Foot (2 Pcs.)	PA
Square Screw (6 Pcs.)	Steel
Screw (21 - 66 Pcs.)	Steel
Earth (3 Pcs.)	Brass
Cover (3 Pcs.)	Polycarbonat


* **U_{imp} :** Impact strength voltage


NEW CODE	OLD CODE	DESCRIPTIONS	Current (A)	Voltage (V)	U_{imp} (V)	L±2 (mm)	F±1 (mm)	C±1 (mm)	Pcs.
1080076	2186	2 / 5 - 7 Holes	250	750	4000	135	95	65	1
1080077	2187	2 / 8 - 10 Holes	250	750	4000	172,5	95	65	1
1080078	2188	2 / 10 - 12 Holes	250	750	4000	197	95	65	1
1080079	2189	2 / 13 - 15 Holes	250	750	4000	235	95	65	1
1080080	2190	2 / 20 - 22 Holes	250	750	4000	322,5	95	65	1

MAX. CABLE SECTION			
INCOMING		OUTGOING	
With Terminal	Without Terminal	With Terminal	Without Terminal
35	50	25	35

**Multi Core Cables should be used with a Cord End Terminal*

FOUR POLES DISTRIBUTION UNITS 6,5 x 9 mm² - WITH COVER (LOW TYPE)

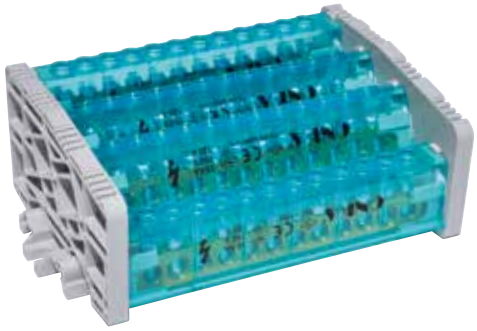

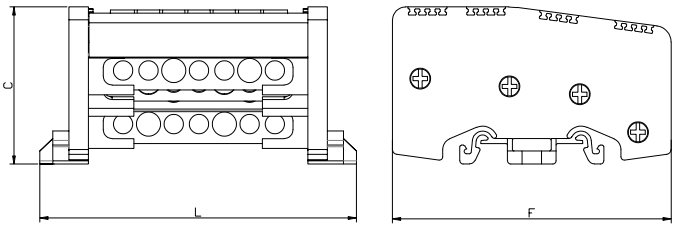

MARKING	
See Pg. 173-179	9540 / 9770 / 5443 / 4440 4442 / 4390

MATERIAL	
Foot (2 Pcs.)	PA
Square Screw (8 Pcs.)	Steel
Screw (28 - 88 Pcs.)	Steel
Earth (4 Pcs.)	Brass
Cover (4 Pcs.)	Polycarbonat


* **U_{imp} :** Impact strength voltage


NEW CODE	OLD CODE	DESCRIPTIONS	Current (A)	Voltage (V)	U_{imp} (V)	L±2 (mm)	F±1 (mm)	C±1 (mm)	Pcs.
1080086	2201	2 / 5 - 7 Holes	80	400	4000	85,8	86	48,5	1
1080087	2202	2 / 8 - 10 Holes	80	400	4000	104,7	86	48,5	1
1080088	2203	2 / 10 - 12 Holes	80	400	4000	117	86	48,5	1
1080089	2204	2 / 13 - 15 Holes	80	400	4000	135,9	86	48,5	1
1080090	2205	2 / 20 - 22 Holes	80	400	4000	179,6	86	48,5	1

MAX. CABLE SECTION			
INCOMING		OUTGOING	
With Terminal	Without Terminal	With Terminal	Without Terminal
10	16	6	10

**Multi Core Cables should be used with a Cord End Terminal*

FOUR POLES DISTRIBUTION UNITS 7 x 12 mm² - WITH COVER (LOW TYPE)

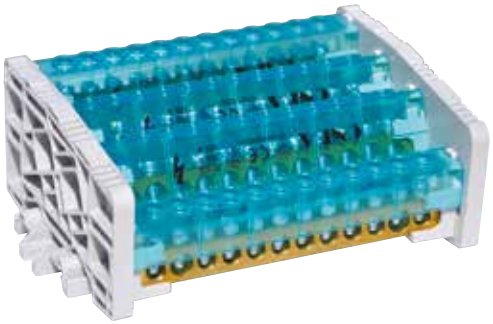

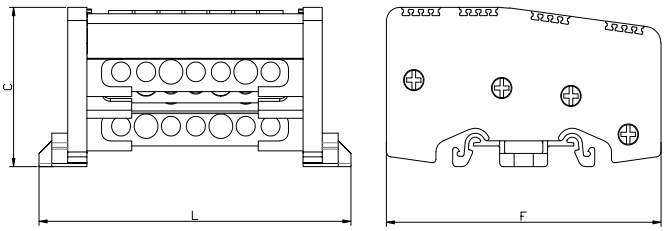

MARKING	
See Pg. 173-179	9540 / 9770 / 5443 / 4440 4442 / 4390

MATERIAL	
Foot (2 Pcs.)	PA
Square Screw (8 Pcs.)	Steel
Screw (28 - 88 Pcs.)	Steel
Earth (4 Pcs.)	Brass
Cover (4 Pcs.)	Polycarbonat


* U_{imp} : Impact strength voltage


NEW CODE	OLD CODE	DESCRIPTIONS	Current (A)	Voltage (V)	U_{imp} (V)	L±2 (mm)	F±1 (mm)	C±1 (mm)	Pcs.
1080091	2211	2 / 5 - 7 Holes	160	750	4000	97,7	86	48,5	1
1080092	2212	2 / 8 - 10 Holes	160	750	4000	121,2	86	48,5	1
1080093	2213	2 / 10 - 12 Holes	160	750	4000	136,7	86	48,5	1
1080094	2214	2 / 13 - 15 Holes	160	750	4000	159,7	86	48,5	1
1080095	2215	2 / 20 - 22 Holes	160	750	4000	214,7	86	48,5	1

MAX. CABLE SECTION			
INCOMING		OUTGOING	
With Terminal	Without Terminal	With Terminal	Without Terminal
16	25	10	16

**Multi Core Cables should be used with a Cord End Terminal*

FOUR POLES DISTRIBUTION UNITS 10 x 15 mm² - WITH COVER (LOW TYPE)

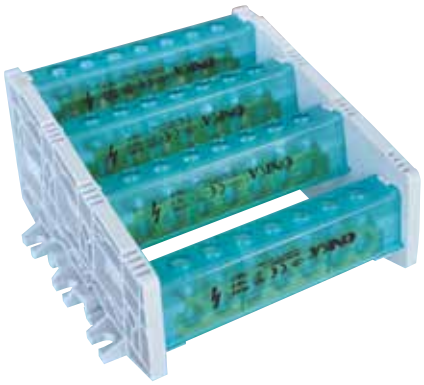

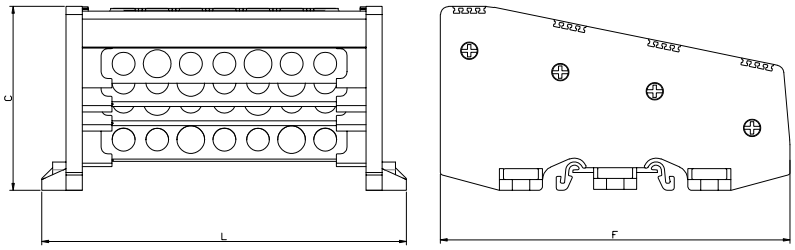

MARKING	
See Pg. 173-179	9540 / 9770 / 5443 / 4440 4442 / 4390

MATERIAL	
Foot (2 Pcs.)	PA
Square Screw (8 Pcs.)	Steel
Screw (21 - 66 Pcs.)	Steel
Earth (4 Pcs.)	Brass
Cover (4 Pcs.)	Polycarbonat

* U_{imp} : Impact strength voltage


NEW CODE	OLD CODE	DESCRIPTIONS	Current (A)	Voltage (V)	U_{imp} (V)	L±2 (mm)	F±1 (mm)	C±1 (mm)	Pcs.
1080056	2116	2 / 5 - 7 Holes	250	750	4000	135,5	130	68	1
1080057	2117	2 / 8 - 10 Holes	250	750	4000	172,6	130	68	1
1080058	2118	2 / 10 - 12 Holes	250	750	4000	197	130	68	1
1080059	2119	2 / 13 - 15 Holes	250	750	4000	235	130	68	1
1080060	2120	2 / 20 - 22 Holes	250	750	4000	322,5	130	68	1

MAX. CABLE SECTION			
INCOMING		OUTGOING	
With Terminal	Without Terminal	With Terminal	Without Terminal
35	50	25	35

**Multi Core Cables should be used with a Cord End Terminal*

FOUR POLES DISTRIBUTION UNITS 6,5 x 9 mm² - WITH COVER (HIGH TYPE)



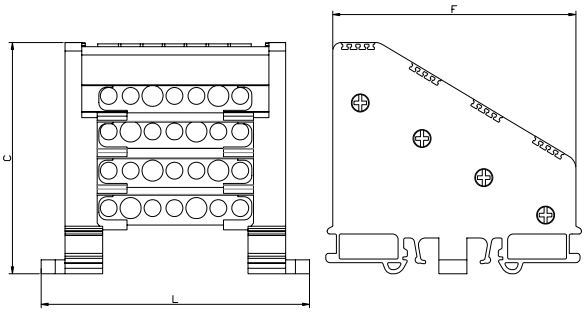

* U_{imp} : Impact strength voltage

MARKING	
See Pg. 173-179	9540 / 9770 / 5443 / 4440 4442 / 4390


MATERIAL	
Foot (2 Pcs.)	PA
Square Screw (8 Pcs.)	Steel
Screw (28 - 88 Pcs.)	Steel
Earth (4 Pcs.)	Brass
Cover (4 Pcs.)	Polycarbonat


NEW CODE	OLD CODE	DESCRIPTIONS	Current (A)	Voltage (V)	U_{imp} (V)	L±2 (mm)	F±1 (mm)	C±1 (mm)	Pcs.
1080046	2101	2 / 5 - 7 Holes	80	400	4000	84,3	86,5	82,3	1
1080047	2102	2 / 8 - 10 Holes	80	400	4000	103,2	86,5	82,3	1
1080048	2103	2 / 10 - 12 Holes	80	400	4000	115,5	86,5	82,3	1
1080049	2104	2 / 13 - 15 Holes	80	400	4000	134,4	86,5	82,3	1
1080050	2105	2 / 20 - 22 Holes	80	400	4000	178,1	86,5	82,3	1

MAX. CABLE SECTION			
INCOMING		OUTGOING	
With Terminal	Without Terminal	With Terminal	Without Terminal
10	16	6	10

**Multi Core Cables should be used with a Cord End Terminal*

FOUR POLES DISTRIBUTION UNITS 7 x 12 mm² - WITH COVER (HIGH TYPE)

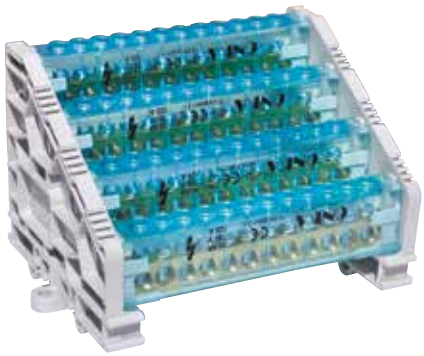

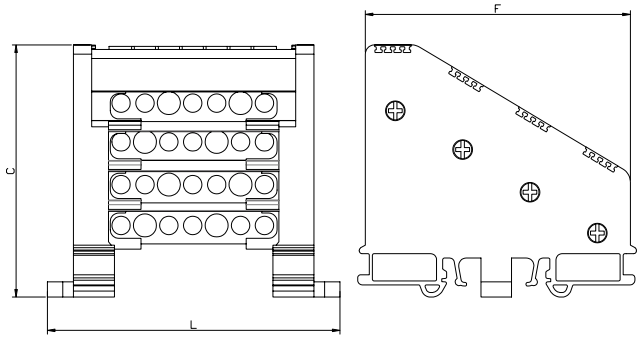

* U_{imp} : Impact strength voltage

MARKING	
See Pg. 173-179	9540 / 9770 / 5443 / 4440 4442 / 4390


MATERIAL	
Foot (2 Pcs.)	PA
Square Screw (8 Pcs.)	Steel
Screw (28 - 88 Pcs.)	Steel
Earth (4 Pcs.)	Brass
Cover (4 Pcs.)	Polycarbonat


NEW CODE	OLD CODE	DESCRIPTIONS	Current (A)	Voltage (V)	U_{imp} (V)	L±2 (mm)	F±1 (mm)	C±1 (mm)	Pcs.
1080051	2111	2 / 5 - 7 Holes	160	750	4000	95,5	86,5	82,3	1
1080052	2112	2 / 8 - 10 Holes	160	750	4000	119,5	86,5	82,3	1
1080053	2113	2 / 10 - 12 Holes	160	750	4000	135	86,5	82,3	1
1080054	2114	2 / 13 - 15 Holes	160	750	4000	158	86,5	82,3	1
1080055	2115	2 / 20 - 22 Holes	160	750	4000	213	86,5	82,3	1

MAX. CABLE SECTION			
INCOMING		OUTGOING	
With Terminal	Without Terminal	With Terminal	Without Terminal
10	25	10	16

**Multi Core Cables should be used with a Cord End Terminal*

FIVE POLES DISTRIBUTION UNITS 10 x 15 mm² - WITH COVER (LOW TYPE)

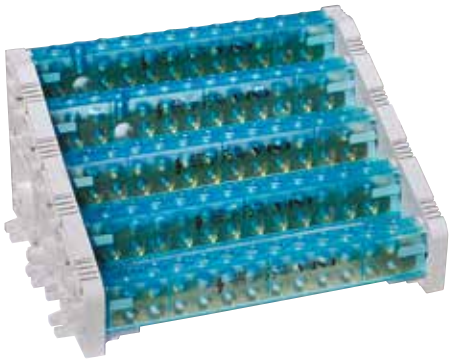

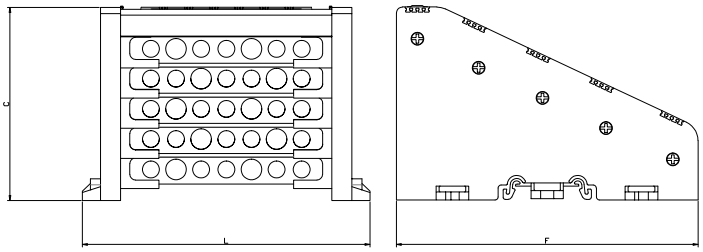

MARKING	
See Pg. 173-179	9540 / 9770 / 5443 / 4440 4442 / 4390 / 2630

MATERIAL	
Foot (2 Pcs.)	PA
Square Screw (10 Pcs.)	Steel
Screw (35 - 110 Pcs.)	Steel
Earth (5 Pcs.)	Brass
Cover (5 Pcs.)	Polycarbonat


* U_{imp} : Impact strength voltage


NEW CODE	OLD CODE	DESCRIPTIONS	Current (A)	Voltage (V)	U_{imp} (V)	L±2 (mm)	F±1 (mm)	C±1 (mm)	Pcs.
1080081	2191	2 / 5 - 7 Holes	250	750	4000	143	150	96	1
1080082	2192	2 / 8 - 10 Holes	250	750	4000	180,5	150	96	1
1080083	2193	2 / 10 - 12 Holes	250	750	4000	205	150	96	1
1080084	2194	2 / 13 - 15 Holes	250	750	4000	243	150	96	1
1080085	2195	2 / 20 - 22 Holes	250	750	4000	329	150	96	1

MAX. CABLE SECTION			
INCOMING		OUTGOING	
With Terminal	Without Terminal	With Terminal	Without Terminal
35	50	25	35

**Multi Core Cables should be used with a Cord End Terminal*

FIVE POLES DISTRIBUTION UNITS 10 x 15 mm² - WITH COVER (HIGH TYPE)

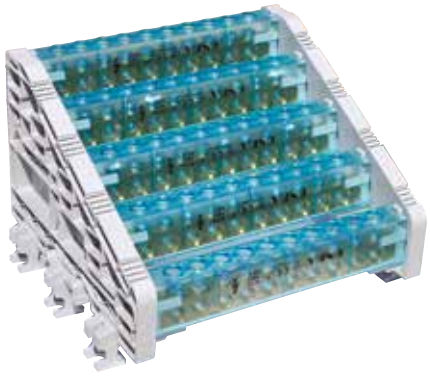

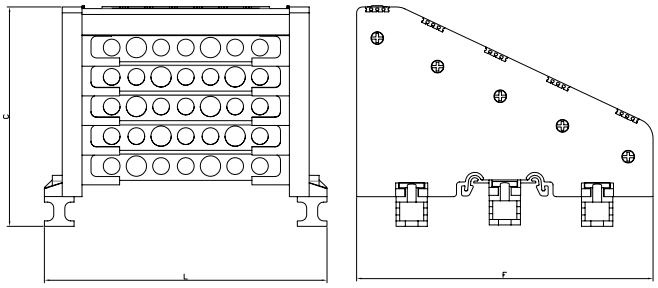

MARKING	
See Pg. 173-179	9540 / 9770 / 5443 / 4440 4442 / 4390 / 2630

MATERIAL	
Foot (2 Pcs.)	PA
Square Screw (10 Pcs.)	Steel
Screw (35 - 110 Pcs.)	Steel
Earth (5 Pcs.)	Brass
Cover (5 Pcs.)	Polycarbonat


* U_{imp} : Impact strength voltage


NEW CODE	OLD CODE	DESCRIPTIONS	Current (A)	Voltage (V)	U_{imp} (V)	L±2 (mm)	F±1 (mm)	C±1 (mm)	Pcs.
1080096	2216	2 / 5 - 7 Holes	250	750	4000	143	150	111	1
1080097	2217	2 / 8 - 10 Holes	250	750	4000	180,5	150	111	1
1080098	2218	2 / 10 - 12 Holes	250	750	4000	205	150	111	1
1080099	2219	2 / 13 - 15 Holes	250	750	4000	243	150	111	1
1080100	2220	2 / 20 - 22 Holes	250	750	4000	329	150	111	1

MAX. CABLE SECTION			
INCOMING		OUTGOING	
With Terminal	Without Terminal	With Terminal	Without Terminal
35	50	25	35

**Multi Core Cables should be used with a Cord End Terminal*

SLOTTED GROUNDED PANEL TERMINAL CONNECTORS 80 A (6.5 x 9 mm²)

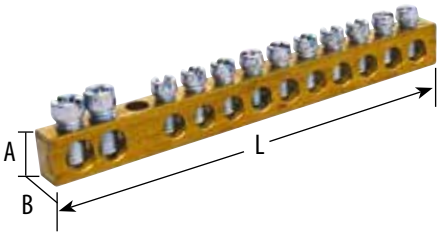

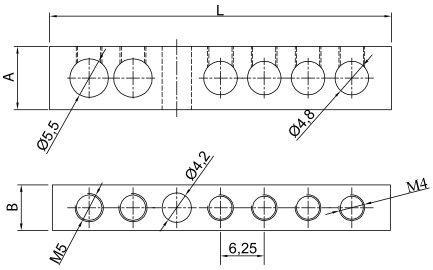



NEW CODE	OLD CODE	DESCRIPTIONS	A	B	L±2	Pcs. Box
1080101	2001	2/3 = 5 Holes	9	6,5	42	50
1080102	2002	2/5 = 7 Holes	9	6,5	54	50
1080103	2003	2/8 = 10 Holes	9	6,5	73	50
1080104	2004	2/10 = 12 Holes	9	6,5	86	50
1080105	2005	2/13 = 15 Holes	9	6,5	105	50
1080106	2006	2/20 = 22 Holes	9	6,5	148	50
1080107	2007	2/40 = 42 Holes	9	6,5	285	50
1080108	2008	2/60 = 62 Holes	9	6,5	410	50
1080109	2009	2/80 = 82 Holes	9	6,5	535	50
1080110	1999	1 meter 159 Holes	9	6,5	1000	50

MAX. CABLE SECTION			
INCOMING		OUTGOING	
With Terminal	Without Terminal	With Terminal	Without Terminal
10	16	6	10

**Multi Core Cables should be used with a Cord End Terminal*

SLOTTED GROUNDED PANEL TERMINAL CONNECTORS 160 A (7 x 12 mm²)

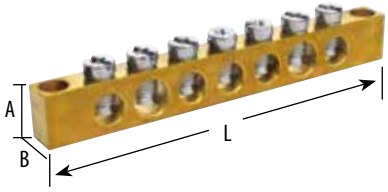

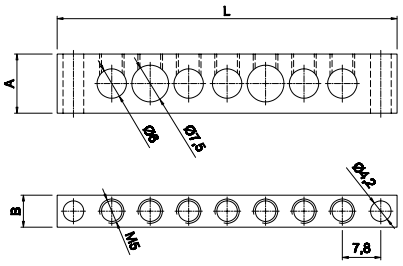



NEW CODE	OLD CODE	DESCRIPTIONS	A	B	L±2	Pcs. Box
1080115	2021	2/5 = 7 Holes	12	6,5	69	50
1080116	2022	2/8 = 10 Holes	12	6,5	93	50
1080117	2023	2/10 = 12 Holes	12	6,5	108	50
1080118	2024	2/13 = 15 Holes	12	6,5	133	50
1080119	2025	2/20 = 22 Holes	12	6,5	188	50
1080121	2029	1 meter 126 Holes	12	6,5	1000	50

MAX. CABLE SECTION			
INCOMING		OUTGOING	
With Terminal	Without Terminal	With Terminal	Without Terminal
16	25	10	16

**Multi Core Cables should be used with a Cord End Terminal*

SLOTTED GROUNDED PANEL TERMINAL CONNECTORS 250 A (10 x 15 mm²)

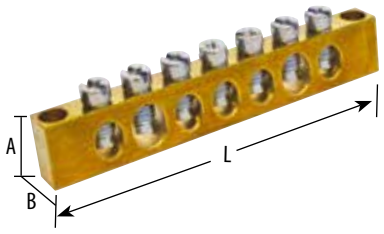

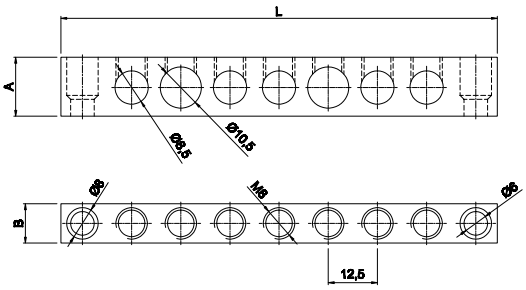


NEW CODE	OLD CODE	DESCRIPTIONS	A	B	L±2	Pcs. Box
1080123	2041	2/5 = 7 Holes	15	10	111	50
1080124	2042	2/8 = 10 Holes	15	10	149	50
1080125	2043	2/10 = 12 Holes	15	10	173	50
1080126	2044	2/13 = 15 Holes	15	10	211	50
1080127	2045	2/20 = 22 Holes	15	10	299	50
1080128	2028	1 meter 79 Holes	15	10	1000	50

MAX. CABLE SECTION			
INCOMING		OUTGOING	
With Terminal	Without Terminal	With Terminal	Without Terminal
35	50	25	35

**Multi Core Cables should be used with a Cord End Terminal*


5 POLE DISTRIBUTION UNIT & ACCESSORIES




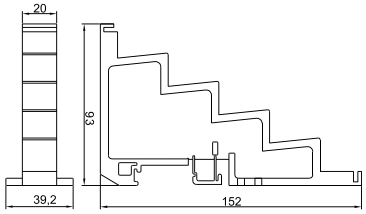

NEW CODE	OLD CODE	DESCRIPTION	Pcs. Box.
1080134	2131	30 x 5 Base (Max. 30x5)	10


ASCENDER PART FOR DISTRIBUTION UNITS

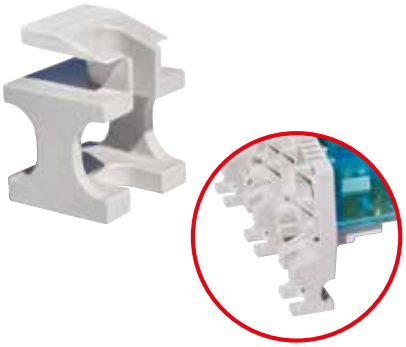

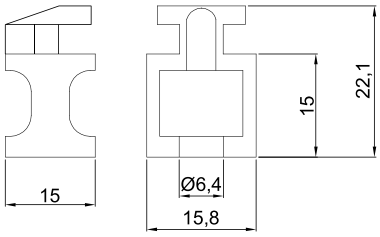

NEW CODE	OLD CODE	DESCRIPTION	Pcs. Box.
1080135	2134	Ascender part for 1-3-5 Pole Distribution Units	100


DISTRIBUTION UNIT ISOLATION APPARATUS

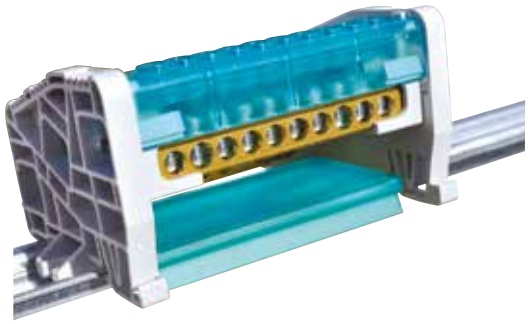



NEW CODE	OLD CODE	DESCRIPTION	Pcs. Box.
1080136	2137	35 mm. Cover Apparatus (1m)	10

FORMING INSULATOR (3/4 Pole - Max. 40x10 mm)

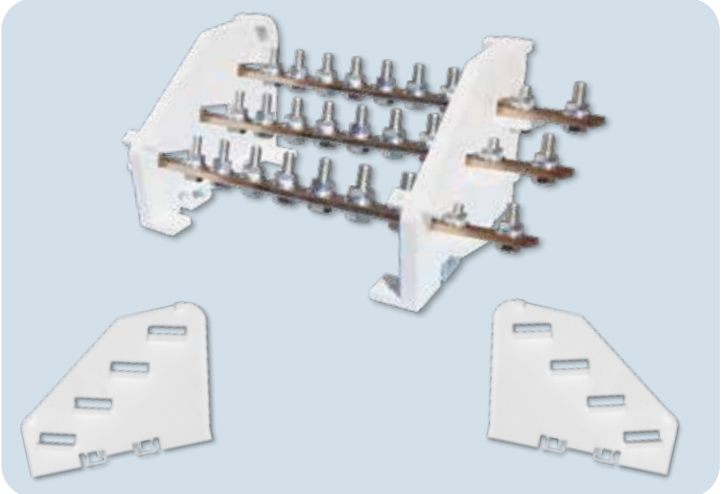

800 AMPER

- *UL94V0 incombustibility standard*
- *Ergonomic and compact structure.*
- *Developed design against short-circuit forces*
- *Easy assembly and operation solution in Form of 1-2-3-4*
- *Safe and aesthetic busbar*

CODE	DESCRIPTION	Pcs. Box.
İRTPF-4003	3-Pole Forming Insulator (Max. 40x10)	1 SET
İRTPF-4004	4-Pole Forming Insulator (Max. 40x10)	1 SET

MONOBLOCK DISTRIBUTION UNITS

	CODE	DESCRIPTIONS	Pcs
	FTG-38049	**80 A** Input: 1 x 2,5-16 mm² Output : 4 x 2.5 - 6 mm² 2 x 2.5 - 16 mm²	1
	FTG-38049 PE	**80 A Yeşil** Input: 1 x 2,5 - 16 mm² Output : 4 x 2.5 - 6 mm² 2 x 2.5 - 16 mm²	1
	FTG-38049 N	**80 A Mavi** Input: 1 x 2,5 - 16 mm² Output : 4 x 2.5 - 6 mm² 2 x 2.5 - 16 mm²	1
	FTG-38041	**125 A** Input: 1 x 10-35 mm² 1 x 6 - 16 mm² Output : 6 x 2.5 - 16 mm²	1
	FTG-38041 PE	**125 A** Input: 1 x 10-35 mm² 1 x 6 - 16 mm² Output : 6 x 2.5 - 16 mm²	1
	FTG-38041 N	**125 A** Input: 1 x 16-35 mm² 1 x 6 - 16 mm² Output : 6 x 2.5 - 16 mm²	1
	FTG-38076	**125 A** Input: 1 x 16-35 mm² Output : 10 x 2.5 - 16 mm²	1
	FTG-38074	**175 A** Input: 1 x 16-70 mm² Output : 10 x 2.5 - 16 mm²	1
	FTG-38074 N	**175 A Mavi** Input: 1 x 16 - 70 mm² Output : 10 x 2.5 - 16 mm²	1
	FTG-38032	**160 A** Input: 1 x 10-70 mm² Output : 6 x 2.5 - 16 mm² Bakır Bara Geçişli	1
	FTG-38020	**250 A** Input: 1 x 35 - 120 mm² Output : 2 x 6 - 35 mm² 5 x 1.5 - 16 mm² 4x1.5-10 mm²	1
	FTG-38019	**400 A** Input: 1x95-185 mm² Output : 2 x 6 - 35 mm² 5 x 1.5 - 16 mm² 4 x 1.5 - 10 mm²	1

	CODE	DESCRIPTIONS	Pcs
	FTG-38404	**400 A** Input : 1 x 70 - 240 mm² Output : 2 x 35 - 120 mm²	1
	FTG-38404N	**400 A** Input : 1 x 70 - 240 mm² Output : 2 x 35 - 120 mm²	1
	FTG-38404PE	**400 A** Input : 1 x 70 - 240 mm² Output : 2 x 35 - 120 mm²	1
	FTG-38404R	**400 A** Input : 1 x 70 - 240 mm² Output : 2 x 35 - 120 mm²	1
	FTG-38403	**400 A** Input : 1 x 70 - 240 mm² Output : 6 x 6 - 50 mm²	1
	FTG-38403N	**400 A** Input : 1 x 70 - 240 mm² Output : 6 x 6 - 50 mm²	1
	FTG-38403PE	**400 A** Input : 1 x 70 - 240 mm² Output : 6 x 6 - 50 mm²	1
	FTG-38403R	**400 A** Input : 1 x 70 - 240 mm² Output : 6 x 6 - 50 mm²	1
	FTG-38402	**400 A** Bara Inputi : 20 x 4 - 25 x 10 mm Output : 2 x 35 - 120 mm²	1
	FTG-38401	**400 A** Bara Inputi 5,5 x 0.8 x 1 mm 24 x 1 x 6 mm Output : 6 x 6 - 50 mm²	1
	FTG-38062	**800 A** Bara Inputi 1 x 35 - 300 mm Bara Genişliği : 50 mm Output 2 x 35 - 300 mm²	1
	FTG-38063	**800 A** Bara Inputi 2 x 35 - 300 mm Bara Genişliği : 20 mm Output 2 x 35 - 300 mm²	1


3 POLE MONOBLOCK




CODE	DESCRIPTIONS	Pcs
FTG-38056	**125 A**, (3 PHASE + NEUTRAL) Input: 1 x 10 - 35 mm² Output: 5 x 1,5 - 6, 2 x 2,5 - 16mm²	1
FTG-38075	**125 A**, (3 PHASE) Input: 1 x 10 - 35 mm² Output: 6 x 2,5 - 16 mm²	1
FTG-38073	**175 A**, (3 PHASE) Input: 1 x 16 - 70 mm² Output: 6 x 2,5 - 16 mm²	1

MONOBLOCK DISTRIBUTION UNIT (950A)



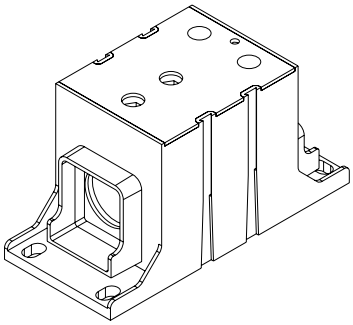





CODE	DESCRIPTIONS	COLOUR	Pcs
FTG-38650	**950 A** Input: 1 x 95 - 500 mm² Output: 2 x 50 - 300 mm²	Gray	1
FTG-38650N		Blue	1
FTG-38650PE		Green	1
FTG-38650R		Red	1

MONOBLOCK DISTRIBUTION UNITS








CODE	DESCRIPTIONS	Pcs
POLL-2080720	**160 A** Input: 1 x 16 - 70 mm², Output: 6 x 2,5 - 35 mm²	5
POLL-2080714	**250 A** Input: 1 x 50 - 150 mm², Output: 3 x 2,5 - 35 mm²	5
POLL-2080718	**250 A** Input: 1 x 35 - 120 mm², Output: 3 x 2,5 - 35 mm², Output: 8 x 2,5 - 16 mm²	5
POLL-2080719	**400 A** Input: 1 x 95 - 185 mm², Output: 4 x 10 - 70 mm², Output: 8 x 2,5 - 16 mm²	5
POLL-2080723	**500 A** Input: 1 x 150 - 240 mm², Output: 4 x 10 - 70 mm², Output: 4 x 2,5 - 16 mm²	5

MONOBLOCK DISTRIBUTION UNITS



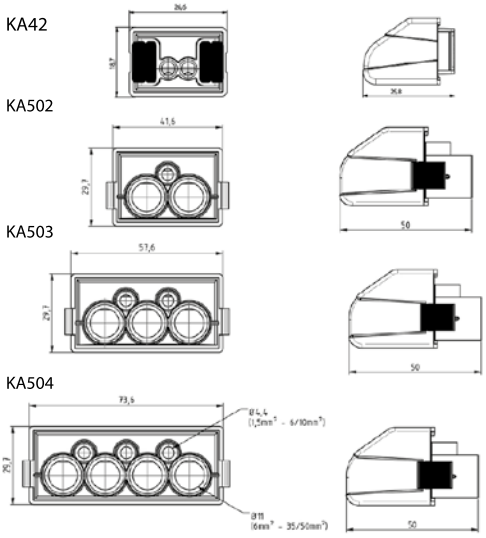



KA42



KA502



KA503N



KA504PE

CODE	DESCRIPTIONS	Pcs
KA42	**690 V AC**, 0,75 - 4 mm2 ,25A(Cu), 125A(AL)	1
KA502	**1000 V DC**, 690 V AC, 2 x 6-35 mm2 ,160A(Cu), 125A(AL)	1
KA502N	**1000 V DC**, 690 V AC, 2 x 6-35 mm2 ,160A(Cu), 125A(AL)	1
KA502PE	**1000 V DC**, 690 V AC, 2 x 6-35 mm2 ,160A(Cu), 125A(AL)	1
KA503	**1000 V DC**, 690 V AC, 3 x 6-35 mm2 ,160A(Cu), 125A(AL)	1
KA503N	**1000 V DC**, 690 V AC, 3 x 6-35 mm2 ,160A(Cu), 125A(AL)	1
KA503PE	**1000 V DC**, 690 V AC, 3 x 6-35 mm2 ,160A(Cu), 125A(AL)	1
KA504	**1000 V DC**, 690 V AC, 4 x 6-35 mm2 ,160A(Cu), 125A(AL)	1
KA504N	**1000 V DC**, 690 V AC, 4 x 6-35 mm2 ,160A(Cu), 125A(AL)	1
KA504PE	**1000 V DC**, 690 V AC, 4 x 6-35 mm2 ,160A(Cu), 125A(AL)	1


FULL INSULATED MONOBLOCK DISTRIBUTION UNITS











CODE	DESCRIPTIONS	Pcs
FTG-38814	**Gray Color, 250A, 1000 V DC , 690 V AC** Input: 1 x 25 - 95 mm² - 1 x 35 - 120 mm², Output : 4 x 1.5 - 10 mm² - 4 x 1.5 - 16 mm²	1
FTG-38814N	**Blue Color, 250A, 1000 V DC , 690 V AC** Input: 1 x 25 - 95 mm² - 1 x 35 - 120 mm², Output : 4 x 1.5 - 10 mm² - 4 x 1.5 - 16 mm²	1
FTG-38814PE	**Green Color, 250A, 1000 V DC , 690 V AC** Input: 1 x 25 - 95 mm² - 1 x 35 - 120 mm², Output : 4 x 1.5 - 10 mm² - 4 x 1.5 - 16 mm²	1
FTG-38814R	**Red Color, 250A, 1000 V DC , 690 V AC** Input: 1 x 25 - 95 mm² - 1 x 35 - 120 mm², Output : 4 x 1.5 - 10 mm² - 4 x 1.5 - 16 mm²	1

ADD-ON TERMINAL BLOCK





KNT1316İ



KNT1316İU

CODE	DESCRIPTIONS	Pcs
FTG-KN T 1316İ	3 x 1,5-10 mm² Insulated	1
FTG-KN T 1316İU	3 x 1,5-16 mm² Insulated	1

MONOBLOCK DISTRIBUTION UNITS



CODE	COLOUR	DESCRIPTIONS	VOLTAGE / CURRENT (V/A)	Pcs
FTG-KS741	Gray	2 x 25 mm² - 14 x 4 mm²	690V / 76A	10
FTG-KS741N	Blue	2 x 25 mm² - 14 x 4 mm²	690V / 76A	10
FTG-KS741PE	Green	2 x 25 mm² - 14 x 4 mm²	690V / 76A	10
FTG-KS741NPE	Blue / Green	1 x 16 mm² - 7 x 4 mm²	690V / 76A	10
FTG-KS741NN	Blue	1 x 16 mm² - 7 x 4 mm²	690V / 76A	10
FTG-KS741RN	Red / Blue	1 x 16 mm² - 7 x 4 mm²	690V / 76A	10

1/1 INPUT-OUTPUT MONOBLOCK DISTRIBUTION UNITS



CODE	DESCRIPTIONS	INPUT OUTPUR	CABLE SECTION	CURRENT		Pcs
				CU	AL	
FTG-KVIAC11150G	25 - 150 mm² Gray	1/1	25 - 150 mm²	315	250	20
FTG-KVIAC11150B	25 - 150 mm² Blue	1/1	25 - 150 mm²	315	250	10
FTG-KVIAC11150YG	25 - 150 mm² Yellow / Green	1/1	25 - 150 mm²	315	250	10
FTG-KVIAC11240G	35 - 240 mm² Gray	1/1	35 - 240 mm²	400	315	10
FTG-KVIAC11240B	35 - 240 mm² Yellow / Blue	1/1	35 - 240 mm²	400	315	3
FTG-KVIAC11240YG	35 - 240 mm² Yellow / Green	1/1	35 - 240 mm2	400	315	3

2/2 INPUT-OUTPUT MONOBLOCK DISTRIBUTION UNITS



KVIAC12150B

CODE	DESCRIPTIONS	INPUT OUTPUR	CABLE SECTION	CURRENT		Pcs
				CU	AL	
FTG-KVIAC12035G	2.5 - 35 mm² Gray	2 / 2	6 - 35 mm²	2x125	100	30
FTG-KVIAC12035B	2.5 - 35 mm² Blue	2 / 2	6 - 35 mm²	2x125	100	15
FTG-KVIAC12035YG	2.5 - 35 mm² Yellow / Green	2 / 2	6 - 35 mm²	2x125	100	15
FTG-KVIAC12050G	2.5 - 50 mm² Gray	2 / 2	2.5 - 50 mm²	2x160	125	15
FTG-KVIAC12050B	2.5 - 50 mm² Blue	2 / 2	2.5 - 50 mm²	2x160	125	15
FTG-KVIAC12050YG	2.5 - 50 mm² Yellow / Green	2 / 2	2.5 - 50 mm²	2x160	125	15
FTG-KVIAC12095G	6 - 95 mm² Gray	2 / 2	6 - 95 mm²	2x250	200	30
FTG-KVIAC12095B	6 - 95 mm² Blue	2 / 2	6 - 95 mm²	2x250	200	15
FTG-KVIAC12095YG	6 - 95 mm² Yellow / Green	2 / 2	6 - 95 mm²	2x250	200	15
FTG-KVIAC12150G	2 x 25-150 mm² Gray	2/2	25 - 150 mm²	2x315	250	1
FTG-KVIAC12150B	25 - 150 mm² Blue	2 / 2	25 - 150 mm²	2x315	250	5
FTG-KVIAC12150YG	25 - 150 mm² Yellow / Green	2 / 2	25 - 150 mm²	2x315	250	5

MONOBLOCK DISTRIBUTION UNITS


KVIAC12050YG

CODE	DESCRIPTIONS	INPUT OUTPUR	CABLE SECTION	CURRENT		Pcs
				CU	AL	
FTG-KVIAC12240G	2 Input, 2 Output, 2 x 35 - 240 mm² Gray	2/2	35 - 240 mm²	2x400	315	1
FTG-KVIAC12240B	35 - 240 mm² Blue	2/2	35 - 240 mm²	2x400	315	3
FTG-KVIAC12240YG	35 - 240 mm² Yellow / Green	2/2	35 - 240 mm²	2x400	315	3


MONOBLOCK DISTRIBUTION UNITS



CODE	DESCRIPTIONS	INPUT OUTPUR	CABLE SECTION	CURRENT		Pcs
				CU	AL	
FTG-KVIAC31050G	2.5 - 50 mm² Gray	3x1 / 3x1	2.5 - 50 mm²	3x160	125	20

MONOBLOCK DISTRIBUTION UNITS


KVIAC51016G


KVIAC32035G


CODE	DESCRIPTIONS	INPUT OUTPUR	CABLE SECTION	CURRENT		Pcs
				CU	AL	
FTG-KVIAC14016G	2,5 - 16 mm² Gray	4xFlexibel	2,5 - 16 mm²	200	160	30
FTG-KVIAC14016B	2,5 - 16 mm² Blue	4xFlexibel	2,5 - 16 mm²	200	160	15
FTG-KVIAC14016YG	2,5 - 16 mm² Yellow / Green	4xFlexibel	2,5 - 16 mm²	200	160	15
FTG-KVIAC51016G	2,5 - 16 mm² Gray	5x1 / 5x1	2,5 - 16 mm²	5x80	63	10
FTG-KVIAC51016B	2,5 - 16 mm² Blue	5x1 / 5x1	2,5 - 16 mm²	5x80	63	30
FTG-KVIAC51016YG	2,5 - 35 mm² Green	5x1 / 5x1	2,5 - 35 mm²	5x80	63	30
FTG-KVIAC32035G	2,5 - 35 mm² Gray	3x2 / 3x2	2,5 - 35 mm²	3x2x160	125	1

FULL INSULATED MONOBLOCK DISTRIBUTION UNITS




CODE	DESCRIPTIONS	Pcs
FTG-38811	125A, Gray Input : 2 x 10 - 35, Output : 2 x 2,5 - 25,6 x 1,5 - 16	10
FTG-38811N	125A, Blue Input : 2 x 10 - 35, Output : 2 x 2,5 - 25,6 x 1,5 - 16	5
FTG-38811PE	125A, Green Input : 2 x 10 - 35, Output : 2 x 2,5 - 25,6 x 1,5 - 16	5
FTG-38811R	125A, Red Input : 2 x 10 - 35, Output : 2 x 2,5 - 25,6 x 1,5 - 16	6
FTG-38812	160A, Gray Input : 2 x 25 - 70, Output : 3 x 2,5 - 25, 8 x 1,5 - 16	3
FTG-38812N	160A, Blue Input : 2 x 25 - 70, Output : 3 x 2,5 - 25, 8 x 1,5 - 16	3
FTG-38812PE	160A, Green Input : 2 x 25 - 70, Output : 3 x 2,5 - 25, 8 x 1,5 - 16	30
FTG-38812R	160A, Red Input : 2 x 25 - 70, Output : 3 x 2,5 - 25, 8 x 1,5 - 16	15

NEUTRAL & EARTH DISTRIBUTION BLOCKS (FULL INSULATED)

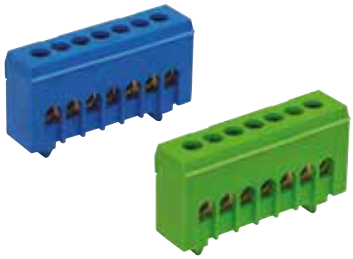

CODE	DESCRIPTIONS	CABLE SECTION	Pcs
FTG-870 N/7FS	7 x 16 mm² Blue	16 mm²	10
FTG-870 S/7FS	7 x 16 mm² Green/Yellow	16 mm²	10
FTG-870 N/15S	15 x 16 mm² Blue	16 mm²	10
FTG-870 S/15S	15 x 16 mm² Green/Yellow	16 mm²	10

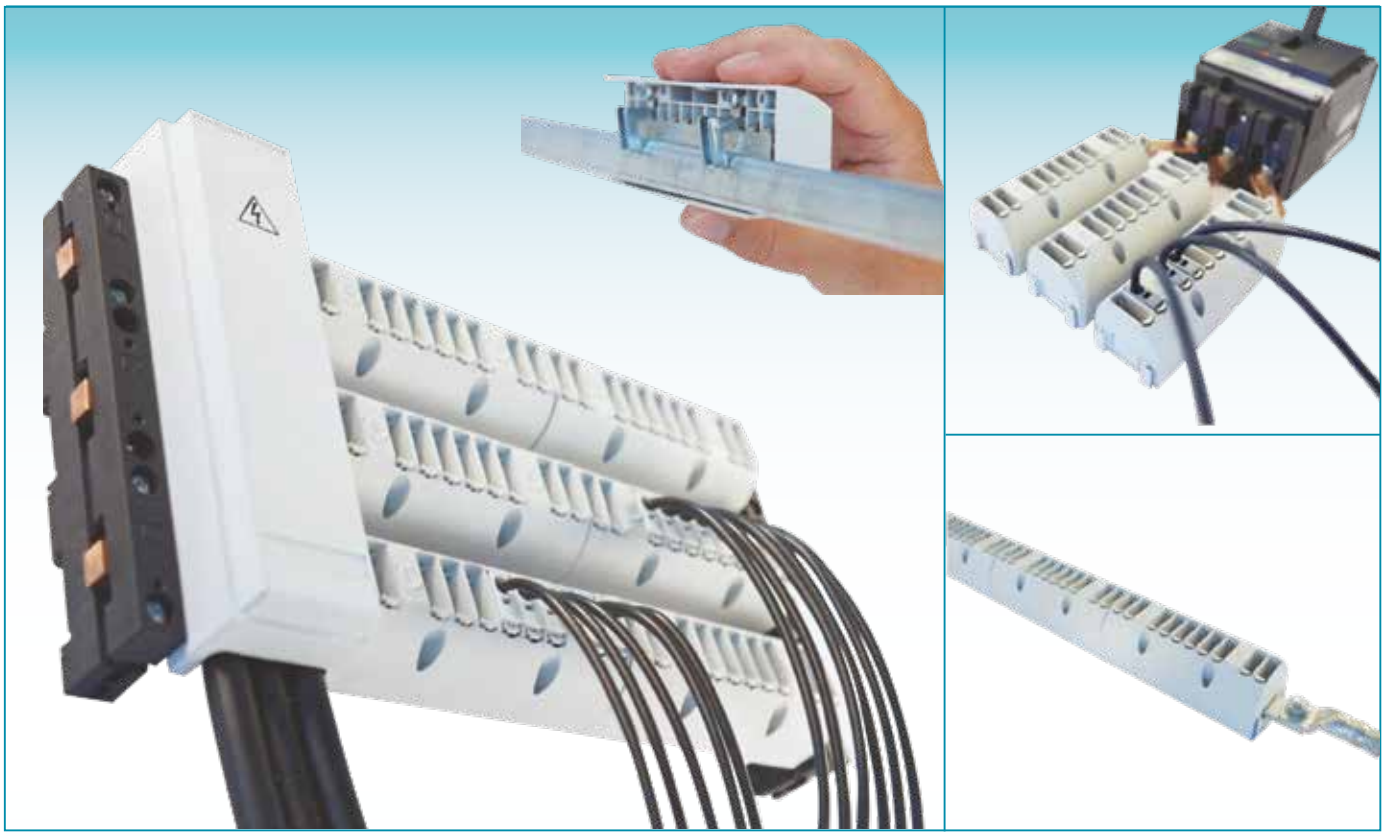


MC 22001


MC 22002


MC 22003


MC 00001 N


PUSH IN







MINI CLIC

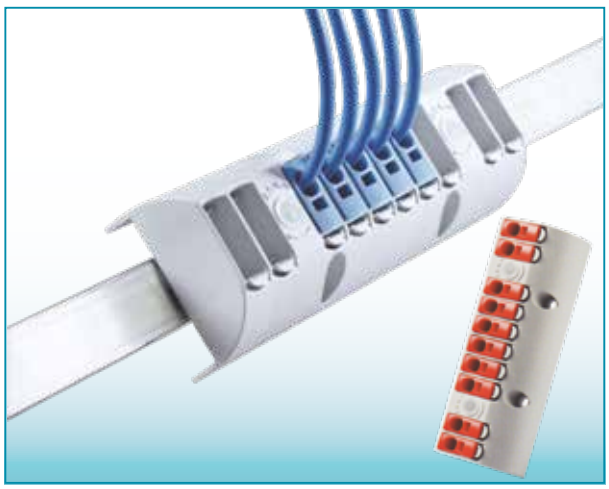

CODE	DESCRIPTIONS	Pcs
FTG-MC 22001	Mini Clic Basis	1
FTG-MC 22002	Mini Clic Incomer, Input 25 - 120 mm^2	1
FTG-MC 22003	Mini Clic Pin, Input M8	1
FTG-MC 00001	Mini Clic Cube Gray, Cable Section 1,5 - 10 mm^2	10
FTG-MC 00001 N	Mini Clic Cube Blue, Cable Section 1,5 - 10 mm^2	10
FTG-MC 00001 PE	Mini Clic Cube Green, Cable Section 1,5 - 10 mm^2	10
FTG-MC 00001 R	Mini Clic Cube Red, Cable Section 1,5 - 10 mm^2	10

MONOBLOCK DISTRIBUTION UNITS






CODE	DESCRIPTIONS	PCS/BOX
ONK80	**80 A** Input : 3 x 6 - 16 mm² Output : 4 x 2.5 - 6 mm² 3 x 2,5 - 16 mm²	1



CODE	DESCRIPTIONS	PCS/BOX
ONK125	**125 A** Input : 1 x 10 - 35 mm² 1 x 2,5 - 16 mm² Output : 6 x 2,5 - 16 mm²	1

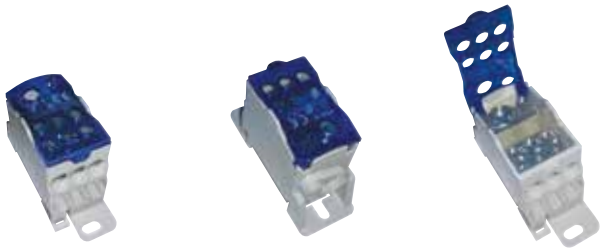

CODE	DESCRIPTIONS	PCS/BOX
ONK160	**160 A** Input : 1 x 10 - 70 mm² 1 x 2,5 - 16 mm² Output : 6 x 2,5 - 16 mm²	1



CODE	DESCRIPTIONS	PCS/BOX
ONK250	**250 A** Input : 1 x 35 - 120 mm² Output : 2 x 6 - 35 mm² 5 x 2,5 - 16 mm² 4 x 2.5 - 10 mm²	1



CODE	DESCRIPTIONS	PCS/BOX
ONK400	**400 A** Input: 1 x 95 - 185 mm² Output : 2 x 6 - 35 mm² 5 x 2,5 - 16 mm² 4 x 2.5 - 10 mm²	1



CODE	DESCRIPTIONS	PCS/BOX
ONK500	**500 A** Bar Input: 9,3 x 26,4 mm² Output : 2 x 6 - 35 mm² 5 x 2,5 - 16 mm² 4 x 2.5 - 10 mm²	1









W AUTOMAT BUSBARS

Technical Features ;

- *The conductor is 100% copper*
- *Isolation section is higt impact resistant hard PVC material*
- *UL94V0 flammability standard*
- *Insulation support on the connection surface*
- *Insulation support with detachable side cover*
- *Production in metered length, gives the possibility to use it according to the number of desired modules*

Range of Products;

- *1- Phase W Automat Busbars*
- *2- Phase W Automat Busbars*
- *3- Phase W Automat Busbars*
- *3- Phase + Neutral W Automat Busbars*
- *Insulated engine protection bars (63 Amperes)*
- *Monophase W otomate bar, pin type (2 mm)*
- *(L1+N, L2+N, L3+N) W automat busbars, (80 A)*
- *Modular power connectors*




W AUTOMAT BUSBARS


1-PHASE W AUTOMAT BUSBARS





MATERIAL	
Material	Elecrolitic Copper
Isolation	PVC
Conductivity Coefficient	56ms/m

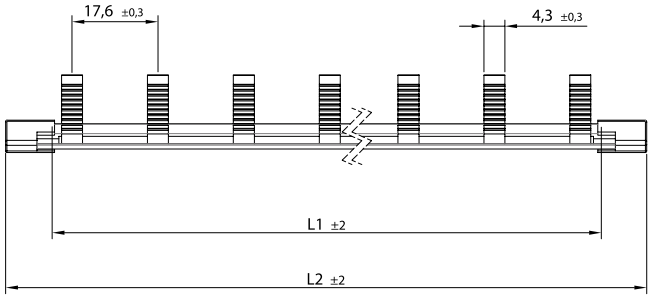




1 mm Cu 80 A CODE	1.5 mm Cu 100 A CODE	2 mm Cu 125 A CODE	MODUL	L1 (mm)	L2 (mm)	PCS BOX
ONKA-3006	ONKA-3001	ONKA-3011	12	199	219	50
ONKA-3007	ONKA-3002	ONKA-3012	18	304	324	50
ONKA-3008	ONKA-3003	ONKA-3013	24	409	429	50
ONKA-3009	ONKA-3004	ONKA-3014	30	514	534	50
ONKA-3010	ONKA-3005	ONKA-3015	56	970	990	50
ONKA-3000	Plastic Covers of Busbars					100





Code: 3000

2-PHASE W AUTOMAT BUSBARS





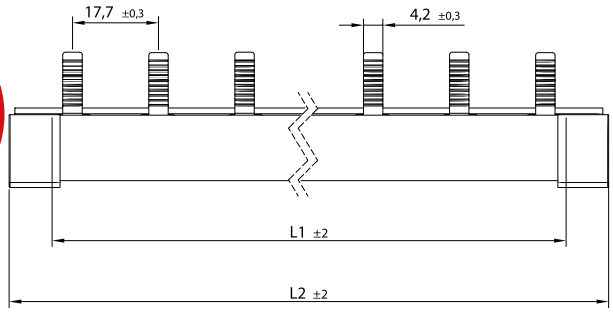





1 mm Cu 80 A CODE	1.5 mm Cu 100 A CODE	MODUL	L1 (mm)	L2 (mm)	PCS BOX
ONKA - 3021	ONKA - 3031	6	199	219	30
ONKA - 3022	ONKA - 3032	9	304	324	30
ONKA - 3023	ONKA - 3033	12	409	429	30
ONKA - 3024	ONKA - 3034	15	514	534	30
ONKA - 3025	ONKA - 3035	28	970	990	30
ONKA - 3026	Plastic Covers of Busbars				100




Code: 3026


3-PHASE W AUTOMAT BUSBARS

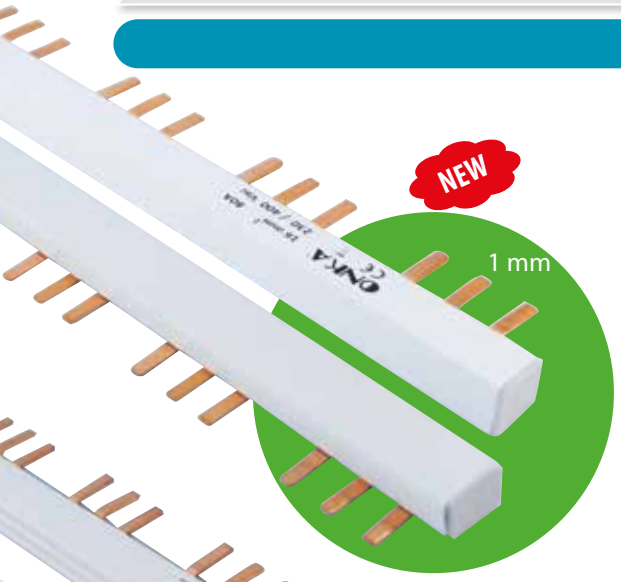




MATERIAL	
Material	Elecrolitic Copper
Isolation	PVC
Conductivity Coefficient	56ms/m

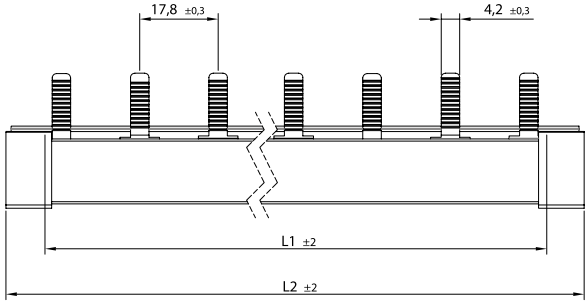



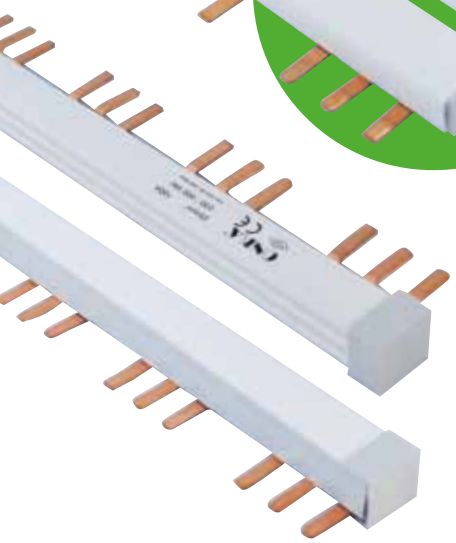




Code: 3056 Kod: 5833


1 mm Cu 80 A CODE	1.5 mm Cu 100 A CODE	2 mm Cu 125 A CODE	MODUL	L1 (mm)	L2 (mm)	PCS BOX
ONKA-3041	ONKA-3051	ONKA-3066	4	199	219	30
ONKA-3042	ONKA-3052	ONKA-3067	6	304	324	30
ONKA-3043	ONKA-3053	ONKA-3068	8	409	429	30
ONKA-3044	ONKA-3054	ONKA-3069	10	514	534	30
ONKA-3045	ONKA-3055	ONKA-3070	20	1040	1060	25
ONKA-3056	Plastic Covers of Busbars (1,5 - 2 mm)					100
ONKA-5833	1 mm Plastic Covers of Busbars (1 mm)					100

3-PHASE + NOTR W AUTOMAT BUSBARS





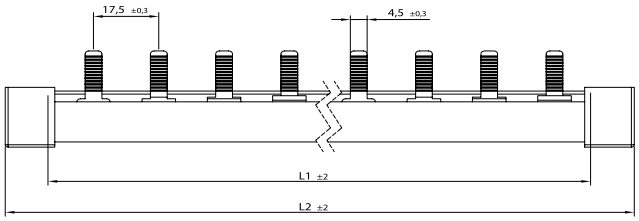



Code: 3057


1.5 mm Cu 100 A CODE	MODUL	L1 (mm)	L2 (mm)	PCS/BOX
ONKA-3058	4	286	306	16
ONKA-3059	8	550	570	16
ONKA-3060	14 (1 m)	970	990	16
ONKA-3057	Plastic Covers of Busbars			100

INSULATED ENGINE PROTECTION BARS (63 AMPERES)




CODE	DESCRIPTIONS	BOX PCS
ONKA-MSVG54-14-2	Engine Protection Bar, Double Module, Tread Width 45 + 9 = 54 mm	1
ONKA-MSVG54-14-4	Engine Protection Bar, Quart Module, Tread Width 45 + 9 = 54 mm	1
ONKA-MSVG54-14-5	Engine Protection Bar, Quin Module, Tread Width 45 + 9 = 54 mm	1
ONKA-MSVG45-14-3	Engine Protection Bar, Triple Module, With No Space, Tread Width 45 mm	1
ONKA-MSVG45-14-4	Engine Protection Bar, Quart Module, With No Space, Tread Width 45 mm	1

(L1+N, L2+N, L3+N) W AUTOMAT BUSBARS, (80 A)

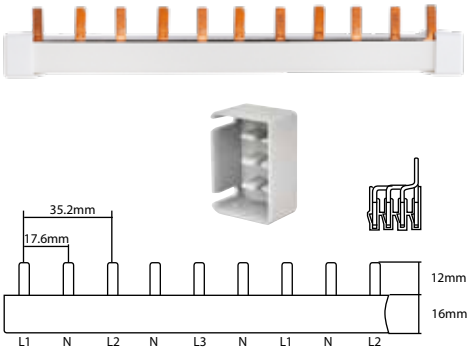

CODE	DESCRIPTIONS	BOX PCS
FTG-4S16L54A0A0N-01	L1 + N, L2 + N, L3 + N . . . 13 MODULES 1 mt	1
FTG-A2	Plastic Covers of Busbars	1

MODULAR POWER CONNECTORS

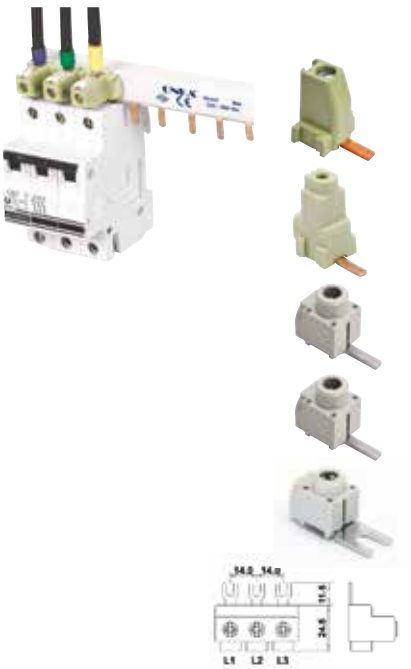


NEW CODE	OLD CODE	DESCRIPTIONS	BOX PCS
1140013	ONKA- 3061	Modular (Power) Connectors No.1 (2.5 - 10 mm^2)	150
1140014	ONKA-3065	Modular (Power) Connectors No.2 (16 - 25 mm^2)	100
FTG-802/115 S		No.2 (6 - 25 mm^2)	30
FTG-802/215 S		No.3 (6 - 50 mm^2)	25
FTG-802/114		No.2 (6 - 25 mm^2) Fork Type	25
FTG-MSV GE 1-14		No.2 (6 - 25 mm^2)Fork Type , Triple (L1,L2,L3)	1

NEUTRAL GRAUNDED BUSBAR (SCREW-ON / FLAT COPPER)






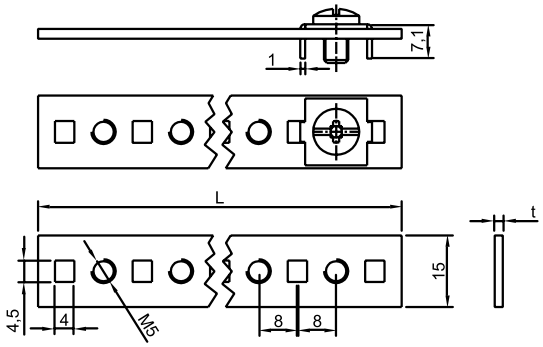

NEW CODE	OLD CODE	DESCRIPTIONS		Current (A)	t (mm)	L (mm)	Pcs. Box
		Screws	Dia				
1140001	ONKA-3075	31	1.5 x 15 mm	100	1,50	1000	25
1140002	ONKA-3076	62	1.5 x 15 mm	100	1,50	1000	25
1140003	ONKA-3080	31	2 x 15 mm	125	2	1000	25
1140004	ONKA-3087	62	2 x 15 mm	125	2	1000	25
1140005	ONKA-3088	31	3 x 15 mm	150	3	1000	25
1140006	ONKA-3086	62	3 x 15 mm	150	3	1000	25

NEUTRAL GRAUNDED BUSBAR SUPPORT (SCREW-ON / FLAT COPPER)



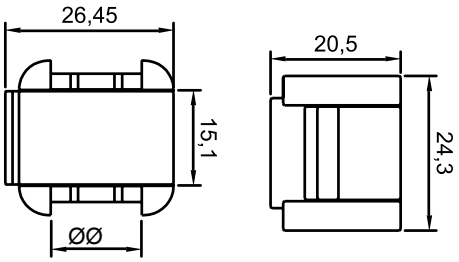

NEW CODE	OLD CODE	DESCRIPTIONS	Pcs. Box
1140015	ONKA-3091	Busbar Support	100









MOUNTING DIN RAILS

Technical Features ;


- *Made of DKP material*
- *With dimension of 35 x 15 mm and 15x5,5 mm, are produced in accordance with international standards*
- *There are two different coating alternatives as CR + 3 and Galvanized.*
- *Regarding the desired lenghts, special production can be made by cutting rails that provides time and cost saving*
- *35 x 7,5 mm 35 x 15 mm aluminium rail alternatives are available for carrying order to carry heavy materials*

Range of Products;

- *35 x 7,5 & 35 x 15 - Flat & Slotted - Sheet Mounting Din Rails (Galvanized)*
- *35 x 7,5 & 35 x 15 - Flat & Slotted - Sheet Mounting Din Rails (CR+3)*
- *15 x 5,5 Flat & Slotted - Sheet Mounting Din Rails (Galvanized)*
- *35 x 7,5 & 35 x 15 - Flat & Slotted - Aluminium Mounting Din Rails*
- *MG type flat aluminium Din Rails*

MOUNTING DIN RAILS

MOUNTING DIN RAILS

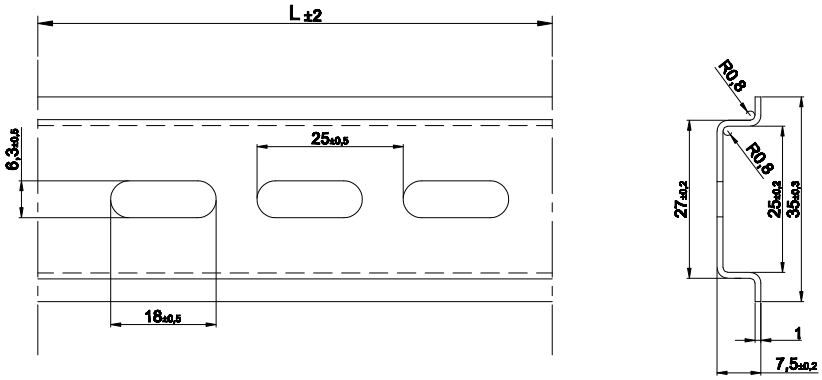

35 x 7,5 FLAT SHEET MOUNTING DIN RAILS (Galvanized)




NEW CODE	OLD CODE	TYPE	Pcs.
1100083	ONKA-4211	30 cm	100
1100084	ONKA-4212	1 m	50
1100085	ONKA-4213	2 m	50
1100086	ONKA-4214	3 m	25

35 x 7,5 SLOTTED SHEET MOUNTING DIN RAILS (Galvanized)



NEW CODE	OLD CODE	TYPE	Pcs.
1100090	ONKA-4221	30 cm	100
1100091	ONKA-4222	1 m	50
1100092	ONKA-4223	2 m	50
1100093	ONKA-4224	3 m	25

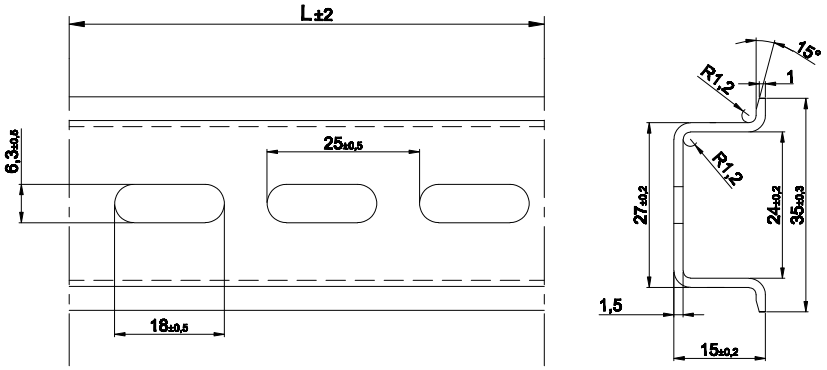

35 x 15 FLAT SHEET MOUNTING DIN RAILS (Galvanized)




NEW CODE	OLD CODE	TYPE	Pcs.
1100099	ONKA-4231	30 cm	100
1100100	ONKA-4232	1 m	25
1100101	ONKA-4233	2 m	25
1100102	ONKA-4234	3 m	25

35 x 15 SLOTTED SHEET MOUNTING DIN RAILS (Galvanized)



NEW CODE	OLD CODE	TYPE	Pcs.
1100104	ONKA-4241	30 cm	100
1100105	ONKA-4242	1 m	25
1100106	ONKA-4243	2 m	25
1100107	ONKA-4244	3 m	25

MOUNTING DIN RAILS

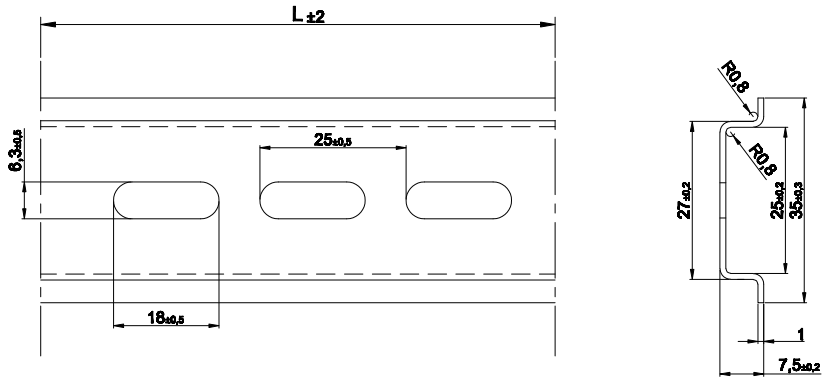

35 x 7,5 FLAT SHEET MOUNTING DIN RAILS (Cr + 3 Plated)




NEW CODE	OLD CODE	TYPE	Pcs.
1100011	ONKA-4021	30 cm	100
1100012	ONKA- 4022	1 m	50
1100013	ONKA- 4023	2 m	50
1100014	ONKA- 4024	3 m	25

35 x 7,5 SLOTTED SHEET MOUNTING DIN RAILS (Cr + 3 Plated)



NEW CODE	OLD CODE	TYPE	Pcs.
1100016	ONKA- 4031	30 cm	100
1100017	ONKA- 4032	1 m	50
1100018	ONKA- 4033	2 m	50
1100019	ONKA- 4034	3 m	25

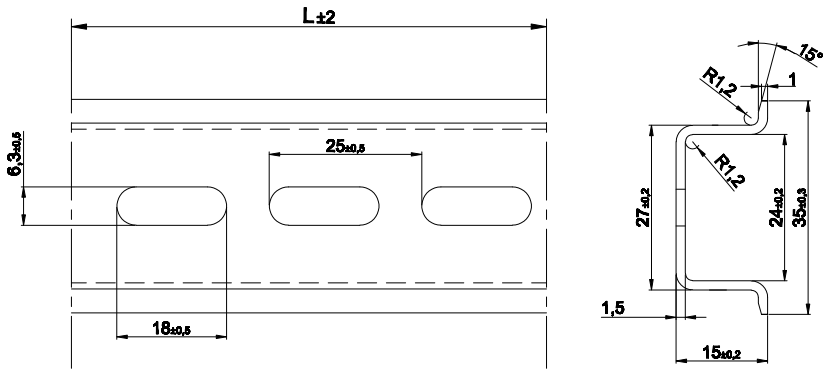

35 x 15 FLAT SHEET MOUNTING DIN RAILS (Cr + 3 Plated)




NEW CODE	OLD CODE	TYPE	Pcs.
1100034	ONKA- 4061	30 cm	100
1100035	ONKA- 4062	1 m	25
1100036	ONKA- 4063	2 m	25
1100037	ONKA- 4064	3 m	25

35 x 15 SLOTTED SHEET MOUNTING DIN RAILS (Cr + 3 Plated)



NEW CODE	OLD CODE	TYPE	Pcs.
1100039	ONKA- 4071	30 cm	100
1100040	ONKA- 4072	1 m	25
1100041	ONKA- 4073	2 m	25
1100042	ONKA- 4074	3 m	25

MOUNTING DIN RAILS

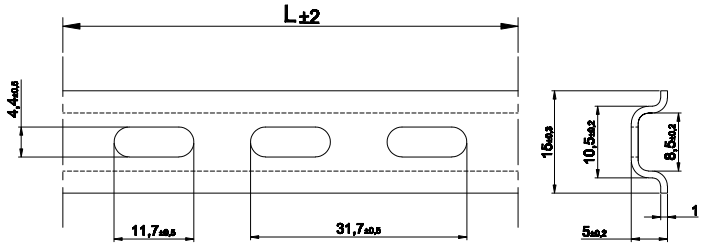


15 x 5,5 FLAT SHEET MOUNTING DIN RAILS (Galvanized)



NEW CODE	OLD CODE	TYPE	Pcs.
1100109	ONKA- 4246	30 cm	100
1100110	ONKA- 4247	1 m	100
1100111	ONKA- 4248	2 m	100
1100112	ONKA- 4249	3 m	100

15 x 5,5 SLOTTED SHEET MOUNTING DIN RAILS (Galvanized)




NEW CODE	OLD CODE	TYPE	Pcs.
1100114	ONKA- 4251	30 cm	100
1100115	ONKA- 4252	1 m	100
1100116	ONKA- 4253	2 m	100
1100117	ONKA- 4254	3 m	100

15 x 5,5 FLAT SHEET MOUNTING DIN RAILS (Cr + 3 Plated)



NEW CODE	OLD CODE	TYPE	Pcs.
1100054	ONKA- 4101	30 cm	100
1100055	ONKA- 4102	1 m	100
1100056	ONKA- 4103	2 m	100
1100057	ONKA- 4104	3 m	100

15 x 5,5 SLOTTED SHEET MOUNTING DIN RAILS (Cr + 3 Plated)




NEW CODE	OLD CODE	TYPE	Pcs.
1100059	ONKA- 4111	30 cm	100
1100060	ONKA- 4112	1 m	100
1100061	ONKA- 4113	2 m	100
1100062	ONKA- 4114	3 m	100

MECHANIC RAIL CUTTING SHEARS




CODE	DESCRIPTION	Pcs.
MRK-1	Cuts 1 kind of rail (35x7,5) and drills Ø5.5 mm into the rail	1
MRK-2	Cuts 2 kind of rail (35x7,5 - 35x15) and drills Ø5.5 mm into the rail	1
MRK-5	Cuts 4 kind of copper busbar 3x30 mm and (5,5x15 - 7,5x35 - 10x35 - 15x35) and drills Ø5.5 mm into the rail	1

MOUNTING DIN RAILS

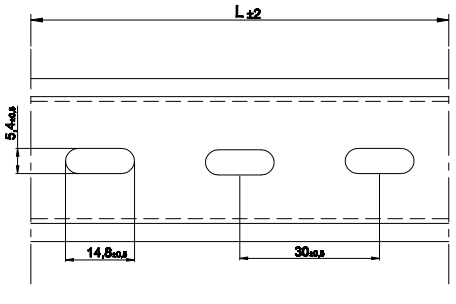

MG TYPE MOUNTING DIN RAILS

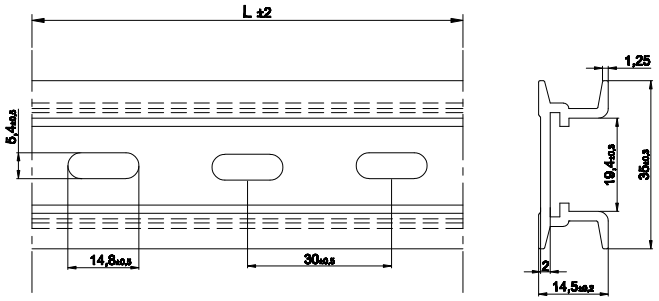

35 x 7,5 FLAT SHEET ALUMINIUM DIN RAILS



NEW CODE	OLD CODE	TYPE	Pcs.
1100065	ONKA-4121	30 cm	100
1100066	ONKA- 4122	1 m	35
1100067	ONKA- 4123	2 m	25
1100068	ONKA- 4124	3 m	100

MG TYPE FLAT SHEET ALUMINIUM DIN RAILS



NEW CODE	OLD CODE	TYPE	Pcs.
1100075	ONKA- 4141	30 cm	25
1100076	ONKA- 4142	1 m	25
1100077	ONKA- 4143	2 m	25
1100078	ONKA- 4144	3 m	25

35 x 7,5 SLOTTED SHEET ALUMINIUM DIN RAILS



NEW CODE	OLD CODE	TYPE	Pcs.
1100070	ONKA- 4131	30 cm	100
1100071	ONKA- 4132	1 m	35
1100072	ONKA- 4133	2 m	25
1100073	ONKA- 4134	3 m	100


MG TYPE SLOTTED SHEET ALUMINIUM DIN RAILS



NEW CODE	OLD CODE	TYPE	Pcs.
1100079	ONKA-4146	30 cm	25
1100080	ONKA- 4147	1 m	25
1100081	ONKA- 4148	2 m	25
1100082	ONKA- 4149	3 m	25

SHEET MOUNTING RAIL SUPPORT (CR+3 PLATED)





NEW CODE	OLD CODE	TYPE	Pcs.
1100119	ONKA-4172	Sheet Mounting Rail Support	100

SHEET MOUNTING RAIL SUPPORT (ALUMINIUM)



CODE	TYPE	Pcs.
ONKA-4161	Sheet Mounting Rail Support (Aluminium)	100

ALUMINIUM LIFT TOOL



CODE	TYPE	Pcs.
BA16050	Ø16x50 mm	100
BA16080	Ø16x80 mm	100
BA16100	Ø16x100 mm	100

METAL RAIL LIFT TOOL



CODE	TYPE	Pcs.
BC16050	Ø16x50 mm	100
BC16080	Ø16x80 mm	100
BC16100	Ø16x100 mm	100









Range of Products;

- *Standard copper cable lugs*
- *Extra standard copper cable lugs*
- *Fork type copper cable lugs*
- *Long type copper cable lugs*
- *DIN norm copper cable lugs*
- *45⁰ - 90⁰ Copper cable lugs*
- *Aluminium cable lugs*
- *DIN Norm Aluminium cable lugs*
- *Welded type copper cable lugs*
- *Standard copper mini butt connectors*
- *Extra standard copper butt connectors*
- *DIN norm copper butt connectors 46235 type*
- *DIN norm aluminium copper butt connectors*
- *Bimetal (AL-CU) Cable lugs*
- *Bimetal (AL-CU) Long type cable lugs*
- *Aluminium copper butt connectors (Pins)*
- *Aluminium Copper butt connectors*
- *KJB type bimetal (AL-CU)*


99.9 % Electrolytic Cu


CABLE LUGS
BUTT CONNECTORS

STANDARD CABLE LUGS





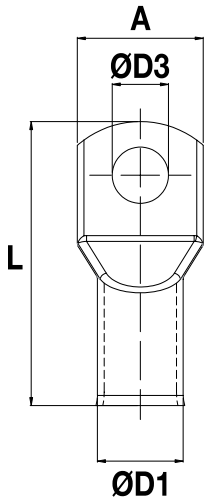

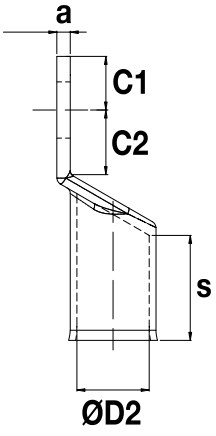



OLD CODE	CABLE CROSS SECTION (mm²)	NEW CODE	BOLT (Ø)	ØD1 (mm)	ØD2 (mm)	L (mm)	ØD3 (mm)	A (mm)	C1 (mm)	C2 (mm)	a (mm)	s (mm)	Pcs/Box
ONKA-6250	6	1090348	M5	5,5	4	24	5,5	7,9	6	5	1,5	9	1500
		1090349	M6	5,5	4	24	6,5	7,9	6	5	1,5	9	
ONKA-6251	10	1090351	M5	6,5	5	24,9	5,3	9,4	5,7	6,3	1,5	9	1250
		1090352	M6	6,5	5	24,9	6,5	9,4	5,7	6,3	1,5	9	
ONKA-6252	16	1090356	M6	7	5,5	27,7	6,5	10,3	6,4	5,6	1,5	10	750
		1090357	M8	7	5,5	28,3	8,5	12,7	6,4	6,7	1	10	
ONKA-6253	25	1090360	M6	9	7,5	34	6,5	13,4	7,5	8,5	1,5	11,5	450
		1090361	M8	9	7,5	34	8,4	13,4	7,5	8,5	1,5	11,5	
ONKA-6254	35	1090365	M6	10,5	8,5	39	6,5	15,6	8,7	9,3	2	14	300
		1090366	M8	10,5	8,5	39	8,5	15,6	8,7	9,3	2	14	
		1090367	M10	10,5	8,5	39	10,5	15,6	8,7	9,3	2	14	
ONKA-6255	50	1090370	M8	12	10	46,6	8,5	17,8	10,3	11,2	2	17	175
		1090371	M10	12	10	46,6	10,5	17,8	10,3	11,2	2	17	
		1090372	M12	12	10	46,6	13	17,8	10,3	11,2	2	17	
		1090373	M14	12	10	46,6	14,5	17,8	10,3	11,2	2	17	
ONKA-6256	70	1090376	M8	14	11,5	49,2	8,5	20,4	10,7	10,8	2,5	17	125
		1090377	M10	14	11,5	49,2	10,5	20,4	10,7	10,8	2,5	17	
		1090378	M12	14	11,5	49,2	13	20,4	10,7	10,8	2,5	17	
		1090379	M14	14	11,5	49,2	14,5	20,4	10,7	10,8	2,5	17	
ONKA-6257	95	1090382	M8	16	13,5	53,5	10,5	23,7	10,3	11,7	2,5	21	75
		1090383	M10	16	13,5	53,5	13	23,7	10,3	11,7	2,5	21	
		1090384	M12	16	13,5	53,5	14,5	23,7	10,3	11,7	2,5	21	
		1090385	M14	16	13,5	53,5	17	23,7	10,3	11,7	2,5	21	
ONKA-6258	120	1090391	M10	18	15,5	64	10,5	27	13,7	13,3	2,5	24	50
		1090392	M12	18	15,5	64	13	27	13,7	13,3	2,5	24	
		1090393	M14	18	15,5	64	14,5	27	13,7	13,3	2,5	24	
		1090394	M16	18	15,5	64	17	27	13,7	13,3	2,5	24	
ONKA-6259	150	1090399	M10	20	16,5	71,2	10,5	29,4	17,4	16,6	3,5	24	40
		1090400	M12	20	16,5	71,2	13	29,4	17,4	16,6	3,5	24	
		1090401	M14	20	16,5	71,2	14,5	29,4	17,4	16,6	3,5	24	
		1090402	M16	20	16,5	71,2	17	29,4	17,4	16,6	3,5	24	
ONKA-6260	185	1090407	M10	22	18,5	77	10,5	32,4	17,4	17,6	3,5	27	30
		1090408	M12	22	18,5	77	13	32,4	17,4	17,6	3,5	27	
		1090409	M14	22	18,5	77	14,5	32,4	17,4	17,6	3,5	27	
		1090410	M16	22	18,5	77	17	32,4	17,4	17,6	3,5	27	
		1090412	M20	22	18,5	77	20,5	32,4	17,4	17,6	3,5	27	
ONKA-6261	240	1090416	M10	25,5	21,5	83,5	10,5	37,6	17,4	17,6	4	32	25
		1090417	M12	25,5	21,5	83,5	13	37,6	17,4	17,6	4	32	
		1090418	M14	25,5	21,5	83,5	14,5	37,6	17,4	17,6	4	32	
		1090419	M16	25,5	21,5	83,5	17	37,6	17,4	17,6	4	32	
		1090421	M20	25,5	21,5	83,5	20,5	37,6	17,4	17,6	4	32	

LONG TYPE COPPER CABLE LUGS





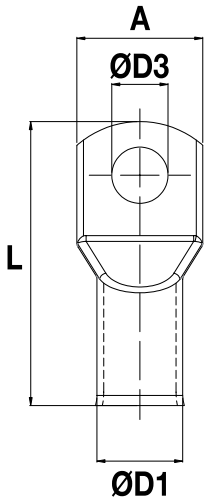

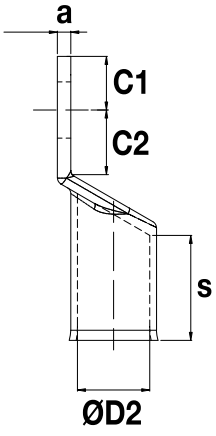



OLD CODE	CABLE CROSS SECTION (mm²)	NEW CODE	BOLT (Ø)	ØD1 (mm)	ØD2 (mm)	L (mm)	ØD3 (mm)	A (mm)	C1 (mm)	C2 (mm)	a (mm)	s (mm)	Pcs/Box
ONKA-6401	6	1090002	M5	5,5	4	25,7	5,5	7,9	6	5	1,5	11	1500
		1090003	M6	5,5	4	25,7	6,5	7,9	6	5	1,5	11	
ONKA-6402	10	1090005	M5	6,5	5	27,3	5,5	11,2	5,6	6,4	1,5	11	1000
		1090006	M6	6,5	5	27,3	6,5	11,2	5,6	6,4	1,5	11	
ONKA-6403	16	1090435	M6	7	5,5	29,7	6,5	10,3	5,6	6,4	1,5	14	600
		1090436	M8	7	5,5	31	8,5	12,7	5,6	6,9	1,1	14	
ONKA-6404	25	1090439	M6	9	7,5	40	6,5	13,4	7,3	8,3	1,5	16	300
		1090440	M8	9	7,5	40	8,5	13,4	7,3	8,3	1,5	16	
ONKA-6405	35	1090444	M6	10,5	8,5	43,3	6,5	15,6	8,6	9,4	2	19	250
		1090445	M8	10,5	8,5	43,3	8,5	15,6	8,6	9,4	2	19	
		1090446	M10	10,5	8,5	43,3	10,5	15,6	8,6	9,4	2	19	
ONKA-6406	50	1090449	M8	12	10	51,2	8,5	17,8	10,5	11	2	22	150
		1090450	M10	12	10	51,2	10,5	17,8	10,5	11	2	22	
		1090451	M12	12	10	51,2	13	17,8	10,5	11	2	22	
		1090452	M14	12	10	51,2	14,5	17,8	10,5	11	2	22	
ONKA-6407	70	1090455	M8	14	11,5	55	8,5	20,4	10,5	11	2,9	24	100
		1090456	M10	14	11,5	55	10,5	20,4	10,5	11	2,9	24	
		1090457	M12	14	11,5	55	13	20,4	10,5	11	2,9	24	
		1090458	M14	14	11,5	55	14,5	20,4	10,5	11	2,9	24	
ONKA-6408	95	1090461	M8	16	13,5	59,6	8,5	23,7	10,5	11,5	2,6	27	75
		1090462	M10	16	13,5	59,6	10,5	23,7	10,5	11,5	2,6	27	
		1090463	M12	16	13,5	59,6	13	23,7	10,5	11,5	2,6	27	
		1090464	M14	16	13,5	59,6	14,5	23,7	10,5	11,5	2,6	27	
ONKA-6409	120	1090470	M10	18	15,5	70,6	10,5	27	13,6	13,4	2,6	32	50
		1090471	M12	18	15,5	70,6	13	27	13,6	13,4	2,6	32	
		1090472	M14	18	15,5	70,6	14,5	27	13,6	13,4	2,6	32	
		1090473	M16	18	15,5	70,6	17	27	13,6	13,4	2,6	32	
ONKA-6410	150	1090478	M10	20	16,5	77,6	10,5	29,4	17,6	16,4	3,4	30	40
		1090479	M12	20	16,5	77,6	13	29,4	17,6	16,4	3,4	30	
		1090480	M14	20	16,5	77,6	14,5	29,4	17,6	16,4	3,4	30	
		1090481	M16	20	16,5	77,6	17	29,4	17,6	16,4	3,4	30	
ONKA-6411	185	1090486	M10	22	18,5	85	10,5	32,4	17,6	17,4	3,5	35	30
		1090487	M12	22	18,5	85	13	32,4	17,6	17,4	3,5	35	
		1090488	M14	22	18,5	85	14,5	32,4	17,6	17,4	3,5	35	
		1090489	M16	22	18,5	85	17	32,4	17,6	17,4	3,5	35	
		1090491	M20	22	18,5	85	20,5	32,4	17,6	17,4	3,5	35	
ONKA-6412	240	1090495	M10	25,5	21,5	90	10,5	37,6	17,6	17,4	4	40	25
		1090496	M12	25,5	21,5	90	13	37,6	17,6	17,4	4	40	
		1090497	M14	25,5	21,5	90	14,5	37,6	17,6	17,4	4	40	
		1090498	M16	25,5	21,5	90	17	37,6	17,6	17,4	4	40	
		1090500	M20	25,5	21,5	90	20,5	37,6	17,6	17,4	4	40	

EXTRA LONG TYPE COPPER CABLE LUGS





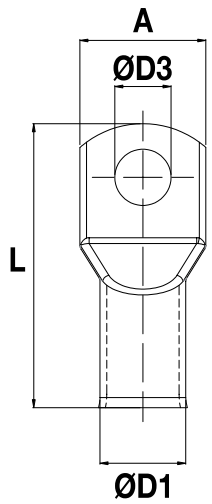

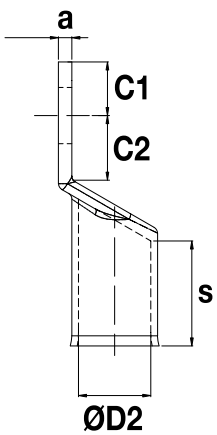



OLD CODE	CABLE CROSS SECTION (mm²)	NEW CODE	BOLT (Ø)	ØD1 (mm)	ØD2 (mm)	L (mm)	ØD3 (mm)	A (mm)	C1 (mm)	C2 (mm)	a (mm)	s (mm)	Pcs/Box
ONKA-6025	6	1090002	M5	5,5	4	25,7	5,5	7,9	6	5	1,5	11	1500
		1090003	M6	5,5	4	25,7	6,5	7,9	6	5	1,5	11	
ONKA-6026	10	1090005	M5	6,5	5	27,3	5,5	9,5	5,6	6,4	1,5	11	1000
		1090006	M6	6,5	5	27,3	6,5	9,5	5,6	6,4	1	11	
ONKA-6027	16	1090010	M6	7,8	5,8	29,7	6,5	11,2	5,6	6,4	2	13	600
		1090011	M8	7,8	5,8	33,5	8,5	14	7,8	6,8	1,5	13	
ONKA-6028	25	1090014	M6	9,5	7,2	40	6,5	13,5	7,3	8,3	2,3	17	300
		1090015	M8	9,5	7,2	40	8,5	13,5	7,3	8,3	2,3	17	
ONKA-6029	35	1090019	M6	10,8	8,5	43,3	6,5	15,7	8,6	9,4	2,3	18	250
		1090020	M8	10,8	8,5	43,3	8,5	15,7	8,6	9,4	2,3	18	
		1090021	M10	10,8	8,5	43,3	10,5	15,7	8,6	9,4	2,3	18	
ONKA-6030	50	1090024	M8	13	10	51,2	8,5	18,7	10,5	11	3	22	150
		1090025	M10	13	10	51,2	10,5	18,7	10,5	11	3	22	
		1090026	M12	13	10	51,2	13	18,7	10,5	11	3	22	
		1090027	M14	13	10	51,2	14,5	18,7	10,5	11	3	22	
ONKA-6031	70	1090030	M8	14,7	11,5	55	8,5	21,2	10,5	11	3,2	23	100
		1090031	M10	14,7	11,5	55	10,5	21,2	10,5	11	3,2	23	
		1090032	M12	14,7	11,5	55	13	21,2	10,5	11	3,2	23	
		1090033	M14	14,7	11,5	55	14,5	21,2	10,5	11	3,2	23	
ONKA-6032	95	1090036	M8	16,7	13,5	59,6	8,5	24,5	10,5	11,5	3,2	25	75
		1090037	M10	16,7	13,5	59,6	10,5	24,5	10,5	11,5	3,2	25	
		1090038	M12	16,7	13,5	59,6	13	24,5	10,5	11,5	3,2	25	
		1090039	M14	16,7	13,5	59,6	14,5	24,5	10,5	11,5	3,2	25	
ONKA-6033	120	1090045	M10	19	15,6	70,6	10,5	28	13,6	13,4	3,4	32	50
		1090046	M12	19	15,6	70,6	13	28	13,6	13,4	3,4	32	
		1090047	M14	19	15,6	70,6	14,5	28	13,6	13,4	3,4	32	
		1090048	M16	19	15,6	70,6	17	28	13,6	13,4	3,4	32	
ONKA-6034	150	1090053	M10	21	17	77,6	10,5	30,6	17,6	16,4	4	32	40
		1090054	M12	21	17	77,6	13	30,6	17,6	16,4	4	32	
		1090055	M14	21	17	77,6	14,5	30,6	17,6	16,4	4	32	
		1090056	M16	21	17	77,6	17	30,6	17,6	16,4	4	32	
ONKA-6035	185	1090061	M10	23	19	85	10,5	34	17,6	17,4	4	35	30
		1090062	M12	23	19	85	13	34	17,6	17,4	4	35	
		1090063	M14	23	19	85	14,5	34	17,6	17,4	4	35	
		1090064	M16	23	19	85	17	34	17,6	17,4	4	35	
		1090066	M20	23	19	85	20,5	34	17,6	17,4	4	35	
ONKA-6036	240	1090070	M10	26	21	90	10,5	37,8	17,6	17,4	5	35	25
		1090071	M12	26	21	90	13	37,8	17,6	17,4	5	35	
		1090072	M14	26	21	90	14,5	37,8	17,6	17,4	5	35	
		1090073	M16	26	21	90	17	37,8	17,6	17,4	5	35	
		1090075	M20	26	21	90	20,5	37,8	17,6	17,4	5	35	
ONKA-6037	300	1090078	M14	29	23,5	103	14,5	42	21,2	14,8	5,1	35	10
		1090079	M16	29	23,5	103	17	42	21,2	14,8	5,1	35	
		1090081	M20	29	23,5	103	20,5	42	21,2	14,8	5,1	35	
ONKA-6038	400	1090084	M14	32,8	27	125	14,5	47,5	24	16	5,8	36	10
		1090085	M16	32,8	27	125	17	47,5	24	16	5,8	36	
		1090087	M20	32,8	27	125	20,5	47,5	24	16	5,8	36	

DIN NORM COPPER CABLE LUGS




OLD CODE	CABLE CROSS SECTION (mm²)	NEW CODE	BOLT (Ø)	ØD1 (mm)	ØD2 (mm)	L (mm)	ØD3 (mm)	A (mm)	C1 (mm)	C2 (mm)	a (mm)	s (mm)	Pcs/Box
ONKA-6052	10	1090104	M5	6,5	5	34	5,5	9,5	7	8,5	1,5	13	800
ONKA-6053		1090105	M6	6,5	5	34	6,5	9,5	7	8,5	1,5	13	
ONKA-6054	16	1090109	M6	8,5	5,5	46	6,5	13	10	8	2	21	300
ONKA-6055		1090110	M8	8,5	5,5	46	8,5	13	10	10	2	21	
ONKA-6056		1090111	M10	8,5	5,5	46	10,5	13	10	12	2	21	
ONKA-6057	25	1090114	M6	10	7	48	6,5	16	10	8	3	21	250
ONKA-6058		1090115	M8	10	7	48	8,5	16	10	10	3	21	
ONKA-6059		1090116	M10	10	7	48	10,5	16	10	12	3	21	
ONKA-6106		1090117	M12	10	7	48	13	16	10	13	3	21	
ONKA-6061	35	1090121	M8	12,5	8,2	54	8,5	19	12	10	4,3	22	150
ONKA-6062		1090122	M10	12,5	8,2	54	10,5	19	12	12	4,3	22	
ONKA-6063		1090123	M12	12,5	8,2	54	13	19	12	13	4,3	22	
ONKA-6064	50	1090126	M8	14,5	10	64	8,5	21,5	12	10	4,5	31	75
ONKA-6065		1090127	M10	14,5	10	64	10,5	21,5	12	12	4,5	31	
ONKA-6066		1090128	M12	14,5	10	64	13	21,5	12	13	4,5	31	
ONKA-6067		1090130	M16	14,5	10	64	17	21,5	12	16	4,5	31	
ONKA-6068	70	1090133	M8	16,5	11,5	68	8,5	23,8	13	10	5	32	50
ONKA-6069		1090134	M10	16,5	11,5	68	10,5	23,8	13	12	5	32	
ONKA-6070		1090135	M12	16,5	11,5	68	13	23,8	13	13	5	32	
ONKA-6072		1090137	M16	16,5	11,5	68	17	23,8	13	16	5	32	
ONKA-6074	95	1090141	M10	19	13,5	78,5	10,5	27	14	12	5,5	40	40
ONKA-6075		1090142	M12	19	13,5	78,5	13	27	14	14	5,5	40	
ONKA-6077		1090144	M16	19	13,5	78,5	17	27	14	16	5,5	40	
ONKA-6078	120	1090149	M10	21	15,5	86	10,5	30	16,5	16	5,5	40	30
ONKA-6079		1090150	M12	21	15,5	86	13	30	16,5	16,5	5,5	40	
ONKA-6081		1090152	M16	21	15,5	86	17	30	16,5	20	5,5	40	
ONKA-6082		1090154	M20	21	15,5	86	20,5	30	16,5	22	5,5	40	
ONKA-6083	150	1090158	M10	23,5	17	94	10,5	34	16	16	6,5	40	25
ONKA-6084		1090159	M12	23,5	17	94	13	34	16	17	6,5	40	
ONKA-6086		1090161	M16	23,5	17	94	17	34	16	20	6,5	40	
ONKA-6087		1090163	M20	23,5	17	94	20,5	34	16	22	6,5	40	
ONKA-6088	185	1090167	M10	25,5	19	98	10,5	37	16	16	6,5	40	20
ONKA-6089		1090168	M12	25,5	19	98	13	37	16	17	6,5	40	
ONKA-6091		1090170	M16	25,5	19	98	17	37	16	20	6,5	40	
ONKA-6092		1090172	M20	25,5	19	98	20,5	37	16	22	6,5	40	
ONKA-6094	240	1090177	M12	29	21,5	108	13	42	16	17	7,5	55	15
ONKA-6096		1090179	M16	29	21,5	108	17	42	16	20	7,5	55	
ONKA-6097		1090181	M20	29	21,5	108	20,5	42	16	22	7,5	55	
ONKA-6098	300	1090184	M14	32	24,5	119	14,5	48	19	22	7,5	55	10
ONKA-6099		1090185	M16	32	24,5	119	17	48	19	22	7,5	55	
ONKA-6100		1090187	M20	32	24,5	119	20,5	48	19	22	7,5	55	
ONKA-6101	400	1090192	M14	38,5	27,5	140	14,5	55	19	22	11	60	10
ONKA-6102		1090193	M16	38,5	27,5	140	17	55	19	22	11	60	
ONKA-6103		1090195	M20	38,5	27,5	140	20,5	55	19	22	11	60	
ONKA-6104	500	1090203	M20	-	-	-	20,5	-	-	-	-	-	1
ONKA-6105	625	1090211	M20	-	-	-	20,5	-	-	-	-	-	1

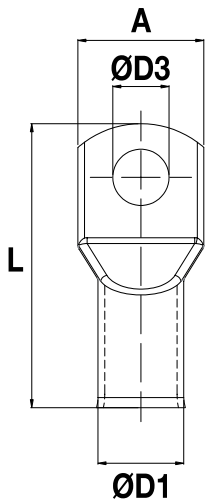

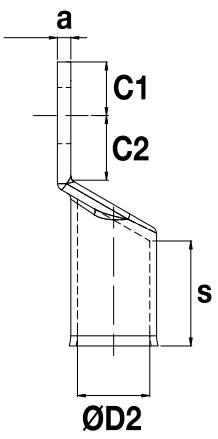

45⁰ COPPER CABLE LUGS




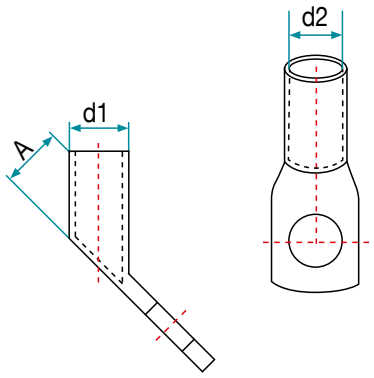

CODE	METRIC (Ø)	CABLE SECTION (mm²)	INT. DIA (d1) (mm)	EXT. DIA (d2) (mm)	CABLE L. (A)	Pcs/Box
ONKA-6304	M 5	6	4.00	5.50	9.50	800
ONKA-6305	M 5/6	10	4.50	6.00	11.50	500
ONKA-6306	M 6/8/10	16	5.50	7.50	12.50	300
ONKA-6307	M 8/10	25	7.00	9.50	15.50	200
ONKA-6308	M 8/10	35	8.50	11.00	17.00	125
ONKA-6309	M 10/12	50	10.00	13.00	18.50	80
ONKA-6310	M 10/12	70	11.50	14.50	22.00	60
ONKA-6311	M 10/12/14	95	13.50	16.50	24.00	40
ONKA-6312	M 10/12/14	120	14.50	18.00	27.00	30
ONKA-6313	M 10/12/16	150	16.50	21.00	29.00	25
ONKA-6314	M 10/12/16	185	18.50	23.00	32.00	20
ONKA-6315	M 10/12/16	240	21.00	26.00	37.00	15
ONKA-6316	M 12/16	300	23.50	28.50	39.00	8


90⁰ COPPER CABLE LUGS



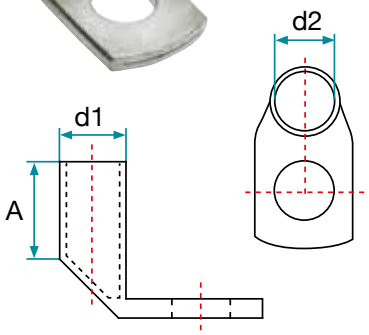

CODE	METRIC (Ø)	CABLE SECTION (mm²)	INT. DIA (d1) (mm)	EXT. DIA (d2) (mm)	CABLE L. (A)	Pcs/Box
ONKA-6319	M 5	6	4.00	5.50	9.50	800
ONKA-6320	M 5/6	10	4.50	6.00	11.50	500
ONKA-6321	M 6/8/10	16	5.50	7.50	12.50	300
ONKA-6322	M 8/10	25	7.00	9.50	15.50	200
ONKA-6323	M 8/10	35	8.50	11.00	17.00	150
ONKA-6324	M 10/12	50	10.00	13.00	18.50	80
ONKA-6325	M 10/12	70	11.50	14.50	22.00	60
ONKA-6326	M 10/12/14	95	13.50	16.50	24.00	50
ONKA-6327	M 10/12/14	120	14.50	18.00	27.00	30
ONKA-6328	M 10/12/16	150	16.50	21.00	29.00	25
ONKA-6329	M 10/12/16	185	18.50	23.00	32.00	20
ONKA-6330	M 10/12/16	240	21.00	26.00	37.00	15
ONKA-6331	M 12/16	300	23.50	28.50	39.00	8

ALUMINIUM CABLE LUGS






CODE	METRIC (ø)	SECTION	INT. DIA (d1) mm	EXT. DIA (d2) mm	CABLE L. (A)	LENGHT	PCS/BOX
ONKA-6290	M5	16	5.50	10.00	32.00	70.00	120
ONKA-6291	M5	25	7.00	12.00	34.00	75.00	90
ONKA-6292	M6	35	8.00	14.00	40.00	85.00	60
ONKA-6293	M8	50	10.00	16.00	42.00	90.00	50
ONKA-6294	M8	70	11.50	18.00	47.00	100.00	35
ONKA-6295	M10	95	13.50	21.00	50.00	112.00	30
ONKA-6296	M10	120	15.00	23.00	53.00	120.00	25
ONKA-6297	M12	150	16.50	25.00	55.00	128.00	15
ONKA-6298	M12	185	18.50	27.00	58.00	133.00	10
ONKA-6299	M12	240	21.00	30.00	60.00	140.00	8
ONKA-6300	M12	300	23.50	34.00	65.00	165.00	8


FORK TYPE COPPER CABLE LUGS










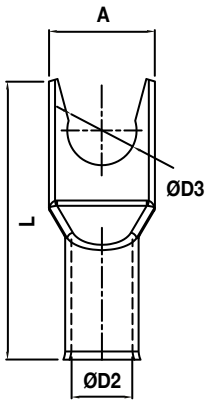


OLD CODE	CABLE CROSS SECTION (mm²)	NEW CODE	BOLT (Ø)	ØD1 (mm)	ØD2 (mm)	L (mm)	ØD3 (mm)	A (mm)	C1 (mm)	C2 (mm)	Pcs/Box
ONKA-6210	**10**	**1090331**	M5	6,5	5	25	5,5	9,5	5,5	6,5	1250
ONKA-6211	**16**	**1090332**	M6	7	5,5	27,5	6,5	10,5	5,5	6,5	750
ONKA-6212	**25**	**1090333**	M8	9	7,5	34	8,5	13	7	9	450
ONKA-6213	**35**	**1090334**	M8	10,5	8,5	39	8,5	15,5	8,5	9,5	300
ONKA-6214	**50**	**1090335**	M8	12	10	47	8,5	18	10	11,5	175

DIN NORM ALUMINIUM CABLE LUGS








OLD CODE	CABLE CROSS SECTION (mm²)	NEW CODE	BOLT (Ø)	ØD1 (mm)	ØD2 (mm)	L (mm)	ØD3 (mm)	A (mm)	C1 (mm)	C2 (mm)	Pcs/Box
ONKA-6122	**10**	**1090215**	M5	8	5	50	5,5	9	7	8,5	300
ONKA-6123	**16**	**1090221**	M8	10	6	53	8,4	13,7	10	10	200
ONKA-6124	**25**	**1090225**	M8	12	7	62	8,4	16	10	10	100
ONKA-6125	**35**	**1090231**	M10	14	8,2	70	10,5	19	12	12	75
ONKA-6126	**50**	**1090235**	M10	16	10	80	10,5	22	12	12	50
ONKA-6127	**70**	**1090241**	M10	18	12	90	10,5	24	12	12	40
ONKA-6128	**95**	**1090249**	M12	22	13,4	95	13	28	13	13	25
ONKA-6129	**120**	**1090257**	M12	23	15	110	13	32	16	17	20
ONKA-6130	**150**	**1090266**	M12	26	16,5	114	13	34	16	17	15
ONKA-6131	**185**	**1090272**	M12	28	18,5	125	13	37	16	17	10
ONKA-6132	**240**	**1090280**	M12	32	20	140	13	42	16	17	8

WELDED TYPE COPPER CABLE LUGS






DIN 46234 Standard Copper (Nickel Plated)

CODE	CROSS SECTION	METRIC DIMENSION (d2)	d_1	l_1	b	l_2	d_2	PCS/BOX
ONKA-102000	0.5 - 1 mm^2	M2.5	1.6	10.8	6.0	4.8	2,2	1000
ONKA-102002	0.5 - 1 mm^2	M3	1.6	10.8	6.0	4.8	3,2	1000
ONKA-102004	0.5 - 1 mm^2	M3.5	1.6	10.8	6.0	4.8	3,7	1000
ONKA-102006	0.5 - 1 mm^2	M4	1.6	11.8	8.0	4.8	4,3	1000
ONKA-102008	0.5 - 1 mm^2	M5	1.6	12.8	10.0	4.8	5,3	1000
ONKA-102010	0.5 - 1 mm^2	M6	1.6	14.8	11.0	4.8	6,5	1000
ONKA-102011	0.5 - 1 mm^2	M8	1.6	17.0	14.0	4.8	8,4	1000
ONKA-102012	1.5 - 2.5 mm^2	M3	2.3	10.8	6.0	4.8	3,2	1000
ONKA-102014	1.5 - 2.5 mm^2	M3.5	2.3	10.8	6.0	4.8	3,7	1000
ONKA-102016	1.5 - 2.5 mm^2	M4	2.3	11.8	8.0	4.8	4,3	1000
ONKA-102018	1.5 - 2.5 mm^2	M5	2.3	13.8	10.0	4.8	5,3	1000
ONKA-102020	1.5 - 2.5 mm^2	M6	2.3	15.8	11.0	4.8	6.5	1000
ONKA-102022	1.5 - 2.5 mm^2	M8	2.3	16.8	14.0	4.8	8.4	1000
ONKA-102023	1.5 - 2.5 mm^2	M10	2.3	17.0	15.0	4.8	10.5	1000
ONKA-102024	4 - 6 mm^2	M4	3.6	14.0	8.0	6.0	4,3	100
ONKA-102026	4 - 6 mm^2	M5	3.6	15.0	10.0	6.0	5,3	100
ONKA-102028	4 - 6 mm^2	M6	3.6	16.0	11.0	6.0	6.5	100
ONKA-102030	4 - 6 mm^2	M8	3.6	19.0	14.0	6.0	8.4	100
ONKA-102032	4 - 6 mm^2	M10	3.6	21.0	18.0	6.0	10.5	100
ONKA-102033	4 - 6 mm^2	M12	3.6	21.0	18.0	6.0	13.0	100
ONKA-102034	10 mm^2	M4	4.5	16.0	10.0	8.0	4,3	100
ONKA-102036	10 mm^2	M5	4.5	16.0	10.0	8.0	5,3	100
ONKA-102038	10 mm^2	M6	4.5	17.0	11.0	8.0	6.5	100
ONKA-102040	10 mm^2	M8	4.5	20.0	14.0	8.0	8.4	100
ONKA-102042	10 mm^2	M10	4.5	21.0	18.0	8.0	10.5	100
ONKA-102044	10 mm^2	M12	4.5	23.0	22.0	8.0	13.0	100
ONKA-102046	16 mm^2	M5	5.8	20.0	11.0	10.0	5,3	100
ONKA-102048	16 mm^2	M6	5.8	20.0	11.0	10.0	6.5	100
ONKA-102050	16 mm^2	M8	5.8	22.0	14.0	10.0	8.4	100
ONKA-102052	16 mm^2	M10	5.8	24.0	18.0	10.0	10.5	100
ONKA-102054	16 mm^2	M12	5.8	26.0	22.0	10.0	13.0	100
ONKA-102056	25 mm^2	M5	7.5	25.0	12.0	11.0	5,3	100
ONKA-102058	25 mm^2	M6	7.5	25.0	12.0	11.0	6.5	100
ONKA-102060	25 mm^2	M8	7.5	25.0	16.0	11.0	8.4	100
ONKA-102062	25 mm^2	M10	7.5	26.0	18.0	11.0	10.5	100
ONKA-102064	25 mm^2	M12	7.5	31.0	22.0	11.0	13.0	100
ONKA-102066	25 mm^2	M14	7.5	31.0	22.0	11.0	15.0	100
ONKA-102068	25 mm^2	M16	7.5	35.0	28.0	11.0	17.0	100
ONKA-102070	35 mm^2	M6	9.0	26.0	15.0	12.0	6.5	100
ONKA-102072	35 mm^2	M8	9.0	26.0	16.0	12.0	8.4	100
ONKA-102074	35 mm^2	M10	9.0	27.0	18.0	12.0	10.5	100
ONKA-102076	35 mm^2	M12	9.0	31.0	22.0	12.0	13.0	100
ONKA-102078	35 mm^2	M14	9.0	31.0	22.0	12.0	15.0	100
ONKA-102080	35 mm^2	M16	9.0	35.0	28.0	12.0	17.0	100
ONKA-102082	50 mm^2	M6	11.0	34.0	18.0	16.0	6.5	100
ONKA-102084	50 mm^2	M8	11.0	34.0	18.0	16.0	8.4	100
ONKA-102086	50 mm^2	M10	11.0	34.0	18.0	16.0	10.5	100
ONKA-102088	50 mm^2	M12	11.0	36.0	22.0	16.0	13.0	100
ONKA-102090	50 mm^2	M14	11.0	36.0	22.0	16.0	15.0	100
ONKA-102092	50 mm^2	M16	11.0	40.0	22.0	16.0	17.0	100
ONKA-102093	70 mm^2	M6	15.0	38.0	22.0	18.0	6.5	100
ONKA-102094	70 mm^2	M8	15.0	38.0	22.0	18.0	8.4	100
ONKA-102096	70 mm^2	M10	15.0	38.0	22.0	18.0	10.5	100
ONKA-102098	70 mm^2	M12	15.0	38.0	22.0	18.0	13.0	100
ONKA-102100	70 mm^2	M14	15.0	38.0	22.0	18.0	15.0	100
ONKA-102102	70 mm^2	M16	15.0	42.0	28.0	18.0	17.0	100
ONKA-102103	95 mm^2	M8	15.0	42.0	24.0	20.0	8.4	100
ONKA-102104	95 mm^2	M10	15.0	42.0	24.0	20.0	10.5	100
ONKA-102106	95 mm^2	M12	15.0	42.0	24.0	20.0	13.0	100
ONKA-102108	95 mm^2	M14	15.0	42.0	24.0	20.0	15.0	100
ONKA-102110	95 mm^2	M16	15.0	44.0	28.0	20.0	17.0	100
ONKA-102111	120 mm^2	M8	16.5	44.0	24.0	22.0	8.4	50
ONKA-102112	120 mm^2	M10	16.5	44.0	24.0	22.0	10.5	50
ONKA-102114	120 mm^2	M12	16.5	44.0	24.0	22.0	13.0	50
ONKA-102116	120 mm^2	M14	16.5	44.0	24.0	22.0	15.0	50
ONKA-102118	120 mm^2	M16	16.5	48.0	28.0	22.0	17.0	50
ONKA-102120	150 mm^2	M10	19.0	50.0	30.0	24.0	10.5	50
ONKA-102123	150 mm^2	M12	19.0	50.0	30.0	24.0	13.0	50
ONKA-102124	150 mm^2	M14	19.0	50.0	30.0	24.0	15.0	50
ONKA-102126	150 mm^2	M16	19.0	50.0	30.0	24.0	17.0	50
ONKA-102127	185 mm^2	M10	21.0	50.0	36.0	28.0	10.5	50
ONKA-102128	185 mm^2	M12	21.0	50.0	36.0	28.0	13.0	50
ONKA-102130	185 mm^2	M14	21.0	50.0	36.0	28.0	15.0	50
ONKA-102132	185 mm^2	M16	21.0	50.0	36.0	28.0	17.0	50
ONKA-102133	240 mm^2	M10	23.5	56.0	38.0	32.0	10.5	50
ONKA-102134	240 mm^2	M12	23.5	56.0	38.0	32.0	13.0	50
ONKA-102136	240 mm^2	M14	23.5	56.0	38.0	32.0	15.0	50
ONKA-102138	240 mm^2	M16	23.5	56.0	38.0	32.0	17.0	50

STANDARD COPPER BUTT CONNECTORS

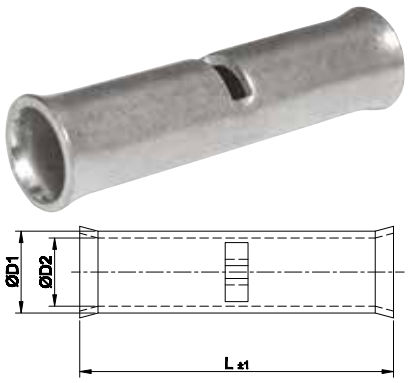


NEW CODE	OLD CODE	REF. NR.	CABLE CROSS SECTION	ØD1	ØD2	L	PCS/BOX
1090288	ONKA - 6141	SEM-10	10 mm²	6.5	5	25,5	750
1090289	ONKA - 6142	SEM-16	16 mm²	7	5.5	28	500
1090290	ONKA - 6143	SEM-25	25 mm²	9	7.5	34,5	300
1090291	ONKA - 6144	SEM-35	35 mm²	10.5	8.5	39,5	300
1090292	ONKA - 6145	SEM-50	50 mm²	12	10	47,5	150
1090293	ONKA - 6146	SEM-70	70 mm²	14	11.5	49,5	100
1090294	ONKA - 6147	SEM-95	95 mm²	16	13.5	53,5	75
1090295	ONKA - 6148	SEM-120	120 mm²	18	15.5	64	50
1090296	ONKA - 6149	SEM-150	150 mm²	20	16.5	70	35
1090297	ONKA - 6150	SEM-185	185 mm²	22	18.5	75	25
1090298	ONKA - 6151	SEM-240	240 mm²	25.5	21.5	83,5	15

EXTRA LONG TYPE COPPER BUTT CONNECTORS




NEW CODE	OLD CODE	REF. NR.	CABLE CROSS SECTION	ØD1	ØD2	L	PCS/BOX
1090299	ONKA - 6160	SEM-6	6 mm²	5,5	4	26,5	1000
1090300	ONKA - 6161	SEM-10	10 mm²	6,5	5	28	750
1090301	ONKA - 6162	SEM-16	16 mm²	7,8	5,8	30,5	500
1090302	ONKA - 6163	SEM-25	25 mm²	9,5	7,2	40,5	400
1090303	ONKA - 6164	SEM-35	35 mm²	10,8	8,5	44	250
1090304	ONKA - 6165	SEM-50	50 mm²	13	10	50	150
1090305	ONKA - 6166	SEM-70	70 mm²	14,7	11,5	55,5	100
1090306	ONKA - 6167	SEM-95	95 mm²	16,7	13,5	59,5	75
1090307	ONKA - 6168	SEM-120	120 mm²	19	15,6	65	50
1090308	ONKA - 6169	SEM-150	150 mm²	21	17	70	35
1090309	ONKA - 6170	SEM-185	185 mm²	23	19	75	25
1090310	ONKA - 6171	SEM-240	240 mm²	26	21	85	20
1090311	ONKA - 6172	SEM-300	300 mm²	28,6	23,5	100	15
1090312	ONKA - 6173	SEM-400	400 mm²	32,8	27	110	10
1090313	ONKA - 6174	SEM-500	500 mm²	-	-	-	10
1090314	ONKA - 6175	SEM-600	600 mm²	-	-	-	10

DIN NORM COPPER BUTT CONNECTORS 46235 TYPE

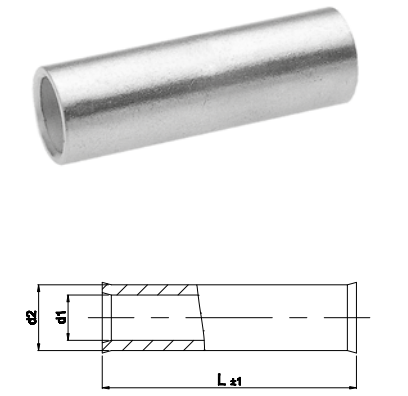


NEW CODE	OLD CODE	REF. NR.	CABLE CROSS SECTION	Ød1	Ød2	L	PCS/BOX
1090316	ONKA - 6181	SEM-10	10 mm²	6,5	5	30	400
1090317	ONKA - 6182	SEM-16	16 mm²	8,5	5,5	50	250
1090318	ONKA - 6183	SEM-25	25 mm²	10	7	50	125
1090319	ONKA - 6184	SEM-35	35 mm²	12,5	8,2	50	100
1090320	ONKA - 6185	SEM-50	50 mm²	14,5	10	56	100
1090321	ONKA - 6186	SEM-70	70 mm²	16,5	11,5	56	50
1090322	ONKA - 6187	SEM-95	95 mm²	19	13,5	70	40
1090323	ONKA - 6188	SEM-120	120 mm²	21	15,5	70	30
1090324	ONKA - 6189	SEM-150	150 mm²	23,5	17	80	20
1090325	ONKA - 6190	SEM-185	185 mm²	25,5	19	85	10
1090326	ONKA - 6191	SEM-240	240 mm²	29	21,5	90	10
1090327	ONKA - 6192	SEM-300	300 mm²	32	24,5	100	10
1090328	ONKA - 6193	SEM-400	400 mm²	38,5	27,5	150	10
1090329	ONKA - 6194	SEM-500	500 mm²	-	-	-	10
1090330	ONKA - 6195	SEM-625	625 mm²	-	-	-	10

DIN NORM ALUMINIUM COPPER BUTT CONNECTORS

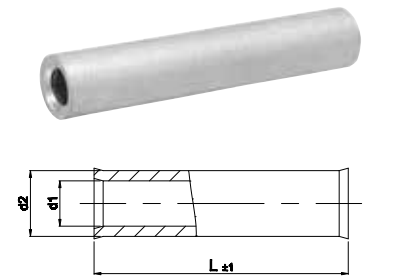

NEW CODE	OLD CODE	CABLE CROSS SECTION	Ød1	Ød2	L	PCS/BOX
1090422	ONKA - 6270	DEM-10 mm²	8	5	52	300
1090423	ONKA - 6271	DEM-16 mm²	10	6	55	250
1090424	ONKA - 6272	DEM-25 mm²	12	7	64	150
1090425	ONKA - 6273	DEM-35 mm²	14	8,2	72	75
1090426	ONKA - 6274	DEM-50 mm²	16	10	82	50
1090427	ONKA - 6275	DEM-70 mm²	18	12	92	35
1090428	ONKA - 6276	DEM-95 mm²	22	13,4	97	20
1090429	ONKA - 6277	DEM-120 mm²	23	15	112	15
1090430	ONKA - 6278	DEM-150 mm²	26	16,5	116	8
1090431	ONKA - 6279	DEM-185 mm²	28	18,5	127	7
1090432	ONKA - 6280	DEM-240 mm²	32	20	142	5

BIMETAL (AL-CU) CABLE LUGS








CODE	REF. NR.	CABLE CROSS SECTION	ØE	ØI	L	ØT	L1	PCS/ BOX
ONKA-6108	TBF-16	16 mm²	20	6,5	84	12,8	46	80
ONKA-6109	TBF-25	25 mm²	20	6,5	84	12,8	46	80
ONKA-6110	TBF-35	35 mm²	20	8	84	12,8	46	80
ONKA-6111	TBF-50	50 mm²	20	9	84	12,8	46	60
ONKA-6112	TBF-70	70 mm²	20	11	84	12,8	46	60
ONKA-6113	TBF-95	95 mm²	20	12,5	84	12,8	46	60
ONKA-6114	TBF-120	120 mm²	25	13,7	107	12,8	62,5	30
ONKA-6115	TBF-150	150 mm²	25	15,5	107	12,8	62,5	30
ONKA-6116	TBF-185	185 mm²	32	17	117	14,5	64	15
ONKA-6117	TBF-240	240 mm²	32	19,5	117	14,5	64	15
ONKA-6118	TBF-300	300 mm²	36	23,3	157	16,3	90	9
ONKA-6119	TBF-400	400 mm²	36	26	157	16,3	90	9

BIMETAL (AL-CU) LONG TYPE CABLE LUGS

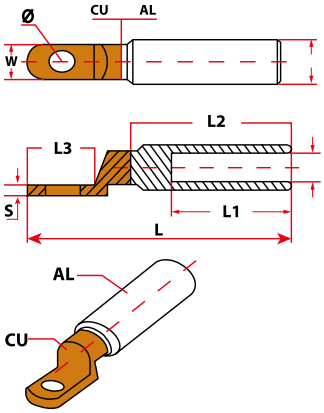




CODE	REF. NR	CABLE CROSS SECTION	D	d	L±1	L1	L2	L3	W	Q	S	PCS/ BOX
ONKA - 6510	CAL-M16	16 mm²	16	5,5	82	38	50	23	14,0	8,5	3,2	80
ONKA - 6511	CAL-M25	25 mm²	16	6,5	82	38	50	23	14,0	8,5	3,2	80
ONKA - 6512	CAL-M35	35 mm²	16	8,2	82	38	50	23	14,0	8,5	3,2	80
ONKA - 6513	CAL-M50	50 mm²	20	9,7	94	43	55	27	16,0	8,5	5,2	60
ONKA - 6514	CAL-M70	70 mm²	20	11	94	43	55	27	16,0	8,5	5,2	60
ONKA - 6515	CAL-M95	95 mm²	20	12,5	94	43	55	27	16,0	8,5	5,2	60
ONKA - 6516	CAL-M120	120 mm²	25	14,5	120	60	72	32	23,0	10,5	6,5	30
ONKA - 6517	CAL-M150	150 mm²	25	16,5	120	60	72	32	23,0	10,5	6,5	30
ONKA - 6518	CAL-M185	185 mm²	32	17,5	133	60	73	38	23,0	12,5	8	15
ONKA - 6519	CAL-M240	240 mm²	32	19,5	133	60	73	38	29,0	12,5	8	15
ONKA - 6520	CAL-M300	300 mm²	34	23	133	61	73	35	29,0	12,5	8,5	10
ONKA - 6521	CAL-M400	400 mm²	40	26,2	163	93	105	35	29,0	12,5	10,5	10
ONKA - 6522	CAL-M500	500 mm²	40	29	163	93	105	35	29,0	12,5	10,5	10

ALUMINIUM COPPER BUTT CONNECTORS (PINS)




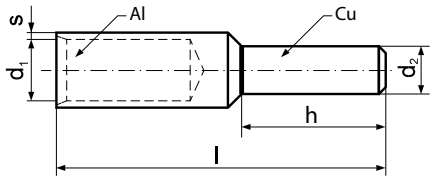

CODE	CABLE CROSS SECTION		ØD1	ØD2	L		PCS/ BOX
	Multi Core Cable	Single Core Cable	D1	D2	l	h	
ONKA - 6333	10	16	12	5	58	15	100
ONKA - 6334	16	25	12	6	58	15	100
ONKA - 6335	25	35	6.8	6	58	20	50
ONKA - 6336	35	50	8.0	7	71	22	50
ONKA - 6337	50	70	9.8	8	74	25	80
ONKA - 6338	70	95	11.2	10	87	30	70
ONKA - 6339	95	120	13.2	12	91	33	48
ONKA - 6340	120	150	14.7	12	97	38	35
ONKA - 6341	150	185	16.3	12	108	38	30
ONKA - 6342	185	240	18.3	14	116	44	24
ONKA - 6343	240	300	21.0	16	128	44	16
ONKA - 6344	300	–	23.3	18	131	46	9

ALUMINIUM COPPER BUTT CONNECTORS




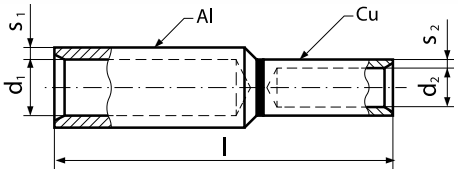

CODE	AL CABLE SEC.	CU CABLE SEC.	d1	d2	l	PCS/ BOX
ONKA - 6350	25 mm²	10 mm²	5.3	7.3	80.0	90
ONKA - 6351	35 mm²	16 mm²	8.0	5.5	71.0	90
ONKA - 6352	50 mm²	25 mm²	9.8	5.5	71.5	80
ONKA - 6353	70 mm²	35 mm²	11.2	5.5	79.0	70
ONKA - 6354	95 mm²	50 mm²	13.2	5.5	79.0	42
ONKA - 6355	120 mm²	70 mm²	14.7	5.5	87.0	35
ONKA - 6356	150 mm²	95 mm²	16.3	5.5	93.3	30
ONKA - 6357	185 mm²	120 mm²	18.3	10.0	108.0	24
ONKA - 6358	240 mm²	150 mm²	21.0	10.0	116.0	16

KJB TYPE BIMETAL (AL-CU)



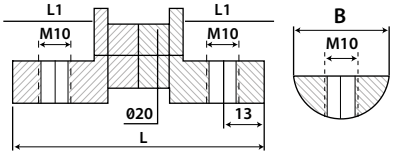

CODE	L (mm)	L1 (mm)	B (mm)	BOLT DIAMETER	PCS.
ONKA - 6530	80	26	26	M 10	24
ONKA - 6531	80	26	29	M 10	24

BIMETAL MECHANICAL CLAMP CABLE LUGS



CODE	C. SECTION	EXTERNAL DIAMETER	NUMBER OF SCREWS	WRENCH	PCS.
BMSKP 35-150-12/2	35 - 150	28	2	17	80
BMSKP 70-240-12/2	70 -240	33	2	19	40
BMSKP 120-300-12/2	120-300	38	2	22	36
BMSKP 185-400-16/2	185 -400	42	2	22	28

BIMETAL MECHANICAL CLAMP CABLE LUGS (ALUMINIUM)



CODE	C. SECTION	EXTERNAL DIAMETER	NUMBER OF SCREWS	WRENCH	PCS.
MSKP 35-150-12/2	35 - 150	28	2	17	80
MSKP 70-240-12/2	70 -240	33	2	19	40
MSKP 120-300-16/2	120-300	38	2	22	36
MSKP 185-400-16/2	185 -400	42	2	22	28


MECHANICAL CLAMP BUTT CONNECTORS



CODE	C. SECTION	EXTERNAL DIAMETER	NUMBER OF SCREWS	WRENCH	PCS.
MSEM 35-150/4	35 - 150	28	4	17	20
MSEM 70-240/4	70 -240	33	4	19	15
MSEM 120-300/4	120-300	38	4	22	10
MSEM 185-400/4	185 -400	42	4	22	9
MSEM 500-630/6	400-630	52	6	24	4





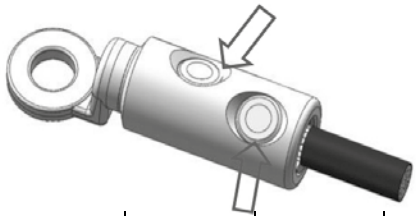

CODE	Al Circle Conductor	Al Slice Conductor	Cu Circle Conductor	Cu Slice Conductor	Strip Length	Additional Diameter Enlarger	Additional Part	Bolt Diameter	Wrench
SKP 35-150-12/2	35-150	35-150	35-120	35-150	35-120	41	35-70	95-150	17
SKP 70-240-12//2	70-240	70-240	70-185	70-240	70-185	64	70-120	150-240	19
SKP 120-300-16/2	120-300	120-300	120-240	120-300	120-240	71	120-185	240-300	22
SKP 185-400-16/2	185-400	185-400	185-300	185-400	185-300	81	185-240	300-400	22









CURRENT TRANSFORMERS

Technical Features ;

- *Wide Range of primary/secondary current with high accuracy options.*
- *Compacted sizes available for narrow spaces and lower cost*
- *Various mounting options available: DIN rail adapter for easy mounting or steel feet for stronger fixing*
- *Terminals: Integral terminal cover, high cross section brass terminal for extra safety*
- *Case Material : Flame retardant , self-extinguishing ABS*
- *Customized product can be provided*

CURRENT TRANSFORMERS

Range of Products;

- *Primary Current: 5A-4000A, Secondary Current: 1A or 5A*
- *Accuracy Class: 5, 3, 1, 0.5, 0.5S, 0.2 and 0.2S classes available*
- *Hole Size: Bus bar until 125mm, Round Counductor until Ø 85 mm*
- *Burden: 1VA - 40VA*

Certificates: TSE and CE
Standards: IEC 60044-1, IEC 61869-2, VDE 0414-1, DIN57414, BS3938, BS7626, EN 61869-2

Current Transformer Coding Map

XX-XXX-XXXX-X-X-XX


SERIES CODE	HOLE SIZE (mm)	PRIMARY (A)	SECONDARY (A)
CK	20	40	1
TK	30S	.	5
DK	30	.	
BK	40	.	
	60	5000	
	80		
	100		
	125		

CLASS	
CODE	CLASS
1	1
2	0.5
3	0.5S
4	0.1
5	0.1S
6	0.2
7	0.2S
8	5
9	3

BURDEN (VA)	
CODE V	A
01	1
02	1.5
03	2.5
04	3.75
05	5
06	7.5
07	10
08	12.5
09	15
10	20
11	25
12	30
13	40
14	50
15	60

CK20 SERIES CURRENT TRANSFORMER


PRIMARY CURRENT	CLASS 1.0		CLASS 0.5	
	CODE	BURDEN (VA)	CODE	BURDEN (VA)
40	CK20405901	1 (CL.3)	-	-
50	CK20505901	1 (CL.3)	-	-
60	CK20605101	1	-	-
75	CK20755102	1,5	-	-
80	CK20805102	1,5	-	-
100	CK201005102	1,5	CK201005202	1,5
125	CK201255103	2,5	CK201255202	1,5
150	CK201505103	2,5	CK201505202	1,5
160	CK201605103	2,5	CK201605202	1,5
200	CK202005103	2,5	-	
250	CK202505103	2,5	-	
300	CK203005103	2,5	-	

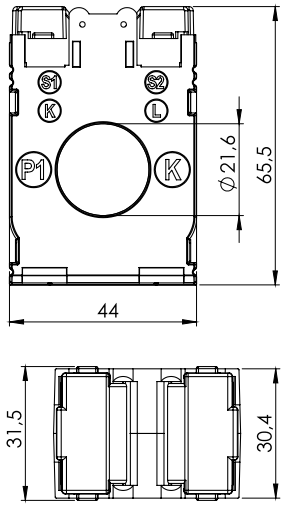



TK30S SERIES CURRENT TRANSFORMER


PRIMARY CURRENT	CLASS 1.0		CLASS 0.5	
	CODE	BURDEN (VA)	CODE	BURDEN (VA)
40	TK30S405802	1.5 (CL.5)	-	-
50	TK30S505802	1.5 (CL.5)	-	-
60	TK30S605902	1.5 (CL.3)	-	-
80	TK30S805101	1	-	-
100	TK30S1005102	1,5	-	-
125	TK30S1255102	1,5	-	1,5
150	TK30S1505103	2,5	TK30S1505203	1,5
160	TK30S1605103	2,5	TK30S1605203	1,5
200	TK30S2005103	2,5	TK30S2005203	1,5
250	TK30S2505103	2,5	TK30S2505203	
300	TK30S3005104	2,5	TK30S3005203	
400	TK30S4005104	3,75	TK30S4005203	
500	TK30S5005104	3,75	TK30S5005203	
600	TK30S6005105	5	TK30S6005204	

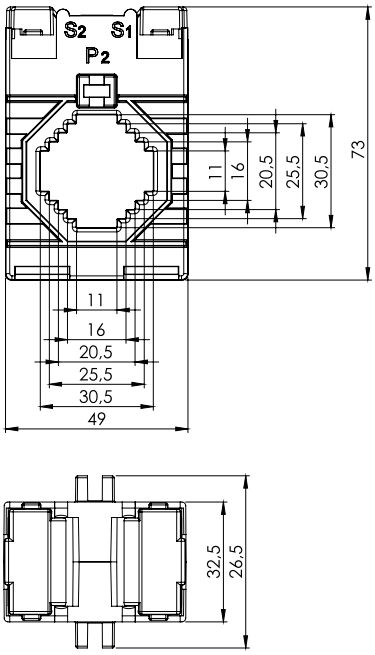



TK40 SERIES CURRENT TRANSFORMER


PRIMARY CURRENT	CLASS 1.0		CLASS 0.5		CLASS 0.5S	
	CODE	BURDEN (VA)	CODE	BURDEN (VA)	CODE	BURDEN (VA)
200	TK402005103	2,5	TK402005203	2,5	-	-
250	TK402505103	2,5	TK402505203	2,5	-	-
300	TK403005104	3,75	TK403005203	2,5	TK403005302	1.5
400	TK404005105	5	TK404005205	5	TK404005303	2.5
500	TK405005106	7,5	TK405005206	5	TK405005306	7,5
600	TK406005106	7,5	TK406005206	7,5	TK406005306	7,5
800	TK408005107	10	TK408005207	10	TK408005307	10

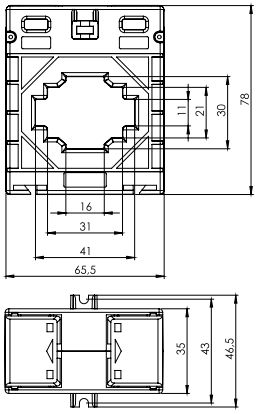



TK30 SERIES CURRENT TRANSFORMER


PRIMARY CURRENT	CLASS 1.0		CLASS 0.5		CLASS 0.5S	
	CODE	BURDEN (VA)	CODE	BURDEN (VA)	CODE	BURDEN (VA)
60	TK30605903	2.5 (CL.3)	-	-	-	-
80	TK30805102	1,5	-	-	-	-
100	TK301005102	1,5	TK301005202	-	-	-
125	TK301255103	2,5	TK301255203	-	-	-
150	TK301505103	2,5	TK301505203	2,5	TK301505301	1
160	TK301605103	2,5	TK301605203	2,5	TK301605302	1.5
200	TK302005104	3,75	TK302005204	3,75	TK302005302	1.5
250	TK302505105	5	TK302505205	5	TK302505303	2.5
300	TK303005105	5	TK303005205	5	TK303005304	3.75
400	TK304005105	5	TK304005205	5	TK304005305	5
500	TK305005106	7,5	TK305005206	7,5	TK305005306	7,5
600	TK306005107	10	TK306005207	10	TK306005307	10

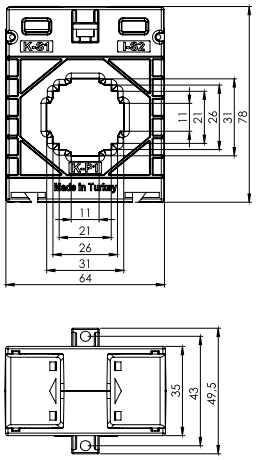



TK60 SERIES CURRENT TRANSFORMER


PRIMARY CURRENT	CLASS 1.0		CLASS 0.5		CLASS 0.5S	
	CODE	BURDEN (VA)	CODE	BURDEN (VA)	CODE	BURDEN (VA)
600	TK606005108	12,5	TK606005206	7,5	TK606005304	3,75
800	TK608005109	15	TK608005209	15	TK608005307	10
1000	TK6010005111	25	TK6010005211	25	TK6010005310	20
1200	TK6012005111	25	TK6012005211	25	TK6012005310	20
1250	TK6012505112	30	TK6012505211	25	TK6012505310	20
1500	TK6015005112	30	TK6015005212	30	TK6015005312	30

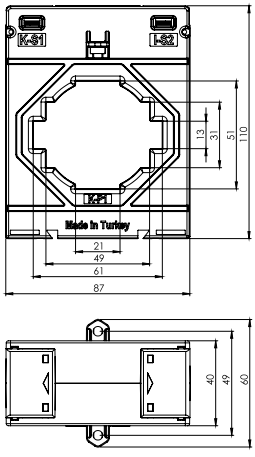



TK80 SERIES CURRENT TRANSFORMER


PRIMARY CURRENT	CLASS 1.0		CLASS 0.5		CLASS 0.5S	
	CODE	BURDEN (VA)	CODE	BURDEN (VA)	CODE	BURDEN (VA)
800	TK808005110	20	TK808005209	15	TK808005309	15
1000	TK8010005110	20	TK8010005209	15	TK8010005309	15
1200	TK8012005110	20	TK8012005210	20	TK8012005309	15
1250	TK8012505111	25	TK8012505211	25	TK8012505310	20
1500	TK8015005111	25	TK8015005211	25	TK8015005311	25
1600	TK8016005111	25	TK8016005211	25	TK8016005311	25
2000	TK8020005112	30	TK8020005211	25	TK8020005311	25

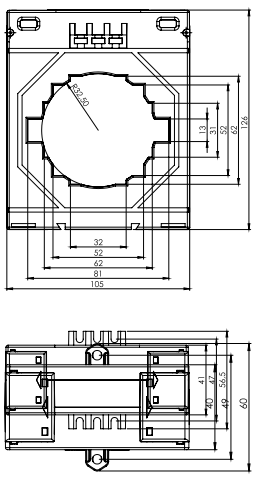



TK100 SERIES CURRENT TRANSFORMER


PRIMARY CURRENT	CLASS 1.0		CLASS 0.5		CLASS 0.5S	
	CODE	BURDEN (VA)	CODE	BURDEN (VA)	CODE	BURDEN (VA)
1000	TK10010005110	20	TK10010005209	15	TK10010005305	5
1200	TK10012005112	30	TK10012005211	25	TK10012005307	10
1250	TK10012505112	30	TK10012505211	25	TK10012505309	15
1500	TK10015005112	30	TK10015005211	25	TK10015005310	20
1600	TK10016005112	30	TK10016005211	25	TK10016005311	25
2000	TK10020005112	30	TK10020005212	30	TK10020005312	30
2500	TK10025005113	40	TK10025005213	40	TK10025005313	40
3000	TK10030005113	40	TK10030005213	40	TK10030005313	40
3200	TK10032005113	40	TK10032005213	40	TK10032005313	40
4000	TK10040005113	40	TK10040005213	40	TK10040005313	40

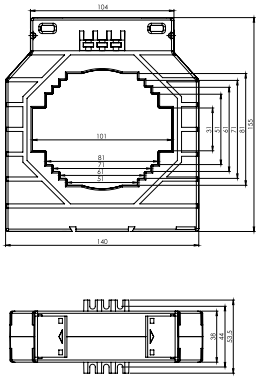



DK125 SERIES CURRENT TRANSFORMER

PRIMARY CURRENT	CLASS 1.0		CLASS 0.5		CLASS 0.5S	
	CODE	BURDEN (VA)	CODE	BURDEN (VA)	CODE	BURDEN (VA)
1200	DK12512005111	25	DK12512005211	25	DK12512005311	25
1250	DK12512505111	25	DK12512505211	25	DK12512505311	25
1500	DK12515005112	30	DK12515005212	30	DK12515005311	25
1600	DK12516005112	30	DK12516005212	30	DK12516005312	30
2000	DK12520005112	30	DK12520005212	30	DK12520005312	30
2500	DK12525005112	30	DK12525005212	30	DK12525005312	30
3000	DK12530005113	40	DK12530005213	40	DK12530005313	40
3200	DK12532005113	40	DK12532005213	40	DK12532005313	40
4000	DK12540005113	40	DK12540005213	40	DK12540005313	40

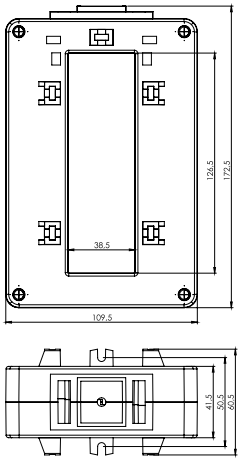



BK SERIES CURRENT TRANSFORMER

PRIMARY CURRENT	CLASS 0.5		CLASS 0.5S	
	CODE BURDEN 5VA	CODE BURDEN 10VA	CODE BURDEN 5VA	CODE BURDEN 10VA
5	BK55205	BK55207	BK55305	BK55307
10	BK105205	BK105207	BK105305	BK105307
15	BK155205	BK155207	BK155305	BK155307
20	BK205205	BK205207	BK205305	BK205307
25	BK255205	BK255207	BK255305	BK255307
30	BK305205	BK305207	BK305305	BK305307
40	BK405205	BK405207	BK405305	BK405307
50	BK505205	BK505207	BK505305	BK505307
60	BK605205	BK605207	BK605305	BK605307
75	BK755205	BK755207	BK755305	BK755307
80	BK805205	BK805207	BK805305	BK805307
100	BK1005205	BK1005207	BK1005305	BK1005307
125	BK1255205	BK1255207	BK1255305	BK1255307
150	BK1505205	BK1505207	BK1505305	BK1505307
200	BK2005205	BK2005207	BK2005305	BK2005307











INSULATORS

FIBER GLASS SUPPORT INSULATORS

Technical Features ;

- *Fiber glass reinforced polyester, has 18% of fibers*
- *Standart colour, Irox Red 130 (another colour cam used in needed)*
- *Steel Nuts- zinc lined. (Brass material can used if needed)*
- *Bolt Cr3 8.8 steel bolt*

PLASTIC BUSBAR SUPPORT INSULATOR (V0)

Technical Features ;

- *Low tension post insulators is made of none-flammable (V0) material*
- *It is used for the same purpose as BMC insulators*
- *It is more flaxible than BMC insulators due to refraction rate is low*
- *Fiber glass rainforced polyamide (PA6) none flamable, has 30% of fibers*
- *Standart colour black*
- *Nuts Steel - zinc lined. (Brass material can used if needed)*
- *Bolt Cr3 8.8 steel bolt*

FIBER GLASS PLATE

Technical Features ;

- *These products are hand - made in the form of plate*
- *Products have more machanical strenght than BMC products*
- *It can be made between 3 mm - 30 mm thickness*
- *Standart colour RAL 7035*

INDOOR TYPE ISOLATOR







CODE	TYPE	METRIC	DESCRIPTION	VOLTAGE (~kV)	PCS/BOX
PLSM1001	1N0-S	5	Two Ways Plastic Stud Isolator Non- Flame Plastic (V0) Isolator	0.6	500
PLSM1002	1N1-S	6		0.6	300
PLSM1003	1NMS-1	8		1	100
PLSM1004	1NMS-2	10		1	100
PLSM1013	1NMS-3	8		1	100
PLSM1014	1NMS-4	10		1	100
PLSM1005	1N0-K	5	Stud + Acorn Nut Non- Flame Plastic (V0) Isolator	0.6	500
PLSM1006	1N1-K	6		0.6	300
PLSM1007	1NMK-3	8		1	100
PLSM1008	1NMK-2	10		1	100
PLSM1015	1NMK-5	8		1	100
PLSM1016	1NMK-6	10		1	100
PLSM1009	1N0-KK	5	Two Ways Acorn Nut Non- Flame Plastic (V0) Isolator	0.6	500
PLSM1010	1N1-KK	6		0.6	300
PLSM1011	1NMK-4	8		1	100
PLSM1012	1NMK-1	10		1	100
PLSM1017	1NMK-7	8		1	100
PLSM1018	1NMK-8	10		1	100

INTERNAL TYPE LV ISOLATOR (NON-FLAME PLASTIC)



CODE	TYPE	DESCRIPTION	PCS/BOX
PLST1001	3x1F/5-10 mm	Non- Flame Plastic (V0) Comb Isolator	30



CODE	TYPE	DESCRIPTION	PCS/BOX
PLST1002	3x2F/10 mm	Non- Flame Plastic (V0) Comb Isolator	50



CODE	TYPE	DESCRIPTION	PCS/BOX
PLST1003	3x1F+N /5-10 mm	Non- Flame Plastic (V0) Comb Isolator	30



PLST1012

1x2F 10 mm COMB ISOLATOR

CODE	TYPE	DESCRIPTION	PCS/BOX
PLST1012	1x2F -1x3F/10 m	Non- Flame Plastic (V0) Comb Isolator	100



PLST1006

1x4F10 mm COMB ISOLATOR

CODE	TYPE	DESCRIPTION	PCS/BOX
PLST1006	1x4F/10 mm	Non- Flame Plastic (V0) Comb Isolator	100

PLST1013



ISOLATOR

CODE	TYPE	DESCRIPTION	PCS/BOX
PLST1013	20x3/20x4/30x5/30x10	Panel to Panel Isolators	100
PLST1014	20x5/20x10/40x10/50x10	Panel to Panel Isolators	100

INDOOR TYPE ISOLATOR

PLST1007



1x2F 10 mm COMB ISOLATOR

CODE	TYPE	DESCRIPTION	PCS/BOX
PLST1007	1x2F/10 mm	Non- Flame Plastic (V0) Comb Isolator	100

CODE	TYPE	Used Isolator Pcs.	Used Profil Length	PCS/BOX
PLST1307	1x2F/10 mm 3 Phase	6	225 mm	1
PLST1407	1x2F/10 mm 3 Phase+ N	8	300 mm	1

PLST1008



1x3F 10 mm COMB ISOLATOR

CODE	TYPE	DESCRIPTION	PCS/BOX
PLST1008	1x3F/10 mm	Non- Flame Plastic (V0) Comb Isolator	100

CODE	TYPE	Used Isolator Pcs.	Used Profil Length	PCS/BOX
PLST1308	1x3F/10 mm 3 Phase	6	575 mm	1
PLST1408	1x3F/10 mm 3 Phase+ N	8	675 mm	1

PLST1011



1x3F 5 mm COMB ISOLATOR

CODE	TYPE	DESCRIPTION	PCS/BOX
PLST1011	1x3F/5 mm	Non- Flame Plastic (V0) Comb Isolator	100

CODE	TYPE	Used Isolator Pcs.	Used Profil Length	PCS/BOX
PLST1311	1x3F/5 mm 3 Phase	6	225 mm	1
PLST1411	1x3F/5 mm 3 Phase+ N	8	300 mm	1

PLST1005



1x4F 5 mm COMB ISOLATOR

CODE	TYPE	DESCRIPTION	PCS/BOX
PLST1005	1x4F/5 mm	Non- Flame Plastic (V0) Comb Isolator	100

CODE	TYPE	Used Isolator Pcs.	Used Profil Length	PCS/BOX
PLST1305	1x4F/5 mm 3 Phase	6	225 mm	1
PLST1405	1x4F/5 mm 3 Phase+ N	8	300 mm	1





CODE	TYPE	Used Isolator Pcs.	Used Profil Length	PCS/BOX
PLST1306	1x4F/10 mm 3 Phase	6	575 mm	1
PLST1406	1x4F/10 mm 3 Phase+ N	8	675 mm	1

PLST1009



1x4F 10 mm COMB ISOLATOR (Screwed Flat Base)

CODE	TYPE	DESCRIPTION	PCS/BOX
PLST1009	1x4F/10 mm	Non- Flame Plastic (V0) Comb Isolator - Flat Type	100

PLST1010



1x3F 10 mm COMB ISOLATOR

CODE	TYPE	DESCRIPTION	PCS/BOX
PLST1010	1x3F/10 mm	Non- Flame Plastic (V0) Comb Isolator	100



CODE	TYPE	Used Isolator Pcs.	Used Profil Length	PCS/BOX
PLST1310	1x3F/10 mm 3 Phase	6	575 mm	1
PLST1410	1x3F/10 mm 3 Phase+ N	8	675 mm	1

LV SUPPORT ISOLATOR (RAINFORCED)



CODE	TYPE	DESCRIPTIONS	VOLTAGE (~kV)	PCS/BOX
POLM1001	1N0-S M5	Two ways Stud Isolator Glass Rainforced Polyamide AG Support Isolator	0.6	500
POLM1002	1N1-S M6		0.6	300
POLM1003	1NMS-1 M8		1	100
POLM1004	1NMS-2 M10		1	100



POLM1005	1N-K M5	Stud & Acorn Nut Glass Rainforced Polyamide AG Support Isolator	0.6	500
POLM1006	1N1-K M6		0.6	300
POLM1007	1NMK-1 M8		1	100
POLM1008	1NMK-2 M10		1	100



POLM1009	1NO-KK M5	Two ways Acorn Nut Glass Rainforced Polyamide AG Support Isolator	0.6	500
POLM1010	1N1-KK M6		0.6	300
POLM1011	1NMK-4 M8		1	100
POLM1012	1NMK-1 M10		1	100



POLM1019	1NMK-5 M8	Two ways Acorn Nut Glass Rainforced Polyamide AG Support Isolator	1	500
POLM1020	1NMK-6 M10		1	300
POLM1021	1NMK-7 M12		1	100



CODE	TYPE	DESCRIPTIONS	VOLTAGE (~kV)	PCS/BOX
POLM1013	1NMD-1	M16 Acorn Nut, Rainforced Support Isolator	3	18



CODE	TYPE	DESCRIPTIONS	VOLTAGE (~kV)	PCS/BOX
POLM1014	1NMA-2	M12-16 Acorn Nut Conic, Rainforced Support Isolator	3	18



CODE	TYPE	DESCRIPTIONS	VOLTAGE (~kV)	PCS/BOX
POLM1015	1NMC-3	M16 Acorn Nut, Rainforced Support Isolator	3	18



CODE	TYPE	DESCRIPTIONS	VOLTAGE (~kV)	PCS/BOX
POLM1016	1N500	M8 Acorn Nut, Rainforced Support Isolator	3	32
POLM1017	1N500	M10 Acorn Nut, Rainforced Support Isolator	3	32
POLM1018	1N500	M12 Acorn Nut, Rainforced Support Isolator	3	32

EQUIPOTENTIAL BAR



CODE	DESCRIPTIONS	PCS/BOX
İR-303250	30 x 3 25 cm 7 Hole	1
İR-303300	30 x 3 30 cm 10 Hole	1
İR-305300	30 x 5 30 cm 7 Hole	1
İR-305400	30 x 5 40 cm 9 Hole	1
İR-305500	30 x 5 50 cm 12 Hole	1

LV DREDGE ISOLATORS

	CODE	TYPE	DESCRIPTIONS	VOLTAGE (~kV)	PCS/BOX
	**POLT1002**	3 x 1F/5 - 10 mm L = 193 mm	Rainforced Support Dredge Isolator	5	30
	**POLT1007**	3 x 2F/10 mm L = 285 mm	Rainforced Support Dredge Isolator	5	50
	**POLT1008**	3 x 2F/5 mm L = 285 mm	Rainforced Support Dredge Isolator	5	50
	POLT1003	3 x 1FK/5 mm Cu L = 134 mm	Rainforced Support Dredge Isolator	5	50
	**POLT1004**	3 x 1F+N/5 mm L = 134 mm	Rainforced Support Dredge Isolator	5	50
	**POLT1001**	1 x 4F/10 mm L = 134 mm	Rainforced Support Dredge Isolator	5	50
	**POLT1005**	3 x 1F+N/5 - 10 mm L = 230 mm	Rainforced Support Dredge Isolator	5	32
	POLT1006	3 x 1FY+N L = 150 mm	Rainforced Support Dredge Isolator	5	26
	**POLT1009**	3 x 2F+N/5 - 10 mm L = 303 mm	Rainforced Support Dredge Isolator	5	50
	**POLT1010**	3 x 3F/5 - 10 mm L = 340 mm	Rainforced Support Dredge Isolator	5	50
	**POLT1012**	3 x 1F/5 - 10 mm L = 193 mm	Rainforced Support Dredge Isolator	–	1
	**POLT1013**	3 x 1F+N, 5-10 mm L = 269 mm	Rainforced Support Dredge Isolator	–	1

CABLE HANGING ACCESSORIES







CODE	DESCRIPTION	BOX
İR-7001	80 mm Cable Holder Accessories	50

SIEMENS BELLOWS



CODE	DESCRIPTION	BOX
İRPKT-1050	Bellows / 180 x 64 Siemens	70

MEDIUM VOLTAGE CABLE BELLOWS



CODE	DESCRIPTION	BOX
İRPKT-1030	Ø100 Plastic Cable Holder	100
İRPKT-1040	Ø66 Plastic Cable Holder	100

MEDIUM VOLTAGE CABLE HOLDER



CODE	DESCRIPTION	BOX
İRPKT-1020	50 - 70 mm Plastic Cable Holder	100

FIBER GLASS PLATES



CODE	DESCRIPTIONS	SIZE (mm)		
		Thickness	W	H
İRCEP038001200	Fiber Glass Polyester Plate	3	800	1200
İRCEP058001200		5	800	1200
İRCEP108001200		10	800	1200
İRCEP158001000		15	800	1200
İRCEP208001200		20	800	1200
İRCEP258001200		25	800	1200
İRCEP308001200		30	800	1200
İRCET030301200	Fiber Glass Polyester Wedge	3	30	1200
İRCET030401200		3	40	1200
İRCET030501200		3	50	1200
İRCET030601200		3	60	1200
İRCET050301200	Fiber Glass Polyester Wedge	5	30	1200
İRCET050401200		5	40	1200
İRCET050501200		5	50	1200
İRCET050601200		5	60	1200
İRCET100301200	Fiber Glass Polyester Wedge	10	30	1200
İRCET100401200		10	40	1200
İRCET100501200		10	50	1200
İRCET100601200		10	60	1200
İRCET150301200	Fiber Glass Polyester Wedge	15	30	1200
İRCET150401200		15	40	1200
İRCET150501200		15	50	1200
İRCET150601200		15	60	1200
İRCET200301200	Fiber Glass Polyester Wedge	20	30	1200
İRCET200401200		20	40	1200
İRCET200501200		20	50	1200
İRCET200601200		20	60	1200
İRCET250301200	Fiber Glass Polyester Wedge	25	30	1200
İRCET250401200		25	40	1200
İRCET250501200		25	50	1200
İRCET250601200		25	60	1200
İRCET300301200	Fiber Glass Polyester Wedge	30	30	1200
İRCET300401200		30	40	1200
İRCET300501200		30	50	1200
İRCET300601200		30	60	1200

PANEL PROJECT POCKET





7001
7035
9001

RAL 7032 CODE	RAL 7035 CODE	RAL 9001 CODE	SIZE	BOX
İRPCB-403	İRPCB-404	İRPCB-405	A4	50
İRPCB-503	İRPCB-504	İRPCB-505	A5	50

LOW VOLTAGE INSULATORS

SK TYPE



CODE	DESCRIPTIONS	PCS/BOX
ALCE-SK 201706	M6	100
ALCE-SK 252206	M6	100
ALCE-SK 303006	M6	80
ALCE-SK 303008	M8	80
ALCE-SK 353208	M8	100
ALCE-SK 353210	M10	100
ALCE-SK 404008	M8	75
ALCE-SK 404010	M10	75
ALCE-SK 454610	M10	50
ALCE-SK 503608	M8	80
ALCE-SK 503610	M10	80
ALCE-SK 604010	M10	50
ALCE-SK 605012	M12	32
EREN-SK 606010	M10	24
EREN-SK 754610	M10	50

SR TYPE



CODE	DESCRIPTIONS	PCS/BOX
ALCE-SR 303006	M6	80
ALCE-SR 303008	M8	80
ALCE-SR 403006	M6	60
ALCE-SR 403008	M8	60
ALCE-SR 404110	M10	27
ALCE-SR 604110	M10	18
ALCE-SR 806012	M12	8

RD TYPE



CODE	DESCRIPTIONS	PCS/BOX
ALCE-RD 303006	M6	80
ALCE-RD 303008	M8	80
ALCE-RD 404008	M8	75
ALCE-RD 404010	M10	75
ALCE-RD 404012	M12	75
ALCE-RD 504010	M10	50
ALCE-RD 604010	M10	50

1NS TYPE



CODE	DESCRIPTIONS	PCS/BOX
ALCE-1N-S1	M8 Acorn Nut	50
ALCE-1N-S2	M10 Acorn Nut	50
ALCE-1N-S3	M8 Acorn Nut	50
ALCE-1N-S3	M10 Acorn Nut	50
ALCE-1N-S3 1S	M10 Acorn Nut + M10 Stud	75
ALCE-1N-S3 2S	M8 Stud	75
ALCE-1N-S3 2S	M10 Stud	75

1NG TYPE



CODE	DESCRIPTIONS	PCS/BOX
ALCE-1N-G	M6 Acorn Nut	500
ALCE-1N-G-S1	M6 Acorn Nut + M6 Stud	500
ALCE-1N-G-2S	M6 Stud	500



CODE	DESCRIPTIONS	PCS/BOX
ALCE-1N-Y	M8 Acorn Nut	250
ALCE-1N-T	M10 Acorn Nut	50
ALCE-1N-C	M16 Acorn Nut	50
ALCE-1N-K	M16 Acorn Nut	30
ALCE-1N-D	M12 Acorn Nut	30
ALCE-1N-D	M16 Acorn Nut	30

LOW VOLTAGE DREDGE INSULATORS



CODE	DESCRIPTIONS	BOX PCS
ALCE-BSB 4X6	4 pcs 1 x 6 mm busbar	20 / 50 T.
ALCE-3X1F	3 pcs 1 x 10 mm busbar 3 pcs 1 x 5 mm busbar	20 / 10 T.
ALCE-3X1F+N	3 pcs 1 x 10 mm busbar 3 pcs 1 x 5 mm busbar & neutral	20 / 10 T.
ALCE-3X2F	3 pcs 2 x 10 mm busbar 3 pcs 2 x 5 mm busbar	20 / 10 T.
ALCE-3X2F+N	3 pcs 2 x 10 mm busbar 3 pcs 2 x 5 mm busbar& neutral	20 / 10 T.
ALCE-3X3F	3 pcs 3 x 10 mm busbar 3 pcs 3 x 5 mm busbar	20 / 10 T.



CODE	DESCRIPTIONS	BOX PCS
ALCE-BT100	3 pcs 2 x 10mm busbar BT 100 3 pcs 3 x 5 mm busbar	20 / 10 T.
ALCE-MBT 4	4 pcs 4 x 5 mm busbar	20 / 10 T.











Range of Products;


- *Insulated cord end terminal DIN Norm 46228*
- *Insulated twin cord end terminal DIN Norm 46228*
- *Non - Insulated cord end terminals DIN 46228*
- *Insulated ring type terminals*
- *Insulated fork type terminals*
- *Hook type ınsulated terminals (Extra Double terminaled)*
- *Non-Insulated (Welded) fork type terminals*
- *Insulated Pin type terminals*
- *Insulated Blade type terminals*
- *Insulated Bullet male type terminals*
- *Insulated Bullet Female type terminals*
- *Insulated FASTON female type terminals (Extra double terminaled)*
- *Full Insulated FASTON Female terminals (Extra double terminaled)*

CORD END TERMINALS

INSULATED CORD END TERMINAL DIN NORM





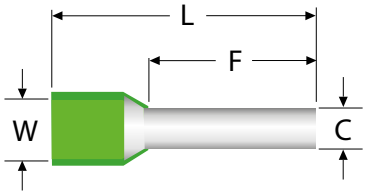


COLOUR CODES		
FRENCH	GERMAN	DIN

	CODE	CABLE CROSS SECTION (mm²)	F	L	C	W	PCS/BOX
ST	ONKA-8005	0,34	8,0	12,0	0,80	1,9	1.000
	ONKA-8006	0,50	6,0	12,0	1,00	2,6	1.000
ST	ONKA-8007	0,50	8,0	14,0	1,00	2,6	1.000
	ONKA-8008	0,50	10,0	16,0	1,00	2,6	1.000
	ONKA-8009	0,75	6,0	12,0	1,20	2,8	1.000
ST	ONKA-8010	0,75	8,0	14,0	1,20	2,8	1.000
	ONKA-8011	0,75	10,0	16,0	1,20	2,8	1.000
	ONKA-8012	0,75	12,0	18,0	1,20	2,8	1.000
	ONKA-8013	1,00	6,0	12,0	1,40	3,0	1.000
ST	ONKA-8014	1,00	8,0	14,0	1,40	3,0	1.000
	ONKA-8015	1,00	10,0	16,0	1,40	3,0	1.000
	ONKA-8016	1,00	12,0	18,0	1,40	3,0	1.000
ST	ONKA-8017	1,50	8,0	14,0	1,70	3,5	500
	ONKA-8018	1,50	10,0	16,0	1,70	3,5	500
	ONKA-8019	1,50	12,0	18,0	1,70	3,5	500
	ONKA-8020	1,50	18,0	24,0	1,70	3,5	500
ST	ONKA-8021	2,50	8,0	14,0	2,20	4,2	500
	ONKA-8022	2,50	10,0	16,0	2,20	4,2	500
	ONKA-8023	2,50	12,0	18,0	2,20	4,2	500
	ONKA-8024	2,50	18,0	24,0	2,20	4,2	500
ST	ONKA-8025	4,00	10,0	17,0	2,80	4,8	200
	ONKA-8026	4,00	12,0	20,0	2,80	4,8	200
	ONKA-8027	4,00	18,0	26,0	2,80	4,8	200
ST	ONKA-8028	6,00	12,0	20,0	3,50	6,3	200
	ONKA-8029	6,00	18,0	26,0	3,50	6,3	200
ST	ONKA-8030	10	12,0	22,0	4,50	7,6	100
	ONKA-8031	10	18,0	28,0	4,50	7,6	100
ST	ONKA-8032	16	12,0	24,0	5,80	8,8	100
	ONKA-8033	16	18,0	28,0	5,80	8,8	75
ST	ONKA-8034	25	16,0	30,0	7,30	11,2	50
	ONKA-8156	25	18,0	32,0	7,30	11,2	50
	ONKA-8035	25	22,0	36,0	7,30	11,2	50
ST	ONKA-8036	35	16,0	30,0	8,30	12,7	50
	ONKA-8037	35	18,0	32,0	8,30	12,7	25
	ONKA-8038	35	25,0	39,0	8,30	12,7	25
ST	ONKA-8039	50	20,0	36,0	10,30	15,0	25
	ONKA-8040	50	25,0	40,0	10,30	15,0	25
ST	ONKA-8041	70	21,0	37,0	13,50	16,0	10
ST	ONKA-8042	95	25,0	44,0	14,70	18,0	10
ST	ONKA-8043	120	27,0	48,0	16,70	20,0	10
ST	ONKA-8044	150	32,0	58,0	19,50	23,0	10

INSULATED CORD END TERMINAL DIN NORM



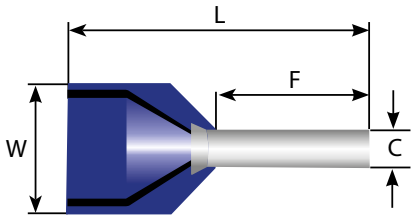




Made of copper (nickel plated)
According to DIN 46228
Standard insulated with polyamide,
working temperature
–40 °C - 105 °C

COLOUR CODES				CODE	CABLE CROSS SECTION (mm^2)	F	L	C	W	PCS/BOX
FRENCH	GERMAN	DIN								
			ST	ONKA-8161	2 x 0,50	8,0	15,0	1,5	2,5 / 4,7	500
			ST	ONKA-8162	2 x 0,75	0,8	15,0	1,8	2,8 / 5,0	500
				ONKA-8163	2 x 0,75	10,0	17,0	1,8	2,8 / 5,0	500
			ST	ONKA-8164	2 x 1,0	8,0	15,0	2,05	3,4 / 5,4	500
				ONKA-8165	2 x 1,0	10,0	17,0	2,05	3,4 / 5,4	500
				ONKA-8166	2 x 1,5	8,0	16,0	2,3	3,6 / 6,6	500
			ST	ONKA-8528	2 x 1,5	10,0	16,0	2,3	3,6 / 6,6	500
				ONKA-8167	2 x 1,5	12,0	20,0	2,3	3,6 / 6,6	500
				ONKA-8168	2 x 2,5	10,0	18,5	2,8	4,2 / 7,8	250
			ST	ONKA-8169	2 x 2,5	13,0	21,5	2,8	4,2 / 7,8	250
			ST	ONKA-8170	2 x 4,0	12,0	23,0	3,7	4,9 / 8,8	100
			ST	ONKA-8171	2 x 6,0	14,0	26,0	4,8	6,9 / 10,0	100
			ST	ONKA-8172	2 x 10,0	14,0	26,5	6,4	7,6 / 12,8	50
			ST	ONKA-8173	2 x 16,0	14,0	31,5	8,3	9,6 / 18,6	50

NON - INSULATED CORD END TERMINALS DIN 46228





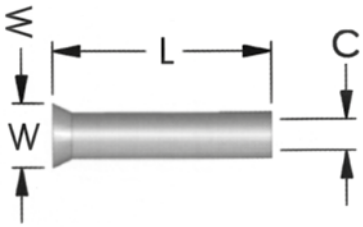



CODE	CABLE CROSS SECTION (mm²)	L	C	W	PCS/BOX
ONKA - 8100	0.50	6.0	1.0	2.1	1.000
ONKA - 8101	0.50	8.0	1.0	2.1	1.000
ONKA - 8102	0.50	10.0	1.0	2.1	1.000
ONKA - 8103	0.75	6.0	1.2	2.3	1.000
ONKA - 8104	0.75	8.0	1.2	2.3	1.000
ONKA - 8105	0.75	10.0	1.2	2.3	1.000
ONKA - 8107	1.0	8.0	1.4	2.5	1.000
ONKA - 8108	1.0	10.0	1.4	2.5	1.000
ONKA - 8109	1.0	12.0	1.4	2.5	1.000
ONKA - 8111	1.5	8.0	1.7	2.8	1.000
ONKA - 8112	1.5	10.0	1.7	2.8	1.000
ONKA - 8113	1.5	12.0	1.7	2.8	1.000
ONKA - 8115	2.5	8.0	2.2	3.4	1.000
ONKA - 8116	2.5	10.0	2.2	3.4	1.000
ONKA - 8117	2.5	12.0	2.2	3.4	1.000
ONKA - 8118	4.0	8.0	2.8	4.0	1000
ONKA - 8120	4.0	10.0	2.8	4.0	1000
ONKA - 8121	4.0	12.0	2.8	4.0	1000
ONKA - 8122	4.0	15.0	2.8	4.0	1000
ONKA - 8123	4.0	18.0	2.8	4.0	1000
ONKA - 8124	6.0	10.0	3.5	4.7	500
ONKA - 8125	6.0	12.0	3.5	4.7	500
ONKA - 8126	6.0	15.0	3.5	4.7	500
ONKA - 8127	6.0	18.0	3.5	4.7	500
ONKA - 8128	10.0	12.0	4.5	5.8	200
ONKA - 8129	10.0	15.0	4.5	5.8	200
ONKA - 8130	10.0	18.0	4.5	5.8	200
ONKA - 8131	16.0	12.0	5.8	7.5	100
ONKA - 8132	16.0	15.0	5.8	7.5	100
ONKA - 8133	16.0	18.0	5.8	7.5	100
ONKA - 8134	25.0	15.0	7.3	9.5	100
ONKA - 8135	25.0	16.0	7.3	9.5	100
ONKA - 8136	25.0	18.0	7.3	9.5	100
ONKA - 8137	25.0	22.0	7.3	9.5	100
ONKA - 8138	35.0	16.0	8.3	11.0	75
ONKA - 8139	35.0	18.0	8.3	11.0	75
ONKA - 8140	35.0	20.0	8.3	11.0	75
ONKA - 8141	35.0	25.0	8.3	11.0	75
ONKA - 8142	50.0	18.0	10.3	13.0	25
ONKA - 8143	50.0	20.0	10.3	13.0	25
ONKA - 8144	50.0	25.0	10.3	13.0	25
ONKA - 8146	70.0	25.0	13.5	15.3	10
ONKA - 8148	95.0	25.0	14.7	16.6	10
ONKA - 8151	120.0	32.0	16.7	18.0	10
ONKA - 8153	150.0	32.0	19.5	21.5	10

Made of copper (nickel plated) according to DIN 46228 standard


INSULATED RING TYPE TERMINALS



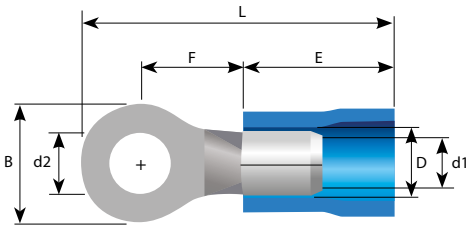





0,5 ~ 1,5 mm^2
Cable Cross Section



1,5 ~ 2,5 mm^2
Cable Cross Section



4,0 ~ 6,0 mm^2
Cable Cross Section




8.0 ~ 10.0 mm^2 ,
Cable Cross Section

CODE	METRIC DIMENSION (d2)	B	L	F	E	D	d1	PCS/BOX
ONKA-8045	3.2	5.5	16.7	4.0	10.0	4.1	1.7	200
ONKA-8047	3.7	6.6	19.6	6.3	10.0	4.1	1.7	200
ONKA-8049	4.3	6.6	19.6	6.3	10.0	4.1	1.7	200
ONKA-8050	4.3	8.0	21.0	7.0	10.0	4.1	1.7	200
ONKA-8051	5.3	8.0	21.0	7.0	10.0	4.1	1.7	200
ONKA-8052	6.5	11.6	26.8	11.1	10.0	4.1	1.7	200
ONKA-8053	8.4	11.6	26.8	11.1	10.0	4.1	1.7	200
ONKA-8054	10.5	13.6	30.7	13.9	10.0	4.1	1.7	100
ONKA-8055	13	19.2	35.6	16.0	10.0	4.1	1.7	100
ONKA-8056	3.2	6.4	17.5	4.3	10.0	4.5	2.3	200
ONKA-8058	3.7	6.6	19.5	6.3	10.0	4.5	2.3	200
ONKA-8059	3.7	8.5	22.0	7.8	10.0	4.5	2.3	200
ONKA-8060	4.3	6.6	19.5	6.3	10.0	4.5	2.3	200
ONKA-8086	4.3	8.5	22.0	7.8	10.0	4.5	2.3	200
ONKA-8087	5.3	8.5	22.0	7.8	10.0	4.5	2.3	200
ONKA-8088	5.3	9.5	22.0	7.3	10.0	4.5	2.3	200
ONKA-8089	6.5	12.0	27.0	11.0	10.0	4.5	2.3	200
ONKA-8090	8.4	12.0	27.0	11.0	10.0	4.5	2.3	200
ONKA-8091	10.5	13.6	30.7	13.9	10.0	4.5	2.3	100
ONKA-8092	13.0	19.2	35.6	16.0	10.0	4.5	2.3	100
ONKA-8093	4.3	7.2	22.0	5.9	12.5	6.5	3.4	75
ONKA-8094	4.3	9.5	25.5	8.3	12.5	6.5	3.4	75
ONKA-8095	5.3	9.5	25.5	8.3	12.5	6.5	3.4	75
ONKA-8096	6.5	12.0	29.0	10.5	12.5	6.5	3.4	75
ONKA-8097	8.4	15.0	33.7	13.7	12.5	6.5	3.4	75
ONKA-8098	10.5	15.0	33.7	13.7	12.5	6.5	3.4	75
ONKA-8099	13.0	19.2	38.1	16.0	12.5	6.5	3.4	75
ONKA-8158	4.3	12.0	32.5	9.7	17.0	8.0	4.5	50
ONKA-8159	5.3	12.0	32.5	9.7	17.0	8.0	4.5	50
ONKA-8160	6.7	12.0	32.5	9.7	17.0	8.0	4.5	50
ONKA-8174	5.3	15.0	38.0	13.8	17.0	8.0	4.5	50
ONKA-8175	6.7	15.0	38.0	13.8	17.0	8.0	4.5	50
ONKA-8176	8.4	15.0	38.0	13.8	17.0	8.0	4.5	50
ONKA-8177	10.5	15.0	38.0	13.8	17.0	8.0	4.5	50

INSULATED FORK TYPE TERMINALS



Made of copper (nickel plated) according to DIN 46237 standard, insulated with PVC. Working temperature 105 °C resistive 600 volts

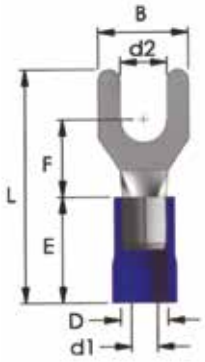



0,5 ~ 1,5 mm^2
Cable Cross Section

CODE	METRIC DIMENSION (d2)	B	L	F	E	D	d1	PCS/BOX
ONKA - 8061	3.2	5.8	21.0	6.3	10.0	4.1	1.7	200
ONKA - 8062	3.7	6.4	20.6	6.3	10.0	4.1	1.7	200
ONKA - 8063	3.7	7.2	21.0	6.3	10.0	4.1	1.7	200
ONKA - 8064	4.3	6.4	20.6	6.3	10.0	4.1	1.7	200
ONKA - 8065	4.3	7.2	21.0	6.3	10.0	4.1	1.7	200
ONKA - 8066	5.3	8.0	21.0	7.0	10.0	4.1	1.7	200
ONKA - 8067	5.3	9.5	21.0	7.0	10.0	4.1	1.7	200
ONKA - 8068	6.5	12.0	27.2	11.0	10.0	4.1	1.7	200
ONKA - 8069	8.4	12.0	27.2	11.0	10.0	4.1	1.7	100



1,5 ~ 2,5 mm^2
Cable Cross Section

ONKA - 8070	3.2	5.8	21.0	6.3	10.0	4.5	2.3	200
ONKA - 8071	3.7	6.4	21.0	6.3	10.0	4.5	2.3	200
ONKA - 8072	4.3	6.4	21.0	6.3	10.0	4.5	2.3	200
ONKA - 8073	4.3	7.2	21.2	6.5	10.0	4.5	2.3	200
ONKA - 8074	5.3	9.5	22.0	7.2	10.0	4.5	2.3	200
ONKA - 8075	6.5	12.0	27.2	11.0	10.0	4.5	2.3	200
ONKA - 8076	8.4	12.0	27.2	11.0	10.0	4.5	2.3	100



4,0 ~ 6,0 mm^2
Cable Cross Section

ONKA - 8580	3.7	7.2	25.2	7.5	12.5	6.5	3.4	75
ONKA - 8077	4.3	8.5	25.2	7.5	12.5	6.5	3.4	75
ONKA - 8078	4.3	9.5	25.2	7.5	12.5	6.5	3.4	75
ONKA - 8079	5.3	9.5	25.2	7.5	12.5	6.5	3.4	75
ONKA - 8080	6.5	9.5	25.2	7.5	12.5	6.5	3.4	75
ONKA - 8081	6.5	12.0	31.2	12.0	12.5	6.5	3.4	75
ONKA - 8082	8.4	13.5	30.0	10.5	12.5	6.5	3.4	75




8.0 ~ 10.0 mm^2 ,
Cable Cross Section

ONKA - 8083	4.3	8.2	29.0	8.1	17.0	8.0	4.5	50
ONKA - 8084	5.3	9.0	29.0	8.1	17.0	8.0	4.5	50
ONKA - 8085	6.5	10.8	30.5	8.6	17.0	8.0	4.5	50

HOOK TYPE INSULATED TERMINALS (EXTRA DOUBLE TERMINALED)



Made of brass (tin plated), Insulated with PVC,
Working temperature 75 °C, Resistive to 300 volts





0,5 ~ 1,5 mm² Cable Cross Section

CODE	METRIC DIMENSION (d2)	B	L	F	E	D	d1	PCS/BOX
ONKA - 8290	4.3	8.0	21.0	7.0	10.0	4.1	1.7	100
ONKA - 8291	5.3	8.0	21.0	7.0	10.0	4.1	1.7	100
ONKA - 8292	6.5	11.6	26.8	11.1	10.0	4.1	1.7	100



1,5 ~ 2,5 mm² Cable Cross Section

ONKA - 8293	4.3	8.5	22.0	7.8	10.0	4.5	2.3	100
ONKA - 8294	5.3	9.5	22.0	7.3	10.0	4.5	2.3	100
ONKA - 8295	6.5	12.0	27.0	11.0	10.0	4.5	2.3	100




4,0 ~ 6,0 mm² Cable Cross Section

ONKA - 8296	4.3	9.5	25.5	8.3	12.5	6.5	3.4	50
ONKA - 8297	5.3	9.5	25.0	8.3	12.5	6.5	3.4	50
ONKA - 8298	6.5	12.0	29.0	10.5	12.5	6.5	3.4	50

NON-INSULATED (WELDED) FORK TYPE TERMINALS

Made of brass (tin plated),
Working temperature 75 °C, Resistive to 300 volts






CODE	METRIC DIMENSION (d2)	B	L	F	E	D	d1	PCS/BOX
ONKA - 8301	3.2	5.8	16.0	6.3	5.0	3.4	1.7	1.000
ONKA - 8302	4.3	7.2	16.0	6.3	5.0	3.4	1.7	1.000
ONKA - 8303	5.3	8.0	16.0	7.0	5.0	3.4	1.7	1.000
ONKA - 8304	6.5	9.5	16.0	7.0	5.0	3.4	1.7	1.000
ONKA - 8305	8.4	12.0	22.2	11.0	5.0	3.4	1.7	1.000
ONKA - 8306	3.2	5.8	16.0	6.3	5.0	4.1	2.3	1.000
ONKA - 8307	4.3	7.2	16.2	6.5	5.0	4.1	2.3	1.000
ONKA - 8308	5.3	8.5	17.0	7.3	5.0	4.1	2.3	1.000
ONKA - 8309	6.5	9.5	17.0	7.3	5.0	4.1	2.3	1.000
ONKA - 8310	8.4	12.0	22.0	11.0	5.0	4.1	2.3	1.000
ONKA - 8311	4.3	8.5	18.7	7.5	6.0	5.6	3.4	500
ONKA - 8312	5.3	9.5	18.7	7.5	6.0	5.6	3.4	500
ONKA - 8313	6.5	9.5	18.7	7.5	6.0	5.6	3.4	500
ONKA - 8314	8.4	13.5	23.5	10.5	6.0	5.6	3.4	500
ONKA - 8315	4.3	8.2	20.5	8.1	8.5	7.2	4.5	500
ONKA - 8316	5.3	9.0	20.5	8.1	8.5	7.2	4.5	500
ONKA - 8317	6.5	10.8	22.5	8.6	8.5	7.2	4.5	500

INSULATED PIN TYPE TERMINALS







0,5 ~ 1,5 mm² Cable Cross Section



1,5 ~ 2,5 mm² Cable Cross Section




4,0 ~ 6,0 mm² Cable Cross Section

CODE	B	L	F	E	D	d1	PCS/BOX
ONKA-8186	1.9	20.5	10.5	10.0	4.1	1.7	200
ONKA-8187	1.9	20.5	10.5	10.0	4.5	2.3	200
ONKA-8188	1.9	22.5	12.5	10.0	4.5	2.3	200
ONKA-8189	1.9	28.5	18.5	10.0	4.5	2.3	200
ONKA-8190	2.8	26.2	13.7	12.5	6.5	3.4	100

Made of copper (Tin Plated), insulated with PVC, working temperature 75 °C, resistive to 600 volts

INSULATED BLADE TYPE TERMINALS



Made of copper (tin plated) insulated with NYLON, working temperature 105 °C resistive to 600 volts



0,5 ~ 1,5 mm² Cable Cross Section



1,5 ~ 2,5 mm² Cable Cross Section





4,0 ~ 6,0 mm² Cable Cross Section

CODE	B	L	F	E	D	d1	PCS/BOX
ONKA-8191	2.4	21.5	10.5	11.0	4.1	1.7	100
ONKA-8192	3.0	22.0	11.0	11.0	4.1	1.7	100
ONKA-8193	3.0	25.0	14.0	11.0	4.1	1.7	100
ONKA-8194	2.8	20.0	9.0	11.0	4.5	2.3	100
ONKA-8195	2.4	29.0	18.0	11.0	4.5	2.3	100
ONKA-8196	3.0	31.0	18.0	13.0	6.5	3.4	100

INSULATED BLADE TYPE TERMINALS







0,5 ~ 1,5 mm² Cable Cross Section



1,5 ~ 2,5 mm² Cable Cross Section




4,0 ~ 6,0 mm² Cable Cross Section

CODE	B	L	F	E	D	d1	PCS/BOX
ONKA-8200	4.0	8.5	21.0	10.0	4.3	1.7	100
ONKA-8201	4.0	8.5	21.0	10.0	4.3	2.3	100
ONKA-8202	5.0	8.5	21.0	10.0	5.0	2.3	100
ONKA-8203	5.0	8.5	23.5	13.0	6.5	3.4	100

Made of copper (Tin Plated), insulated with PVC, working temperature 75 °C, resistive to 300 volts

INSULATED BULLET FEMALE TYPE TERMINALS







0,5 ~ 1,5 mm² Cable Cross Section



1,5 ~ 2,5 mm² Cable Cross Section



4,0 ~ 6,0 mm² Cable Cross Section


CODE	B	L	F	E	D	d1	PCS/BOX
ONKA-8210	4.0	9.0	23.5	11.0	4.3	1.7	100
ONKA-8211	4.0	9.0	23.5	11.0	5.0	2.3	100
ONKA-8212	5.0	9.0	23.5	11.0	5.0	2.3	100
ONKA-8213	5.0	9.0	25.0	13.0	6.5	3.4	100

Made of copper (Tin Plated), insulated with PVC, working temperature 75 °C, resistive to 300 volts

INSULATED FASTON FEMALE TYPE TERMINALS (EXTRA DOUBLE TERMINALED)



Made of brass (tin plated), Insulated with PVC,
Working temperature 75 °C, Resistive to 300 volts





0,5 ~ 1,5 mm² Cable Cross Section



1,5 ~ 2,5 mm² Cable Cross Section




4,0 ~ 6,0 mm² Cable Cross Section

CODE	SOCKET WIDTH	B	F	L	E	D	d1	PCS/BOX
ONKA - 8230	0.5 x 2.8	3.2	6.4	18.5	10.0	4.3	1.7	200
ONKA - 8231	0.8 x 2.8	3.2	6.4	18.5	10.0	4.3	1.7	200
ONKA - 8232	0.5 x 4.8	5.0	6.5	19.0	10.0	4.3	1.7	200
ONKA - 8233	0.8 x 4.8	5.0	6.5	19.0	10.0	4.3	1.7	200
ONKA - 8234	0.8 x 6.4	6.6	7.9	21.0	10.0	4.3	1.7	200
ONKA - 8235	0.8 x 8.0	8.4	10.0	24.0	10.0	4.3	1.7	200
ONKA - 8236	0.5 x 2.8	3.2	6.4	18.5	10.0	5.0	2.3	150
ONKA - 8237	0.8 x 2.8	3.2	6.4	18.5	10.0	5.0	2.3	150
ONKA - 8238	0.5 x 4.8	5.0	6.5	19.0	10.0	5.0	2.3	150
ONKA - 8239	0.8 x 4.8	5.0	6.5	19.0	10.0	5.0	2.3	150
ONKA - 8240	0.8 x 6.4	6.6	7.9	21.0	10.0	5.0	2.3	150
ONKA - 8241	0.8 x 8.0	8.4	10.0	24.0	10.0	5.0	2.3	150
ONKA - 8242	1.2 x 9.5	9.5	12.5	29.0	10.0	5.0	2.3	150
ONKA - 8243	0.8 x 6.4	6.6	7.9	23.5	12.5	6.5	3.4	100
ONKA - 8244	1.2 x 9.5	9.9	12.5	28.5	12.5	6.5	3.4	100

PVC FULL INSULATED FASTON FEMALE TERMINALS (EXTRA DOUBLE TERMINALED)



Made of brass (tin plated), Insulated with PVC,
Working temperature 75 °C, Resistive to 300 volts





0,5 ~ 1,5 mm² Cable Cross Section



1,5 ~ 2,5 mm² Cable Cross Section



4,0 ~ 6,0 mm² Cable Cross Section


CODE	SOCKET WIDTH	B	F	L	E	D	d1	PCS/BOX
ONKA - 8250	0.5 x 2.8	3.2	6.4	19.0	10.0	4.3	1.7	200
ONKA - 8251	0.8 x 2.8	3.2	6.4	19.0	10.0	4.3	1.7	200
ONKA - 8252	0.5 x 4.8	5.0	6.5	20.0	10.0	4.3	1.7	200
ONKA - 8253	0.8 x 4.8	5.0	6.5	20.0	10.0	4.3	1.7	200
ONKA - 8254	0.8 x 6.4	6.6	7.9	22.0	10.0	4.3	1.7	100
ONKA - 8255	0.5 x 2.8	3.2	6.4	19.0	10.0	5.0	2.3	100
ONKA - 8256	0.8 x 2.8	3.2	6.4	19.0	10.0	5.0	2.3	100
ONKA - 8257	0.5 x 4.8	5.0	6.5	20.0	10.0	5.0	2.3	100
ONKA - 8258	0.8 x 4.8	5.0	6.5	20.0	10.0	5.0	2.3	100
ONKA - 8259	0.8 x 6.4	6.6	7.9	22.0	10.0	5.0	2.3	100
ONKA - 8260	0.8 x 6.4	6.6	7.9	25.0	13.0	6.5	3.4	75

POLIYAMIDE FULL INSULATED FASTON MALE TYPE TERMINALS



Made of brass (tin plated),
Insulated with Polyamide,
Working temperature 105 °C,
Resistive to 300 volts



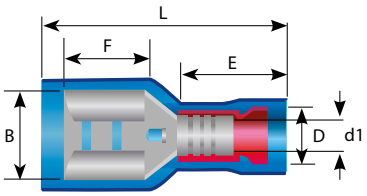



0,5 ~ 1,5 mm² Cable Cross Section 22~16 AWG



1,5 ~ 2,5 mm² Cable Cross Section 16~14 AWG




4,0 ~ 6,0 mm² Cable Cross Section 12~10 AWG

CODE	SOCKET WIDTH	B	F	L	E	D	d1	PCS/BOX
ONKA - 8529	0.8 x 2.8	2.8	19.0	10.5	4.2	1.7	1.7	100
ONKA - 8261	0.8 x 6.4	6.4	22.0	10.5	4.2	1.7	1.7	100
ONKA - 8262	0.8 x 6.4	6.4	7.9	22.0	10.5	4.9	2.3	100
ONKA-8263	0.8 x 6.4	6.4	24.5	13.0	6.5	3.4	3.4	100

INSULATED FASTON MALE TYPE TERMINALS



Made of brass (tin plated),
Insulated with PVC,
Working temperature 75 °C,
300 Volts Resistive

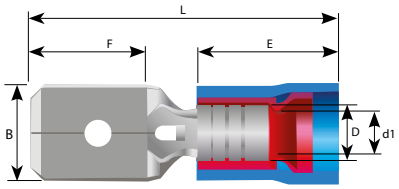



0,5 ~ 1,5 mm² Cable Cross Section 22~16 AWG




1,5 ~ 2,5 mm² Cable Cross Section 16~14 AWG




4,0 ~ 6,0 mm² Cable Cross Section 12~10 AWG

CODE	SOCKET WIDTH	B	F	L	E	D	d1	PCS/BOX
ONKA - 8264	0.5 x 2.8	2.8	7.0	19.2	10.0	4.3	1.7	200
ONKA - 8265	0.8 x 2.8	2.8	7.8	20.5	10.0	4.3	1.7	200
ONKA - 8266	0.5 x 4.8	4.8	7.0	19.2	10.0	4.3	1.7	200
ONKA - 8267	0.8 x 4.8	4.8	7.8	20.5	10.0	4.3	1.7	200
ONKA - 8268	0.8 x 6.4	6.4	7.8	21.2	10.0	4.3	1.7	200
ONKA - 8269	0.5 x 2.8	2.8	7.0	19.2	10.0	5.0	2.3	150
ONKA - 8270	0.8 x 2.8	2.8	7.8	20.5	10.0	5.0	2.3	150
ONKA - 8271	0.5 x 4.8	4.8	7.0	19.2	10.0	5.0	2.3	150
ONKA - 8272	0.8 x 4.8	4.8	7.8	20.5	10.0	5.0	2.3	150
ONKA - 8273	0.8 x 6.4	6.4	7.8	21.2	10.0	5.0	2.3	150
ONKA-8274	0.8 x 6.4	6.4	7.8	23.7	12.5	6.5	3.4	100


FULLY INSULATED MALE TERMINAL & T CONNECTION TERMINAL

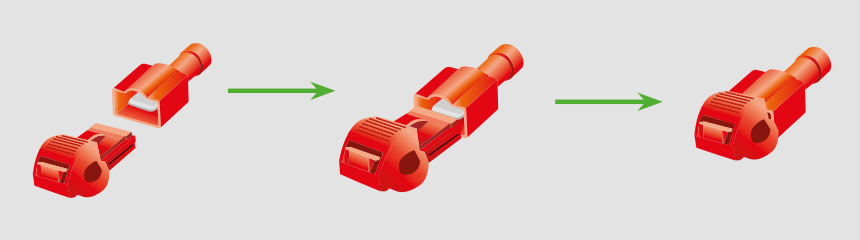

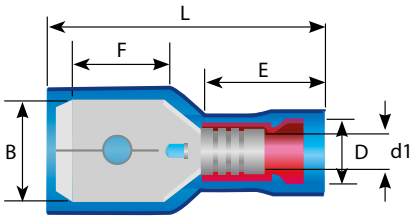



0,5 ~ 1,5 mm² Cable Cross Section 22~16 AWG



1,5 ~ 2,5 mm² Cable Cross Section 16~14 AWG



4,0 ~ 6,0 mm² Cable Cross Section 12~10 AWG


CODE	CABLE CROSS SECTION (mm²)	B	F	L	E	D	d1	PCS/BOX
ONKA-M1-6.4AFC	0.5 x 1.5	6.35	7.9	23.5	10.5	4.2	1.7	100
ONKA-M2-6.4AFC	1.5 x 2.5	6.35	7.9	23.5	10.5	4.9	2.3	100
ONKA-M5-6.4AFC	4.0 x 6.0	6.35	7.9	27.0	13.0	6.5	3.4	100

INSULATED BUTT CONNECTOR



Made of brass (tin plated),
Insulated with PVC,
Working temperature 75 °C,
300 Volts Resistive






CODE	CABLE CROSS SECTION (mm²)	L	d	D	PCS/BOX
ONKA-8215	0.5 x 1.5	26.0	1.7	4.1	200
ONKA-8216	1.5 x 2.5	26.0	2.3	4.5	200
ONKA-8217	4.0 x 6.0	27.0	3.4	6.5	100

INSULATED FLAG TERMINAL



Made of brass (tin plated),
Insulated with PVC,
Working temperature 105 °C,
300 Volts Resistive






CODE	CABLE CROSS SECTION (mm²)	COLOR	SOCKET WIDTH	B	F	L	E	D	d1	PCS/BOX
ONKA-8225	0.5 x 1.5	Red	0.8 x 6.4	6.6	7.9	16.1	15.0	4.5	1.7	100
ONKA-8226	1.5 x 2.5	Blue	0.8 x 6.4	6.6	7.9	16.1	15.0	4.5	2.7	100







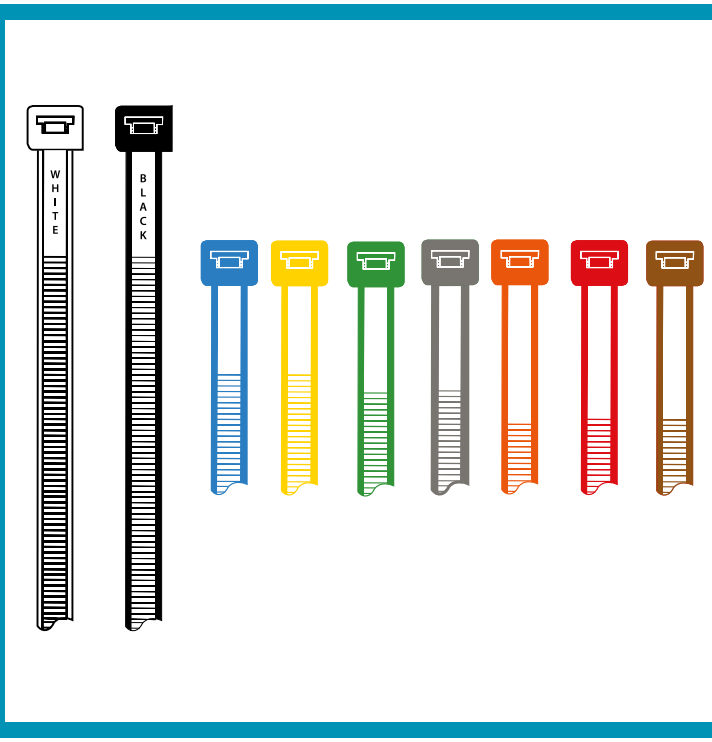



Range of Products;

- *Standard Cable Ties*
- *Standard Cable Ties (Coloured)*
- *Stainless type (AISI 304 - 316) Metal Cable Ties*
- *Cable Tie mounts (Self adhesive & Screwed)*
- *Heat shrink tubing*

CABLE TIES
HEAT SHRINKS

STANDARD CABLE TIES




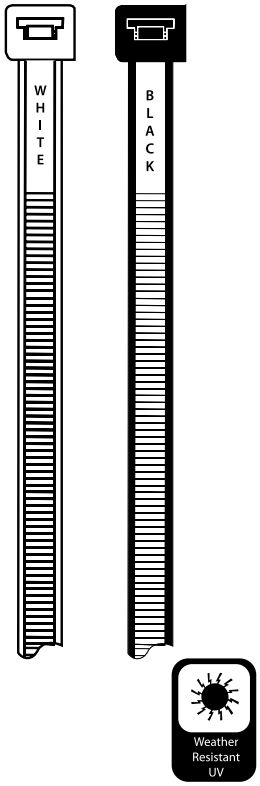

CODE	L	W	MAX.DIA	TENSILE STRENGTH (kg)	PCS	CARTON
ONKA-8480	100	2,5	22	8,00	100 / 1000	26.000
ONKA-8432	150	2,5	35	8,00	100 / 1000	20.000
ONKA-8482	200	2,5	50	8,00	100 / 1000	18.000
ONKA-8483	140	3,5	31	18,00	100 / 1000	12000
ONKA-8484	200	3,5	50	18,00	100 / 1000	10000
ONKA-8485	250	3,5	65	18,00	100 / 1000	8000
ONKA-8486	280	3,5	74	18,00	100 / 1000	8000
ONKA-8487	370	3,5	98	18,00	100 / 1000	6000
ONKA-8489	200	4,5	50	22,00	100	7.000
ONKA-8490	250	4,5	65	22,00	100	6.000
ONKA-8491	300	4,5	80	22,00	100	5.000
ONKA-8492	370	4,5	102	22,00	100	4.000
ONKA-8493	430	4,5	120	22,00	100	3.000
ONKA-8495	300	7,5	75	55,00	100	3.000
ONKA-8496	370	7,5	98	55,00	100	2.500
ONKA-8497	450	7,5	120	55,00	100	2.000
ONKA-8498	550	7,5	155	55,00	100	1.500
ONKA-8514	750	7,5	220	55,00	100	1200
ONKA-8507	600	9,0	165	80,00	100	1.200
ONKA-8502	710	9,0	205	80,00	100	1.200
ONKA-8524	760	9,0	220	80,00	100	1.200
ONKA-8504	900	9,0	260	80,00	100	1.200

STANDARD CABLE TIES (COLOURED)



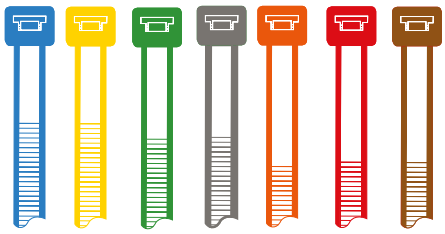


CODE	L	W	MAX.DIA	TENSILE STRENGTH (kg)	PCS	CARTON
ONKA - 8178	100	2.5	22	8.1	100 / 1000	70.000
ONKA - 8179	140	2.5	40	8.1	100 / 1000	45.000
ONKA - 8180	200	2.5	53	8.1	100 / 1000	40.000 / 45.000
ONKA - 8181	150	3.6	35	18.2	100 / 1000	35.000
ONKA - 8182	200	3.6	53	18.2	100 / 1000	25.000
ONKA - 8183	250	3.6	65	18.2	100 / 1000	20.000
ONKA - 8184	300	3.6	76	18.2	100 / 1000	20.000
ONKA - 8185	300	4.8	76	22.2	100	13.000
ONKA - 8205	370	4.8	102	22.2	100	10.000
ONKA - 8209	370	7.6	102	54.5	100	5.000
ONKA - 8218	450	7.6	127	54.5	100	3.000
ONKA - 8219	530	7.6	140	54.5	100	3.000

ONKA products are made of nylon 66 raw material which is supplied by Dupont TM Zytel. Its working temperature is between –40 °C and 85 °C. It has self extinguishing characteristic according to UL 94/V2 norm. High quality ONKA cable ties have high resistivity against materials like benzine, motorin, oil, dye, vernic. We keep stocks cable ties of white-black and all the other colors given. Please contact us for different color requirements. Our products also have UV types for external usage.

STAINLESS STEEL TYPE (AISI 304) METAL CABLE TIES



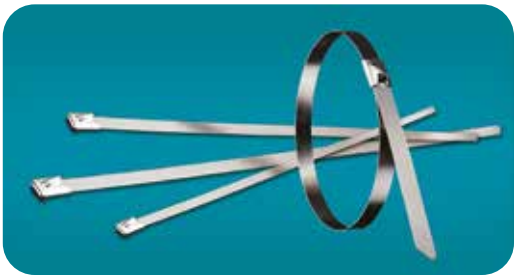

CODE	L	W	MAX. BUNDLE DIA	TENSILE STRENGTH (kg)	BAG PCS	BOX PCS
ONKA - 8600	127	4.6	25.0	46	100	8000
ONKA - 8601	152	4.6	37.0	46	100	8000
ONKA - 8602	201	4.6	50.0	46	100	6000
ONKA - 8603	266	4.6	69.0	46	100	6000
ONKA - 8604	300	4.6	76.0	46	100	4000
ONKA - 8605	362	4.6	102	46	100	4000
ONKA - 8606	521	4.6	152	46	100	3000
ONKA - 8607	679	4.6	203	46	100	2000
ONKA - 8608	838	4.6	254	46	100	2000
ONKA - 8609	152	7.9	25.0	114	100	4000
ONKA - 8610	201	7.9	50.0	114	100	3000
ONKA - 8611	266	7.9	69.0	114	100	3000
ONKA - 8612	300	7.9	76.0	114	100	2000
ONKA - 8613	362	7.9	102	114	100	2000
ONKA - 8614	521	7.9	152	114	100	1500
ONKA - 8615	679	7.9	203	114	100	1000
ONKA - 8616	838	7.9	254	114	100	1000


STAINLESS STEEL TYPE (AISI 304) METAL CABLE TIES PVC PLATED



CODE	L	W	MAX. BUNDLE DIA	TENSILE STRENGTH (kg)	BAG PCS	BOX PCS
GTME-PVC-127 ST	127	4.6	15	55	100	8000
GTME-PVC-152 ST	152	4.6	44	55	100	8000
GTME-PVC-201 ST	201	4.6	51	55	100	6000
GTME-PVC-266 ST	266	4.6	69	55	100	6000
GTME-PVC-300 ST	300	4.6	76	55	100	4000
GTME-PVC-362 ST	362	4.6	102	55	100	4000
GTME-PVC-521 ST	521	4.6	152	55	100	3000
GTME-PVC-679 ST	679	4.6	203	55	100	2000
GTME-PVC-838 ST	838	4.6	254	55	100	2000
GTME-PVC-152 HD	152	7.9	44	120	100	4000
GTME-PVC-201 HD	201	7.9	51	120	100	3000
GTME-PVC-266 HD	266	7.9	69	120	100	3000
GTME-PVC-300 HD	300	7.9	76	120	100	2000
GTME-PVC-362 HD	362	7.9	102	120	100	2000
GTME-PVC-521 HD	521	7.9	152	120	100	1500
GTME-PVC-679 HD	679	7.9	203	120	100	1000
GTME-PVC-838 HD	838	7.9	254	120	100	1000

CABLE TIE MOUNTS (SELF ADHESIVE & SCREWED)





CODE	A	B	C	D	H	BOX
ONKA - 8391	19	3.6	19	Ø3.2	4.0	100
ONKA - 8392	28	4.8	28	Ø3.2	4.5	100

Features: 1mm band thickness, 120°C resistence, 96kg/m3, 60dk fully stickness

HEAT SHRINK TUBING (+125 0C / -55 0C, 600V, POLYOLEFIN)







2/1 HEAT SHRINK TUBING BLACK

Code	Sections		Before Shrinking (mm)		After Shrinking (mm)		Meter (m)
	Inc (Ø)	mm	Inner Dia	Wall Thicknes	Inner Dia	Wall Thicknes	
MAKO-53000	3/64	1	1,5 ± 0,2	0,15 ± 0,05	0,50	0,28 ± 0,10	200
MAKO-53001		1.2	2,0 ± 0,2	0,15 ± 0,05	0,70	0,30 ± 0,10	200
MAKO-53002		1.5	2,0 ± 0,2	0,18 ± 0,05	0,85	0,32 ± 0,10	200
MAKO-53003	1/16	1.6	2,0 ± 0,3	0,15 ± 0,05	0,80	0,28 ± 0,10	200
MAKO-53004		2	2,5 ± 0,2	0,18 ± 0,05	0,60	0,28 ± 0,10	200
MAKO-53005	3/32	2.4	3,0 ± 0,3	0,18 ± 0,05	1,20	0,35 ± 0,10	200
MAKO-53006		2.5	3,0 ± 0,2	0,18 ± 0,05	1,30	0,38 ± 0,10	200
MAKO-53007		3	3,5 ± 0,2	0,18 ± 0,05	1,50	0,40 ± 0,10	200
MAKO-53008	1/8	3.2	3,5 ± 0,4	0,18 ± 0,05	1,60	0,40 ± 0,10	200
MAKO-53009		3.5	4,0 ± 0,2	0,22 ± 0,05	1,80	0,42 ± 0,10	200
MAKO-53010		4	4,5 ± 0,2	0,25 ± 0,05	2,00	0,45 ± 0,10	200
MAKO-53011		4.5	5,0 ± 0,2	0,25 ± 0,05	2,30	0,50 ± 0,10	100
MAKO-53012	3/16	4.8	5,2 ± 0,4	0,25 ± 0,05	2,40	0,50 ± 0,10	100
MAKO-53013		5	5,5 ± 0,2	0,25 ± 0,05	2,50	0,55 ± 0,10	100
MAKO-53014		6	6,5 ± 0,2	0,28 ± 0,05	3,00	0,55 ± 0,10	100
MAKO-53015	1/4	6.4	7,0 ± 0,4	0,28 ± 0,05	3,20	0,55 ± 0,10	100
MAKO-53016		7	7,5 ± 0,3	0,28 ± 0,05	3,50	0,55 ± 0,10	100
MAKO-53017		8	8,5 ± 0,3	0,28 ± 0,05	4,00	0,60 ± 0,10	100
MAKO-53018		9	9,5 ± 0,3	0,30 ± 0,08	4,50	0,60 ± 0,10	50
MAKO-53019	3/8	9.5	10,0 ± 0,5	0,30 ± 0,08	4,80	0,60 ± 0,10	100
MAKO-53020		10	10,5 ± 0,3	0,30 ± 0,08	5,00	0,60 ± 0,10	100
MAKO-53021		11	11,5 ± 0,3	0,30 ± 0,08	5,50	0,60 ± 0,10	100
MAKO-53022		12	12,5 ± 0,3	0,30 ± 0,08	6,00	0,60 ± 0,10	100
MAKO-53023	1/2	12.7	13,0 ± 0,5	0,30 ± 0,08	6,40	0,60 ± 0,10	100
MAKO-53024		13	13,5 ± 0,3	0,35 ± 0,10	6,50	0,65 ± 0,10	100
MAKO-53025		14	14,5 ± 0,3	0,35 ± 0,10	7,00	0,65 ± 0,10	100
MAKO-53025-15		15	15,5 ± 0,3	0,35 ± 0,10	7,00	0,65 ± 0,10	100
MAKO-53026		16	16,5 ± 0,4	0,40 ± 0,12	8,00	0,70 ± 0,10	100
MAKO-53027		17	17,5 ± 0,4	0,40 ± 0,12	8,50	0,70 ± 0,10	100
MAKO-53028		18	19,0 ± 0,5	0,40 ± 0,15	9,00	0,80 ± 0,15	100
MAKO-53029	3/4	19.1	20,5 ± 0,6	0,40 ± 0,15	9,50	0,80 ± 0,15	100
MAKO-53030	4/5	20	21,0 ± 0,6	0,40 ± 0,15	10,00	0,80 ± 0,15	100
MAKO-53031		22	23,0 ± 0,5	0,40 ± 0,15	11,00	0,80 ± 0,15	100
MAKO-53032	1	25.4	25,6 ± 0,7	0,50 ± 0,15	12,70	0,80 ± 0,15	50
MAKO-53033		30	31,5 ± 1,0	0,50 ± 0,15	15,00	0,90 ± 0,15	50
MAKO-53034	1-1/4	32	33,0 ± 0,7	0,50 ± 0,15	15,90	0,95 ± 0,15	50
MAKO-53035		35	36,5 ± 1,0	0,50 ± 0,15	17,50	0,95 ± 0,15	50
MAKO-53036	1-1/2	38	40,0 ± 0,7	0,50 ± 0,15	19,10	1,00 ± 0,15	50
MAKO-53037		40	41,5 ± 1,0	0,55 ± 0,15	20,00	1,00 ± 0,15	50
MAKO-53038	2	51	52,5 ± 0,7	0,55 ± 0,15	25,40	0,95 ± 0,15	25
MAKO-53039		60	60	0,60 ± 0,15	30,00	1,30 ± 0,20	25
MAKO-53040		70	70	0,65 ± 0,15	35,00	1,30 ± 0,20	25
MAKO-53041	3	76	80,0 ± 1,0	0,65 ± 0,15	38,10	1,30 ± 0,20	25
MAKO-53042		80	80	0,65 ± 0,15	40,00	1,46 ± 0,20	25
MAKO-53043		90	90	0,65 ± 0,15	45,00	1,46 ± 0,20	25
MAKO-53044	4	102	105,0 ± 1,0	0,65 ± 0,20	50,80	1,46 ± 0,20	25
MAKO-53045	5	120	120	0,65 ± 0,20	63,50	1,56 ± 0,20	25
MAKO-53046		150	150	0,65 ± 0,20	75,00	1,56 ± 0,20	25
MAKO-53047		180	180	0,65 ± 0,30	90,00	1,56 ± 0,20	25


2/1 HEAT SHRINK TUBING COLOURED

MM	INCH	PCS/BOX
1,6	1/16	200
2,4	3/32	200
2,5		200
3,2	1/8	200
3,5		200
4,8	3/16	100
5		100
6,4	1/4	100
7		100
9,5	3/8	100
10		100
12		100
12,7	1/2	100
16		100
19,1	3/4	100
20	4/5	100
25,4	1	50
32	1-1/4	50
35		50
38	1-1/2	50
51	2	50
70		25
76	3	25

TRANSPARENT WHITE YELLOW BLUE RED
GREEN GREY BROWN YELLOWGREEN

ADHESIVE 3/1 HEAT SHRINK TUBING

BEFORE mm	AFTER mm	ROLL/MT.
3.2	1	200 m
4.8	1.6	100 m
6.4	2	100 m
9.5	3	50 m
10	3	1.20 Length
12.7	4	1.20 Length
19.1	5.6	1.20 Length
28	9	1.20 Length
30	10	120 Length
35	10	1.20 Length
38	13	1.20 Length
43.2	12.7	1.20 Length
52	16	1.20 Length
75	22	1.20 Length
95	29	1.20 Length

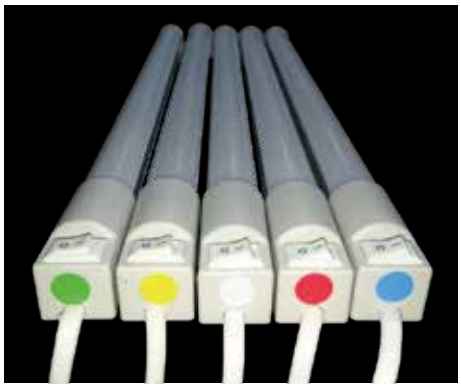









Range of Products;

- *Electronic thermostat for control panel board*
- *Panel Internal thermostat*
- *Corner plastic apparatus*
- *Plastic cover for W automat*
- *U Profile support rail*
- *Panel LED Lighting*
- *220 / 12 Voltage LED Panel lighting*
- *12 Voltage LED Panel lighting*
- *24 Voltage LED Panel lighting*

PANEL ACCESSORIES

ELECTRONIC THERMOSTATE FOR CONTROL PANEL BOARD



PTS T/1



PTS CT/2

CODE	TYPE	PCS/BOX
PTS T/1	Electronic Thermostat for Control Panel	1
PTS CT/2	Cooler & Heater for Control Panel Board 0 - 50 °C	1

PANEL INTERNAL THERMOSTATE











CODE	TYPE	PCS/BOX
PTHT	Panel Internal Heat Thermostate 0 - 60 C, NK, IP 20	1
PTVT	Panel Internal Cold Thermostate 0 - 60 C, NA, IP 20	1
PTVHT	Panel Internal Heat - Cold Thermostate 0 - 80 / 0-60 C, NK + NA, IP 20	1
PHG02	Mechanic Higrostate %10/90 RH, 1CO, IP 20	1

CORNER PLASTIC APPARATUS



NEW CODE	OLD CODE	TYPE	Pcs.
1100124	ONKA-4195	Right / Left Corner Plastic Apparatus	100

PLASTIC COVER FOR W AUTOMAT

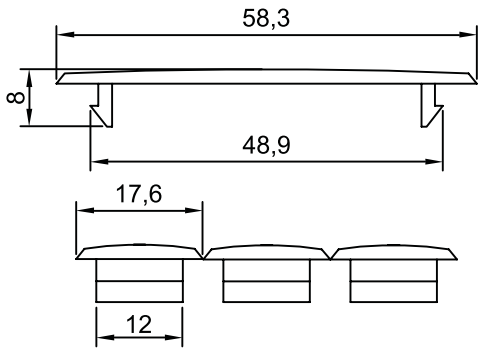





TECHNICAL DATA	
Material	PS
Temp.	-40 ºC, +140 ºC

	NEW CODE	OLD CODE	DESCRIPTIONS	BOX
RAL 9001	1140021	ONKA 7121	Plastic Cover For W Automat With 12 Strips	50
RAL 7035	1140022	ONKA 7122		50
RAL 7032	1140024	ONKA 7124		50


U PROFILE SUPPORT RAIL

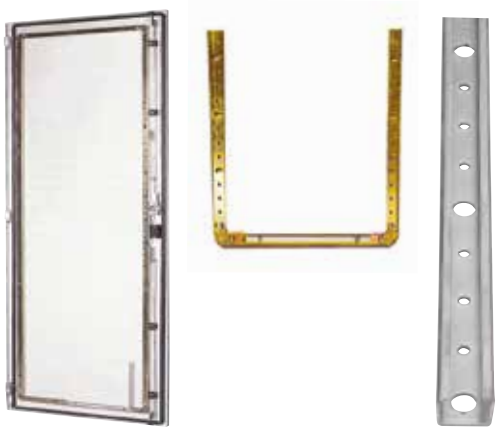

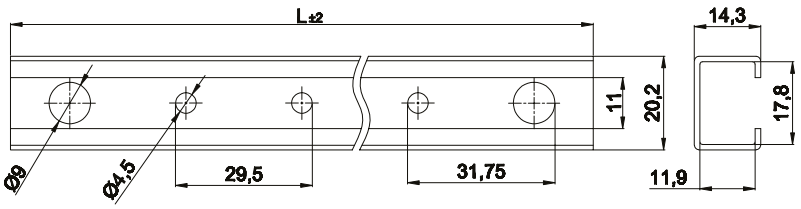


NEW CODE	OLD CODE	TYPE	Pcs.
1100120	ONKA- 4191	1 Metre U Profil (Cr3)	35
1100121	ONKA- 4192	2 Metre U Profil (Cr3)	35
1100122	ONKA- 4193	3 Metre U Profil (Cr3)	35

PANEL LED LIGHTING

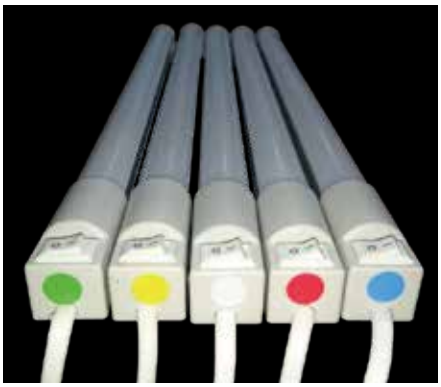





220 / 12 VOLTAGE LED PANEL LIGHTING

CODE	PRODUCT NAME (mm²)	VOLTAGE	L (mm)	H (mm)	Box Qty.
İR-22025	25 cm Led Panel Lighting	220 Volt	250	23	50
İR-22035	55 cm Led Panel Lighting	220 Volt	350	23	50
İR-22045	45 cm Led Panel Lighting	220 Volt	450	23	50
İR-22055	55 cm Led Panel Lighting	220 Volt	550	23	50
İR-22060	60 cm Led Panel Lighting	220 Volt	600	23	50

Voltage : 110/220 V AC	**Power** : 5 W	**IP** : 20
Frequency : 50/60 Hz.	**Colour** : White	

12 VOLTAGE LED PANEL LIGHTING

CODE	PRODUCT NAME (mm²)	VOLTAGE	L (mm)	H (mm)	Box Qty.
İR-12025	25 cm Led Panel Lighting	12 Volt	250	23	50
İR-12035	35 cm Led Panel Lighting	12 Volt	350	23	50
İR-12045	45 cm Led Panel Lighting	12 Volt	450	23	50
İR-12055	55 cm Led Panel Lighting	12 Volt	550	23	50
İR-12065	65 cm Led Panel Lighting	12 Volt	650	23	50

Voltage : 12 V AC	**Colour** : White
Power : 4 W	**IP** : 20

24 VOLTAGE LED PANEL LIGHTING

CODE	PRODUCT NAME (mm²)	VOLTAGE	L (mm)	H (mm)	Box Qty.
İR-24025	25 cm Led Panel Lighting	24 Volt	250	23	50
İR-24035	35 cm Led Panel Lighting	24 Volt	350	23	50
İR-24045	45 cm Led Panel Lighting	24 Volt	450	23	50
İR-24055	55 cm Led Panel Lighting	24 Volt	550	23	50
İR-24065	65 cm Led Panel Lighting	24 Volt	650	23	50

Voltage : 24 V AC	**Colour** : White
Power : 4 W	**IP** : 20











Range of Products;

- *Thermal Transfer Printer and Ribbons*
- *Component Markers*
- *Thin Panel Markers*
- *Thick Panel Marker*
- *Medium Thickness Panel Marker*
- *Wiring Solutions*
- *Tube Markers*
- *Plotter Printer and Dekafix Labelling System (For Terminal Blocks)*
- *KCG Type Cable Marker*
- *Marking Laber Slot For Cables*
- *Panel Markers*

MARKERS AND PRINTERS


THERMAL TRANSFER PRINTER AND RIBBONS



CODE	DISCRIPTIONS	PCS/BOX
ONKA-8912-AX	ARGOX CP2140 Thermal Printer	1
ONKA-8944-55	55 mm X 300 mt Black Ribbon	300 MT
ONKA-8944-110	110 mm x 300 mt Black Ribbon	300 MT
ONKA-8943-S11	11 mm X 2 X 20 mt Double Roll Label (White)	40 MT
ONKA-8943-S11S	11 mm X 2 X 20 mt Double Roll Label (Yellow)	40 MT
ONKA-8843-S4.9	4,9 mm X 5 X 20 mt Roll Label	100 MT

THERMAL TRANSFER PRINTER AND RIBBONS



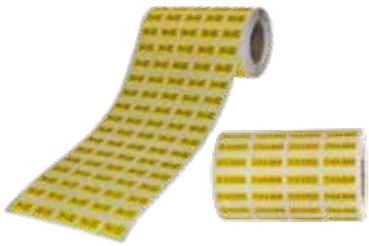



CODE	DISCRIPTIONS	COLUMN NO	PCS/BOX
ONKA-8920-515SE	5x15 mm Yellow Component Marker (ECO)	5	5000 Pcs
ONKA-8920-515S	5x15 mm Yellow Component Marker	5	5000 Pcs
ONKA-8920-515B	5x15 mm White Component Marker	5	5000 Pcs
ONKA-8920-915SV	9x15 mm Yellow Component Marker	5	5000 Pcs
ONKA-8920-915SBR	15x9 mm Yellow Component Marker	5	5000 Pcs
ONKA-8920-716S	16x7 mm Yellow Component Marker	5	5000 Pcs
ONKA-8920-915SE	9x15 mm Yellow Component Marker (ECO)	5	5000 Pcs
ONKA-8920-915SG	9X15 mm Silvermat Component Marker	5	2500 Pcs
ONKA-8920-516S	5x16,5 mm Yellow Component Marker	5	5000 Pcs
ONKA-8920-930S	9x30 mm Yellow Component Marker	3	1500 Pcs
ONKA-8920-912SE	9X12 mm Yellow Component Marker (ECO)	5	2500 Pcs
ONKA-8920-736SE	7x36 mm Yellow Component Marker (ECO)	1	1000 Pcs
ONKA-8920-736BE	7x36 mm White Component Marker (ECO)	1	1000 Pcs
ONKA-8920-2015S	20 mm X 15 mt Yellow Roll Marker for General Purposes	1	15 MT
ONKA-8920-1550S	15 mm X 50 mt Yellow Roll Marker for General Purposes	1	50 MT
ONKA-8920-3050S	30 mm X 50 mt Yellow Roll Marker for General Purposes	1	50 MT

THIN PANEL MARKERS



CODE	DISCRIPTIONS	COLUMN NO	PCS/BOX
ONKA-8921-80100SW	80x100 mm Silvermat Thin Panel Marker(ECO)	1	100 Pcs
ONKA-8921-5075SW	50x75 mm Silvermat Thin Panel Marker(ECO)	1	1000 Pcs
ONKA-8921-2575SW	25x75 mm Silvermat Thin Panel Marker(ECO)	1	2000 Pcs
ONKA-8921-1326SW	13x26 mm Silvermat Thin Panel Marker(ECO)	3	1500 Pcs
ONKA-8921-40100SW	40x100 mm Silvermat Thin Panel Marker(ECO)	1	500 Pcs
ONKA-8921-1545SW	15x45 mm Silvermat Thin Panel Marker(ECO)	1	1000 Pcs
ONKA-8921-1527SW	15x27 mm Silvermat Thin Panel Marker(ECO)	1	1000 Pcs
ONKA-8921-50100SW	50x100 mm Silvermat Thin Panel Marker(ECO)	1	1000 Pcs

MEDIUM THICKNESS PANEL MARKER



CODE	DISCRIPTIONS	COLUMN NO	PCS/BOX
ONKA-8923-1545OG	15X45 mm Medium Thick Panel Marker Silver	1	1000 Pcs
ONKA-8923-1527OG	15X27 mm Medium Thick Panel Marker Silver	3	1500 Pcs
ONKA-8923-50100OG	50X100 mm Medium Thick Panel Marker Silver	1	250 Pcs
ONKA-8923-3065OG	30X65 mm Medium Thick Panel Marker Silver	1	500 Pcs
ONKA-8923-1545OB	15X45 mm Medium Thick Panel Marker White	1	500 Pcs
ONKA-8923-1545OK	15X45 mm Medium Thick Panel Marker Red	1	500 Pcs
ONKA-8923-1545OS	15X45 mm Medium Thick Panel Marker Yellow	1	500 Pcs
ONKA-8923-1527OS	15X27 mm Medium Thick Panel Marker Yellow	1	500 Pcs
ONKA-8923-1527OB	15X27 mm Medium Thick Panel Marker White	1	500 Pcs
ONKA-8923-1527OK	15X27 mm Medium Thick Panel Marker Red	1	750 Pcs
ONKA-8923-3065OK	30X65 mm Medium Thick Panel Marker Red	1	250 Pcs
ONKA-8923-3065OB	30X65 mm Medium Thick Panel Marker White	1	250 Pcs
ONKA-8923-3065OS	30X65 mm Medium Thick Panel Marker Yellow	1	250 Pcs
ONKA-8923-50100OB	50X100 mm Medium Thick Panel Marker White	1	250 Pcs
ONKA-8923-50100OK	50X100 mm Medium Thick Panel Marker Red	1	250 Pcs
ONKA-8923-50100OS	50X100 mm Medium Thick Panel Marker Yellow	1	250 Pcs
Onka-8923-1827OG	18X27 mm Orta Kalın Pano Etiketi Gri	1	500 Pcs
Onka-8923-1827OB	18X27 mm Medium Thick Panel Marker White	1	500 Pcs
Onka-8923-1827OK	18X27 mm Medium Thick Panel Marker Red	1	500 Pcs
Onka-8923-1827OS	18X27 mm Medium Thick Panel Marker Yellow	1	500 Pcs

THICK PANEL MARKER




CODE	DISCRIPTIONS	COLUMN NO	PCS/BOX
ONKA-8922-1227P	12,5x27 mm Gray Thick Panel Marker	1	200 Pcs
ONKA-8922-1545P	15x45 mm Gray Thick Panel Marker	1	125 Pcs
ONKA-8922-1527P	15x27 mm Gray Thick Panel Marker	1	150 Pcs
ONKA-8922-1827P	18x27 mm Gray Thick Panel Marker	1	150 Pcs
ONKA-8922-1835P	18x35 mm Gray Thick Panel Marker	1	125 Pcs
ONKA-8922-3040P	30x40 mm Gray Thick Panel Marker (Buton)	1	100 Pcs
ONKA-8922-3060P	30x60 mm Gray Thick Panel Marker	1	125 Pcs
ONKA-8922-4590P	45x90 mm Gray Thick Panel Marker	1	100 Pcs


WIRING SOLUTIONS



CODE	DISCRIPTIONS	COLUMN NO	PCS/BOX
ONKA-8924-1510B	15x10 mm (1.5-2.5-4-6-10mm²) Spiral Cable Marker (White)	4	1000 Pcs
ONKA-8924-1915B	19x15 mm (1.5-2.5-4-6 mm²) Spiral Cable Marker (White)	4	2000 Pcs
ONKA-8924-1925B	19x25 mm (10-16 mm²) Spiral Cable Marker (White)	3	1500 Pcs
ONKA-8924-1938B	19x38 mm (25-35-50 mm²) Spiral Cable Marker (White)	2	2000 Pcs
ONKA-8924-1915S	19x15 mm (1.5-2.5-4-6 mm²) Spiral Cable Marker (Yellow)	4	2000 Pcs
ONKA-8924-1925S	19x25 mm (10 -16 mm²) Spiral Cable Marker (Yellow)	3	1500 Pcs
ONKA-8924-1938S	19x38 mm (25-35-50 mm²) Spiral Cable Marker (Yellow)	2	2000 Pcs
ONKA-8924-38180S	38x180 mm Spiral Cable Marker (Yellow)	2	720 Pcs

TUBE MARKERS (Transparent Tube Markers)

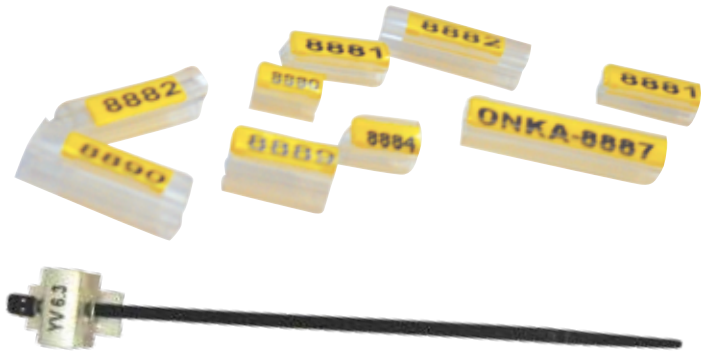

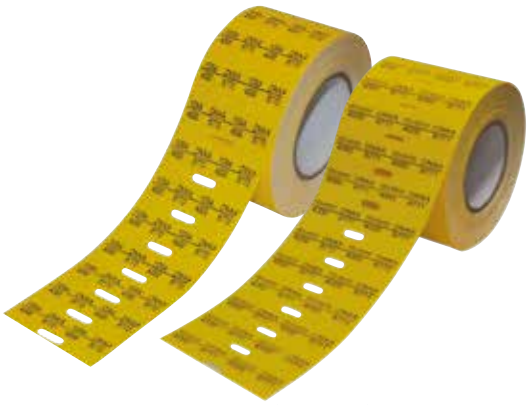

CODE	DISCRIPTIONS	COLUMN NO	PCS/BOX
ONKA-8925-104B	10x4 mm Transparent Tube Markers White	4	4000 Pcs
ONKA-8925-154B	15x4 mm Transparent Tube Markers White	4	4000 Pcs
ONKA-8925-204B	20x4 mm Transparent Tube Markers White	2	3000 Pcs
ONKA-8925-304B	30x4 mm Transparent Tube Markers White	2	2500 Pcs
ONKA-8925-104S	10x4 mm Transparent Tube Markers Yellow	4	4000 Pcs
ONKA-8925-154S	15x4 mm Transparent Tube Markers Yellow	4	4000 Pcs
ONKA-8925-204S	20x4 mm Transparent Tube Markers Yellow	2	3000 Pcs
ONKA-8925-304S	30x4 mm Transparent Tube Markers Yellow	2	2500 Pcs

TUBE MARKERS (Cable Tie)

CODE	DISCRIPTIONS	PCS/BOX
ONKA-8926-101	10 mm Transparent Tube / 0,5-1,5 mm^2 Cable Tie	1000 Pcs
ONKA-8926-151	15 mm Transparent Tube / 0,5-1,5 mm^2 Cable Tie	1000 Pcs
ONKA-8926-201	20 mm Transparent Tube / 0,5-1,5 mm^2 Cable Tie	500 Pcs
ONKA-8926-301	30 mm Transparent Tube / 0,5-1,5 mm^2 Cable Tie	500 Pcs
ONKA-8926-102	10 mm Transparent Tube / 2,5-4 mm^2 Cable Tie	1000 Pcs
ONKA-8926-152	15 mm Transparent Tube / 2,5-4 mm^2 Cable Tie	1000 Pcs
ONKA-8926-202	20 mm Transparent Tube / 2,5-4 mm^2 Cable Tie	500 Pcs
ONKA-8926-302	30 mm Transparent Tube / 2,5-4 mm^2 Cable Tie	500 Pcs
ONKA-8926-103	10 mm Transparent Tube / 4-6 mm^2 Cable Tie	1000 Pcs
ONKA-8926-153	15 mm Transparent Tube / 4-6 mm^2 Cable Tie	1000 Pcs
ONKA-8926-203	20 mm Transparent Tube / 4-6 mm^2 Cable Tie	500 Pcs
ONKA-8926-303	30 mm Transparent Tube / 4-6 mm^2 Cable Tie	500 Pcs
ONKA-8926-420	20x4 mm Transparent Tube / Cable Tie (General Purposes)	1000 Pcs

HEAT SHRINKS AND MARKING SYSTEM



Feasible for marking with black ribbon between 2,5-100 mm in any calour of ground onka thermal printer provides continuous marking for 16mm and above, possible with apparatus support for 2,5-16 mm



PLOTTER PRINTER AND DEKAFIX LABELLING SYSTEM (FOR TERMINAL BLOCKS)





SINGLE USE PEN




FILLABLE PEN



CODE	DESCRIPTIONS	PCS/BOX
Y111 8717	A4 Plotter Printer	1
Y42 52002	025 Single use plotter pen (Black)	1
Y145 1849	025 Fillable plotter pen	1
Y145 1978	Ink (Black) 30 ml	1

PLOTTER PRINTER AND DEKAFIX MARKING SYSTEMS (FOR TERMINAL BLOCKS)

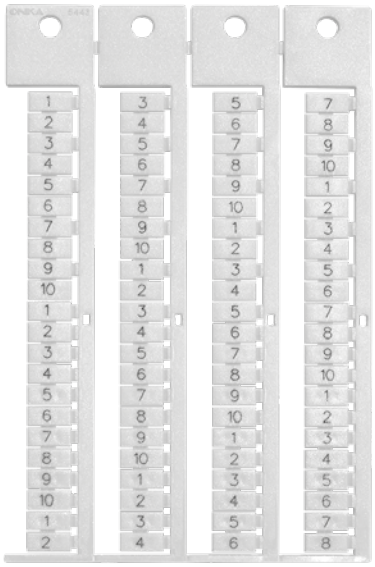





TECHNICAL DATA	
Material	PC
Temp.	-40°C, +140°C
Printing Colour	Black
Dimension	6 x 10 mm

ORDERING DATA	
Printing Variations	Horizontal print, vertical print, number, letters, marks
Character of No.	Horizontal Max. 6 Vertical Max. 3
Special Printing	Specify colour and characters for special printing

NEW CODE	OLD CODE	DESCRIPTIONS	PCS / BOX
1060198	ONKA-5443	OD10-5P Combined Label Printless (for 1,5 mm^2 terminal blocks)	880
1060199	ONKA-5444	OD10-5P Combined Label Printed (for 1,5 mm^2 terminal blocks)	880
1060192	ONKA-4440	OD10-6P Combined Label Printless (for 2,5 mm^2 terminal blocks)	720
1060193	ONKA-4441	OD10-6P Combined Label Printed (for 2,5 mm^2 terminal blocks)	720
1060194	ONKA-4442	OD10-6P One by one plucked label marker printless	720
1060195	ONKA-4443	OD10-6P One by one plucked label marker printed	720
1060196	ONKA-4390	OD10-6P Combined Label Printless (for 4 mm^2 terminal blocks)	640
1060197	ONKA-4391	OD10-6P Combined Label Printed (for 4 mm^2 terminal blocks)	640
1060188	ONKA-2630	OD10-8P Combined Label Printless (for 6 -10 mm^2 and bigger size terminal blocks)	560
1060189	ONKA-2631	OD10-8P Combined Label Printed (for 6 -10 mm^2 and bigger size terminal blocks)	560

OD10 PRINTED AND PRESSED LABELS

OD10-6P Terminal markings can be applied to all products of ONKA production. With the OD10-6P Decafix options, it is possible to create many alternatives in the marking field. Short number sequences, letters and marks can be clearly written on the OD10-6P Decafix for marking applications.

Also; All variations requested by the user can be done in line with the scope of the product.

• Designed to be united for rapid application.

• All 2.5 mm² terminals can be installed with a single operation with 10 decafixes at once. For other products; it is done one by one.

• In the vertical position max. 3 characters, horizontally max. Up to 4 characters can be written.

• Special printing options can be applied according to user requests.

• Due to special non-durable ink, only OD10-6P Decafix can be printed with buffer printing method.







TECHNICAL DATA	
Material	PA6.6
Temp.	-40°C, +140°C
Printing Colour	Black

ORDERING DATA	
Box Pcs	300 Pcs 1 Card: 10x3 = 300 dekafix
Dimension	OD10 - 1,5 mm²: 4,8 x 10 mm OD10 - 2,5 mm²: 5,5 x 10 mm OD10 - 4 mm² : 6,2 x 10 mm
Printing Variations	Horizontal print, vertical print, number, letters, marks
Character of No.	Horizontal Max. 4 Vertical Max. 3
Special Printing	Specify colour and characters for special printing

DEKAFIX MARKING SYSTEM (FOR TERMINAL BLOCKS) OD10 (1,5 mm²)

CODE	DESCRIPTIONS	PCS / BOX
1060298	OD10 1,5 Dekafix Printless	300
1060299	OD10 1,5 Dekafix "0" Printed	300
1060300	OD10 1,5 Dekafix "1" Printed	300
1060301	OD10 1,5 Dekafix "2" Printed	300
1060302	OD10 1,5 Dekafix "3" Printed	300
1060303	OD10 1,5 Dekafix "4" Printed	300
1060304	OD10 1,5 Dekafix "5" Printed	300
1060305	OD10 1,5 Dekafix "6" Printed	300
1060306	OD10 1,5 Dekafix "7" Printed	300
1060307	OD10 1,5 Dekafix "8" Printed	300
1060308	OD10 1,5 Dekafix "9" Printed	300
1060309	OD10 1,5 Dekafix "10" Printed	300
1060310	OD10 1,5 Dekafix "1-10" Printed	300
1060311	OD10 1,5 Dekafix "11-20" Printed	300
1060312	OD10 1,5 Dekafix "21-30" Printed	300
1060313	OD10 1,5 Dekafix "31-40" Printed	300
1060314	OD10 1,5 Dekafix "41-50" Printed	300
1060315	OD10 1,5 Dekafix "51-60" Printed	300
1060316	OD10 1,5 Dekafix "61-70" Printed	300
1060317	OD10 1,5 Dekafix "71-80" Printed	300
1060318	OD10 1,5 Dekafix "81-90" Printed	300
1060319	OD10 1,5 Dekafix "91-100" Printed	300
1060320	OD10 1,5 Dekafix "101-110" Printed	300
1060321	OD10 1,5 Dekafix "111-120" Printed	300
1060322	OD10 1,5 Dekafix "121-130" Printed	300
1060323	OD10 1,5 Dekafix "131-140" Printed	300
1060324	OD10 1,5 Dekafix "141-150" Printed	300
1060325	OD10 1,5 Dekafix "151-160" Printed	300
1060326	OD10 1,5 Dekafix "161-170" Printed	300
1060327	OD10 1,5 Dekafix "171-180" Printed	300
1060328	OD10 1,5 Dekafix "181-190" Printed	300
1060329	OD10 1,5 Dekafix "191-200" Printed	300
1060330	OD10 1,5 Dekafix "10,20,30,…,100" Printed	300

CODE	DESCRIPTIONS	PCS / BOX
1060331	OD10 1,5 Dekafix "+" Printed	300
1060332	OD10 1,5 Dekafix " -" Printed	300
1060333	OD10 1,5 Dekafix "EARTH SIGN" Printed	300
1060334	OD10 1,5 Dekafix " Mp" Printed	300
1060335	OD10 1,5 Dekafix " PE" Printed	300
1060336	OD10 1,5 Dekafix "L1" Printed	300
1060337	OD10 1,5 Dekafix "L2" Printed	300
1060338	OD10 1,5 Dekafix "L3" Printed	300
1060339	OD10 1,5 Dekafix "A" Printed	300
1060340	OD10 1,5 Dekafix "B" Printed	300
1060341	OD10 1,5 Dekafix "C" Printed	300
1060342	OD10 1,5 Dekafix "D" Printed	300
1060343	OD10 1,5 Dekafix "E" Printed	300
1060344	OD10 1,5 Dekafix "F" Printed	300
1060345	OD10 1,5 Dekafix "G" Printed	300
1060346	OD10 1,5 Dekafix "H" Printed	300
1060347	OD10 1,5 Dekafix "I" Printed	300
1060348	OD10 1,5 Dekafix "J" Printed	300
1060349	OD10 1,5 Dekafix "K" Printed	300
1060350	OD10 1,5 Dekafix "L" Printed	300
1060351	OD10 1,5 Dekafix "M" Printed	300
1060352	OD10 1,5 Dekafix "N" Printed	300
1060353	OD10 1,5 Dekafix "O" Printed	300
1060354	OD10 1,5 Dekafix "P" Printed	300
1060355	OD10 1,5 Dekafix "Q" Printed	300
1060356	OD10 1,5 Dekafix "R" Printed	300
1060357	OD10 1,5 Dekafix "S" Printed	300
1060358	OD10 1,5 Dekafix "T" Printed	300
1060359	OD10 1,5 Dekafix "U" Printed	300
1060360	OD10 1,5 Dekafix "V" Printed	300
1060361	OD10 1,5 Dekafix "W" Printed	300
1060362	OD10 1,5 Dekafix "X" Printed	300
1060363	OD10 1,5 Dekafix "Y" Printed	300
1060364	OD10 1,5 Dekafix "Z" Printed	300

DEKAFIX MARKING SYSTEM (FOR TERMINAL BLOCKS) OD10 (2,5 mm²)

CODE	DESCRIPTIONS	PCS / BOX
1060365	OD10 2,5 Dekafix Printless	300
1060366	OD10 2,5 Dekafix "0" Printed	300
1060367	OD10 2,5 Dekafix "1" Printed	300
1060368	OD10 2,5 Dekafix "2" Printed	300
1060369	OD10 2,5 Dekafix "3" Printed	300
1060370	OD10 2,5 Dekafix "4" Printed	300
1060371	OD10 2,5 Dekafix "5" Printed	300
1060372	OD10 2,5 Dekafix "6" Printed	300
1060373	OD10 2,5 Dekafix "7" Printed	300
1060374	OD10 2,5 Dekafix "8" Printed	300
1060375	OD10 2,5 Dekafix "9" Printed	300
1060376	OD10 2,5 Dekafix "10" Printed	300
1060377	OD10 2,5 Dekafix "1-10" Printed	300
1060378	OD10 2,5 Dekafix "11-20" Printed	300
1060379	OD10 2,5 Dekafix "21-30" Printed	300
1060380	OD10 2,5 Dekafix "31-40" Printed	300
1060381	OD10 2,5 Dekafix "41-50" Printed	300
1060382	OD10 2,5 Dekafix "51-60" Printed	300
1060383	OD10 2,5 Dekafix "61-70" Printed	300
1060384	OD10 2,5 Dekafix "71-80" Printed	300
1060385	OD10 2,5 Dekafix "81-90" Printed	300
1060386	OD10 2,5 Dekafix "91-100" Printed	300
1060387	OD10 2,5 Dekafix "101-110" Printed	300
1060388	OD10 2,5 Dekafix "111-120" Printed	300
1060389	OD10 2,5 Dekafix "121-130" Printed	300
1060390	OD10 2,5 Dekafix "131-140" Printed	300
1060391	OD10 2,5 Dekafix "141-150" Printed	300
1060392	OD10 2,5 Dekafix "151-160" Printed	300
1060393	OD10 2,5 Dekafix "161-170" Printed	300
1060394	OD10 2,5 Dekafix "171-180" Printed	300
1060395	OD10 2,5 Dekafix "181-190" Printed	300
1060396	OD10 2,5 Dekafix "191-200" Printed	300
1060397	OD10 2,5 Dekafix "10,20,30,…,100" Printed	300

CODE	DESCRIPTIONS	PCS / BOX
1060398	OD10 2,5 Dekafix "+" Printed	300
1060399	OD10 2,5 Dekafix " -" Printed	300
1060400	OD10 1,5 Dekafix "EARTH SIGN" Printed	300
1060401	OD10 2,5 Dekafix " Mp" Printed	300
1060402	OD10 2,5 Dekafix " PE" Printed	300
1060403	OD10 2,5 Dekafix "L1" Printed	300
1060404	OD10 2,5 Dekafix "L2" Printed	300
1060405	OD10 2,5 Dekafix "L3" Printed	300
1060406	OD10 2,5 Dekafix "A" Printed	300
1060407	OD10 2,5 Dekafix "B" Printed	300
1060408	OD10 2,5 Dekafix "C" Printed	300
1060409	OD10 2,5 Dekafix "D" Printed	300
1060410	OD10 2,5 Dekafix "E" Printed	300
1060411	OD10 2,5 Dekafix "F" Printed	300
1060412	OD10 2,5 Dekafix "G" Printed	300
1060413	OD10 2,5 Dekafix "H" Printed	300
1060414	OD10 2,5 Dekafix "I" Printed	300
1060415	OD10 2,5 Dekafix "J" Printed	300
1060416	OD10 2,5 Dekafix "K" Printed	300
1060417	OD10 2,5 Dekafix "L" Printed	300
1060418	OD10 2,5 Dekafix "M" Printed	300
1060419	OD10 2,5 Dekafix "N" Printed	300
1060420	OD10 2,5 Dekafix "O" Printed	300
1060421	OD10 2,5 Dekafix "P" Printed	300
1060422	OD10 2,5 Dekafix "Q" Printed	300
1060423	OD10 2,5 Dekafix "R" Printed	300
1060424	OD10 2,5 Dekafix "S" Printed	300
1060425	OD10 2,5 Dekafix "T" Printed	300
1060426	OD10 2,5 Dekafix "U" Printed	300
1060427	OD10 2,5 Dekafix "V" Printed	300
1060428	OD10 2,5 Dekafix "W" Printed	300
1060429	OD10 2,5 Dekafix "X" Printed	300
1060430	OD10 2,5 Dekafix "Y" Printed	300
1060431	OD10 2,5 Dekafix "Z" Printed	300

DEKAFIX MARKING SYSTEM (FOR TERMINAL BLOCKS) OD10 (4 mm²)

CODE	DESCRIPTIONS	PCS / BOX
1060432	OD10 4 Dekafix Printless	300
1060433	OD10 4 Dekafix "0" Printed	300
1060434	OD10 4 Dekafix "1" Printed	300
1060435	OD10 4 Dekafix "2" Printed	300
1060436	OD10 4 Dekafix "3" Printed	300
1060437	OD10 4 Dekafix "4" Printed	300
1060438	OD10 4 Dekafix "5" Printed	300
1060439	OD10 4 Dekafix "6" Printed	300
1060440	OD10 4 Dekafix "7" Printed	300
1060441	OD10 4 Dekafix "8" Printed	300
1060442	OD10 4 Dekafix "9" Printed	300
1060443	OD10 4 Dekafix "10" Printed	300
1060444	OD10 4 Dekafix "1-10" Printed	300
1060445	OD10 4 Dekafix "11-20" Printed	300
1060446	OD10 4 Dekafix "21-30" Printed	300
1060447	OD10 4 Dekafix "31-40" Printed	300
1060448	OD10 4 Dekafix "41-50" Printed	300
1060449	OD10 4 Dekafix "51-60" Printed	300
1060450	OD10 4 Dekafix "61-70" Printed	300
1060451	OD10 4 Dekafix "71-80" Printed	300
1060452	OD10 4 Dekafix "81-90" Printed	300
1060453	OD10 4 Dekafix "91-100" Printed	300
1060454	OD10 4 Dekafix "101-110" Printed	300
1060455	OD10 4 Dekafix "111-120" Printed	300
1060456	OD10 4 Dekafix "121-130" Printed	300
1060457	OD10 4 Dekafix "131-140" Printed	300
1060458	OD10 4 Dekafix "141-150" Printed	300
1060459	OD10 4 Dekafix "151-160" Printed	300
1060460	OD10 4 Dekafix "161-170" Printed	300
1060461	OD10 4 Dekafix "171-180" Printed	300
1060462	OD10 4 Dekafix "181-190" Printed	300
1060463	OD10 4 Dekafix "191-200" Printed	300
1060464	OD10 4 Dekafix "10,20,30,…,100" Printed	300

CODE	DESCRIPTIONS	PCS / BOX
1060465	OD10 4 Dekafix "+" Printed	300
1060466	OD10 4 Dekafix " -" Printed	300
1060467	OD10 1,5 Dekafix "EARTH SIGN" Printed	300
1060468	OD10 4 Dekafix " Mp" Printed	300
1060469	OD10 4 Dekafix " PE" Printed	300
1060470	OD10 4 Dekafix "L1" Printed	300
1060471	OD10 4 Dekafix "L2" Printed	300
1060472	OD10 4 Dekafix "L3" Printed	300
1060473	OD10 4 Dekafix "A" Printed	300
1060474	OD10 4 Dekafix "B" Printed	300
1060475	OD10 4 Dekafix "C" Printed	300
1060476	OD10 4 Dekafix "D" Printed	300
1060477	OD10 4 Dekafix "E" Printed	300
1060478	OD10 4 Dekafix "F" Printed	300
1060479	OD10 4 Dekafix "G" Printed	300
1060480	OD10 4 Dekafix "H" Printed	300
1060481	OD10 4 Dekafix "I" Printed	300
1060482	OD10 4 Dekafix "J" Printed	300
1060483	OD10 4 Dekafix "K" Printed	300
1060484	OD10 4 Dekafix "L" Printed	300
1060485	OD10 4 Dekafix "M" Printed	300
1060486	OD10 4 Dekafix "N" Printed	300
1060487	OD10 4 Dekafix "O" Printed	300
1060488	OD10 4 Dekafix "P" Printed	300
1060489	OD10 4 Dekafix "Q" Printed	300
1060490	OD10 4 Dekafix "R" Printed	300
1060491	OD10 4 Dekafix "S" Printed	300
1060492	OD10 4 Dekafix "T" Printed	300
1060493	OD10 4 Dekafix "U" Printed	300
1060494	OD10 4 Dekafix "V" Printed	300
1060495	OD10 4 Dekafix "W" Printed	300
1060496	OD10 4 Dekafix "X" Printed	300
1060497	OD10 4 Dekafix "Y" Printed	300
1060498	OD10 4 Dekafix "Z" Printed	300

OD5 PRINTED AND PRESSED LABELS

OD5 T erminal markings c an b e applied to all p roducts of ONKA production. With the OD5 label options, it offers the possibility to create many alternatives in the marking field. Short number sequences, letters and marks can be clearly written on the OD5 Labeling for labeling the product.

Also; All variations requested by the user can be done in line with the scope of the product.


• Designed to be united for rapid installation.


• For 10 x 1.5 mm² terminal blocks, it provides fast operation. For other products; It is done One by one.

• Maximum 3 characters can be written.

• Special printing options can be applied according to user requests.

• With the special non-durable ink, it can be printed with only buffer printing method for OD5 Labels.

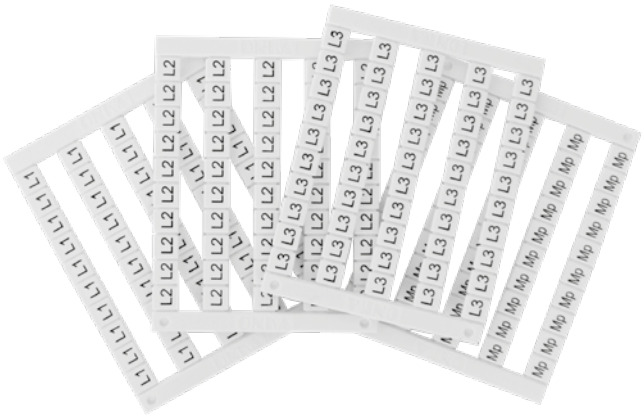

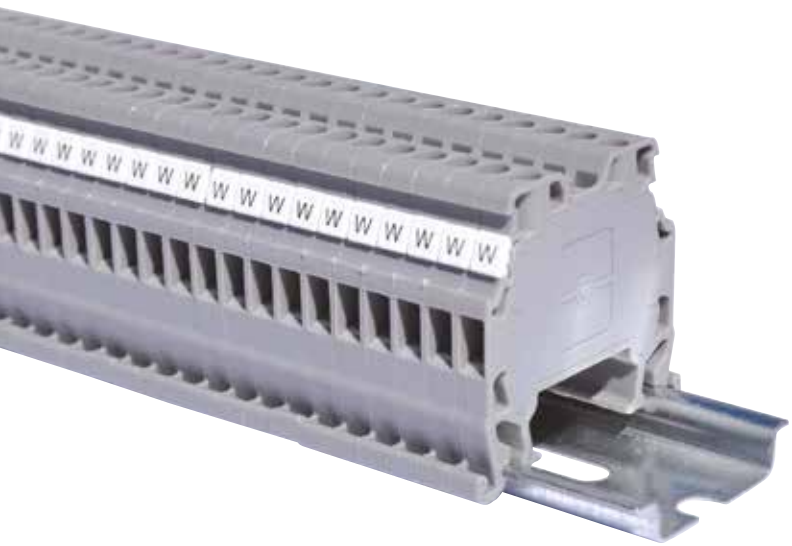

TECHNICAL DATA	
Material	PA6.6
Temp.	-40°C, +140°C
Printing Colour	Black


ORDERING DATA	
Box Pcs	500 Pcs 1 Card: 10x5 = 50 dekafix
Dimension	5 x 5 mm
Printing Variations	Horizontal print, vertical print, number, letters, marks
Character of No.	Horizontal Max. 3 Vertical Max. 3
Special Printing	Specify colour and characters for special printing

DEKAFIX MARKING SYSTEM (FOR TERMINAL BLOCKS) OD5-5

CODE	DESCRIPTIONS	PCS / BOX
1060200	OD5-5 Dekafix Printless	500
1060201	OD5-5 Dekafix "SPECIAL PRINT"	500
1060212	OD5-5 Dekafix "0" Printed	500
1060213	OD5-5 Dekafix "1" Printed	500
1060214	OD5-5 Dekafix "2" Printed	500
1060215	OD5-5 Dekafix "3" Printed	500
1060216	OD5-5 Dekafix "4" Printed	500
1060217	OD5-5 Dekafix "5" Printed	500
1060218	OD5-5 Dekafix "6" Printed	500
1060219	OD5-5 Dekafix "7" Printed	500
1060220	OD5-5 Dekafix "8" Printed	500
1060221	OD5-5 Dekafix "9" Printed	500
1060222	OD5-5 Dekafix "10" Printed	500
1060223	OD5-5 Dekafix "1-10" Printed	500
1060224	OD5-5 Dekafix "11-20" Printed	500
1060225	OD5-5 Dekafix "21-30" Printed	500
1060226	OD5-5 Dekafix "31-40" Printed	500
1060227	OD5-5 Dekafix "41-50" Printed	500
1060228	OD5-5 Dekafix "51-60" Printed	500
1060229	OD5-5 Dekafix "61-70" Printed	500
1060230	OD5-5 Dekafix "71-80" Printed	500
1060231	OD5-5 Dekafix "81-90" Printed	500
1060232	OD5-5 Dekafix "91-100" Printed	500
1060233	OD5-5 Dekafix "101-110" Printed	500
1060234	OD5-5 Dekafix "111-120" Printed	500
1060235	OD5-5 Dekafix "121-130" Printed	500
1060236	OD5-5 Dekafix "131-140" Printed	500
1060237	OD5-5 Dekafix "141-150" Printed	500
1060238	OD5-5 Dekafix "151-160" Printed	500
1060239	OD5-5 Dekafix "161-170" Printed	500
1060240	OD5-5 Dekafix "171-180" Printed	500
1060241	OD5-5 Dekafix "181-190" Printed	500
1060242	OD5-5 Dekafix "191-200" Printed	500
1060243	OD5-5 Dekafix "10,20,30,…,100" Printed	500
1060244	OD5-5 Dekafix "1-50" Printed	500
1060245	OD5-5 Dekafix "51-100" Printed	500
1060246	OD5-5 Dekafix "101-150" Printed	500
1060247	OD5-5 Dekafix "151-200" Printed	500
1060248	OD5-5 Dekafix "201-250" Printed	500
1060249	OD5-5 Dekafix "251-300" Printed	500
1060250	OD5-5 Dekafix "301-350" Printed	500
1060251	OD5-5 Dekafix "351-400" Printed	500
1060252	OD5-5 Dekafix "401-450" Printed	500
1060253	OD5-5 Dekafix "451-500" Printed	500


CODE	DESCRIPTIONS	PCS / BOX
1060254	OD5-5 Dekafix "501-550" Printed	500
1060255	OD5-5 Dekafix "551-600" Printed	500
1060256	OD5-5 Dekafix "601-650" Printed	500
1060257	OD5-5 Dekafix "651-700" Printed	500
1060258	OD5-5 Dekafix "701-750" Printed	500
1060259	OD5-5 Dekafix "751-800" Printed	500
1060260	OD5-5 Dekafix "801-850" Printed	500
1060261	OD5-5 Dekafix "851-900" Printed	500
1060262	OD5-5 Dekafix "901-950" Printed	500
1060263	OD5-5 Dekafix "951-999" Printed	500
1060264	OD5-5 Dekafix "+" Printed	500
1060265	OD5-5 Dekafix " -" Printed	500
1060266	OD5-5 Dekafix "EARTH SIGN" Printed	500
1060267	OD5-5 Dekafix " Mp" Printed	500
1060268	OD5-5 Dekafix " PE" Printed	500
1060269	OD5-5 Dekafix "L1" Printed	500
1060270	OD5-5 Dekafix "L2" Printed	500
1060271	OD5-5 Dekafix "L3" Printed	500
1060272	OD5-5 Dekafix "A" Printed	500
1060273	OD5-5 Dekafix "B" Printed	500
1060274	OD5-5 Dekafix "C" Printed	500
1060275	OD5-5 Dekafix "D" Printed	500
1060276	OD5-5 Dekafix "E" Printed	500
1060277	OD5-5 Dekafix "F" Printed	500
1060278	OD5-5 Dekafix "G" Printed	500
1060279	OD5-5 Dekafix "H" Printed	500
1060280	OD5-5 Dekafix "I" Printed	500
1060281	OD5-5 Dekafix "J" Printed	500
1060282	OD5-5 Dekafix "K" Printed	500
1060283	OD5-5 Dekafix "L" Printed	500
1060284	OD5-5 Dekafix "M" Printed	500
1060285	OD5-5 Dekafix "N" Printed	500
1060286	OD5-5 Dekafix "O" Printed	500
1060287	OD5-5 Dekafix "P" Printed	500
1060288	OD5-5 Dekafix "Q" Printed	500
1060289	OD5-5 Dekafix "R" Printed	500
1060290	OD5-5 Dekafix "S" Printed	500
1060291	OD5-5 Dekafix "T" Printed	500
1060292	OD5-5 Dekafix "U" Printed	500
1060293	OD5-5 Dekafix "V" Printed	500
1060294	OD5-5 Dekafix "W" Printed	500
1060295	OD5-5 Dekafix "X" Printed	500
1060296	OD5-5 Dekafix "Y" Printed	500
1060297	OD5-5 Dekafix "Z" Printed	500

KCG TYPE CABLE MARKER

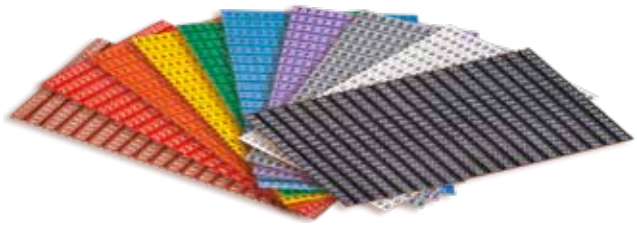





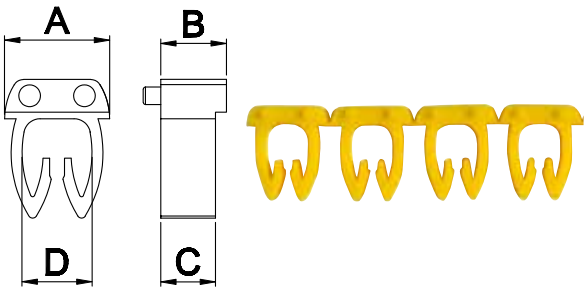

	NO	A	B	C	D
DIMENSIONS (mm)	1	4,4	3	2,5	2,7
	2	5	3	2,5	3,2
	3	7,4	3	2,5	4,9

TECHNICAL DATA	
MATERIAL	PA6.6
TEMPERATURE	-40 ºC, +140 ºC
PRESS COLOR	Black & White
CABLE SECTION	No1 : 0,5 - 1 mm² No2 : 1,50 - 2,50 mm² No3 : 4,00 - 6,00 mm²

NO:1 **0,75 - 1,50 mm²**

NEW CODE	OLD CODE	DESCIRIPTIONS	BOX
1150006	ONKA-9848	0 PRINTED	400/20.000
1150007	ONKA-9849	1 PRINTED	400/20.000
1150013	ONKA-9852	2 PRINTED	400/20.000
1150014	ONKA-9853	3 PRINTED	400/20.000
1150015	ONKA-9854	4 PRINTED	400/20.000
1150016	ONKA-9855	5 PRINTED	400/20.000
1150017	ONKA-9856	6 PRINTED	400/20.000
1150018	ONKA-9857	7 PRINTED	400/20.000
1150019	ONKA-9858	8 PRINTED	400/20.000
1150020	ONKA-9859	9 PRINTED	400/20.000
1150027	ONKA-9866	A PRINTED	400/20.000
1150028	ONKA-9867	B PRINTED	400/20.000
1150029	ONKA-9868	C PRINTED	400/20.000
1150030	ONKA-9869	D PRINTED	400/20.000
1150031	ONKA-9870	E PRINTED	400/20.000
1150032	ONKA-9871	F PRINTED	400/20.000
1150033	ONKA-9872	G PRINTED	400/20.000
1150034	ONKA-9873	H PRINTED	400/20.000
1150035	ONKA-9874	I PRINTED	400/20.000
1150036	ONKA-9875	J PRINTED	400/20.000
1150037	ONKA-9876	K PRINTED	400/20.000
1150038	ONKA-9877	L PRINTED	400/20.000
1150040	ONKA-9879	M PRINTED	400/20.000
1150041	ONKA-9880	N PRINTED	400/20.000
1150042	ONKA-9881	O PRINTED	400/20.000
1150043	ONKA-9882	P PRINTED	400/20.000
1150045	ONKA-9884	R PRINTED	400/20.000
1150046	ONKA-9885	S PRINTED	400/20.000
1150048	ONKA-9887	T PRINTED	400/20.000
1150049	ONKA-9888	U PRINTED	400/20.000
1150050	ONKA-9889	V PRINTED	400/20.000
1150051	ONKA-9890	W PRINTED	400/20.000
1150052	ONKA-9891	X PRINTED	400/20.000
1150053	ONKA-9892	Y PRINTED	400/20.000
1150054	ONKA-9893	Z PRINTED	400/20.000
1150039	ONKA-9878	Mp PRINTED	400/20.000
1150024	ONKA-9863	+ PRINTED	400/20.000
1150021	ONKA-9860	– PRINTED	400/20.000
1150047	ONKA-9886	⏚ PRINTED	400/20.000
1150023	ONKA-9862	~ PRINTED	400/20.000
1150044	ONKA-9883	Q PRINTED	400/20.000
1150026	ONKA-9865	AC PRINTED	400/20.000

KCG TYPE CABLE MARKER


NO:2 — 1,50 - 2,50 mm²

NEW CODE	OLD CODE	DESCIRIPTIONS	BOX
1150004	ONKA-9846	0 PRINTED	400/20.000
1150005	ONKA-9847	1 PRINTED	400/20.000
1150057	ONKA-9896	2 PRINTED	400/20.000
1150058	ONKA-9897	3 PRINTED	400/20.000
1150059	ONKA-9898	4 PRINTED	400/20.000
1150060	ONKA-9899	5 PRINTED	400/20.000
1150061	ONKA-9900	6 PRINTED	400/20.000
1150062	ONKA-9901	7 PRINTED	400/20.000
1150063	ONKA-9902	8 PRINTED	400/20.000
1150064	ONKA-9903	9 PRINTED	400/20.000
1150072	ONKA-9911	A PRINTED	400/20.000
1150073	ONKA-9912	B PRINTED	400/20.000
1150074	ONKA-9913	C PRINTED	400/20.000
1150075	ONKA-9914	D PRINTED	400/20.000
1150076	ONKA-9915	E PRINTED	400/20.000
1150077	ONKA-9916	F PRINTED	400/20.000
1150078	ONKA-9917	G PRINTED	400/20.000
1150079	ONKA-9918	H PRINTED	400/20.000
1150080	ONKA-9919	I PRINTED	400/20.000
1150081	ONKA-9920	J PRINTED	400/20.000
1150082	ONKA-9921	K PRINTED	400/20.000
1150086	ONKA-9925	L PRINTED	400/20.000
1150088	ONKA-9927	M PRINTED	400/20.000
1150089	ONKA-9928	N PRINTED	400/20.000
1150090	ONKA-9929	O PRINTED	400/20.000
1150091	ONKA-9930	P PRINTED	400/20.000
1150093	ONKA-9932	R PRINTED	400/20.000
1150094	ONKA-9933	S PRINTED	400/20.000
1150096	ONKA-9935	T PRINTED	400/20.000
1150097	ONKA-9936	U PRINTED	400/20.000
1150098	ONKA-9937	V PRINTED	400/20.000
1150099	ONKA-9938	W PRINTED	400/20.000
1150100	ONKA-9939	X PRINTED	400/20.000
1150101	ONKA-9940	Y PRINTED	400/20.000
1150102	ONKA-9941	Z PRINTED	400/20.000
1150087	ONKA-9926	Mp PRINTED	400/20.000
1150068	ONKA-9907	+ PRINTED	400/20.000
1150065	ONKA-9904	– PRINTED	400/20.000
1150095	ONKA-9934	⏚ PRINTED	400/20.000
1150067	ONKA-9906	~ PRINTED	400/20.000
1150092	ONKA-9931	Q PRINTED	400/20.000
1150071	ONKA-9910	AC PRINTED	400/20.000

NO:3 — 4,00 - 6,00 mm²

NEW CODE	OLD CODE	DESCIRIPTIONS	BOX
1150002	ONKA-9844	0 PRINTED	400/20.000
1150003	ONKA-9845	1 PRINTED	400/20.000
1150105	ONKA-9944	2 PRINTED	400/20.000
1150106	ONKA-9945	3 PRINTED	400/20.000
1150107	ONKA-9946	4 PRINTED	400/20.000
1150108	ONKA-9947	5 PRINTED	400/20.000
1150109	ONKA-9948	6 PRINTED	400/20.000
1150110	ONKA-9949	7 PRINTED	400/20.000
1150111	ONKA-9950	8 PRINTED	400/20.000
1150112	ONKA-9951	9 PRINTED	400/20.000
1150119	ONKA-9958	A PRINTED	400/20.000
1150120	ONKA-9959	B PRINTED	400/20.000
1150121	ONKA-9960	C PRINTED	400/20.000
1150122	ONKA-9961	D PRINTED	400/20.000
1150123	ONKA-9962	E PRINTED	400/20.000
1150124	ONKA-9963	F PRINTED	400/20.000
1150125	ONKA-9964	G PRINTED	400/20.000
1150126	ONKA-9965	H PRINTED	400/20.000
1150127	ONKA-9966	I PRINTED	400/20.000
1150128	ONKA-9967	J PRINTED	400/20.000
1150129	ONKA-9968	K PRINTED	400/20.000
1150130	ONKA-9969	L PRINTED	400/20.000
1150132	ONKA-9971	M PRINTED	400/20.000
1150133	ONKA-9972	N PRINTED	400/20.000
1150134	ONKA-9973	O PRINTED	400/20.000
1150135	ONKA-9974	P PRINTED	400/20.000
1150137	ONKA-9976	R PRINTED	400/20.000
1150138	ONKA-9977	S PRINTED	400/20.000
1150140	ONKA-9979	T PRINTED	400/20.000
1150141	ONKA-9980	U PRINTED	400/20.000
1150142	ONKA-9981	V PRINTED	400/20.000
1150143	ONKA-9982	W PRINTED	400/20.000
1150144	ONKA-9983	X PRINTED	400/20.000
1150145	ONKA-9984	Y PRINTED	400/20.000
1150146	ONKA-9985	Z PRINTED	400/20.000
1150131	ONKA-9970	Mp PRINTED	400/20.000
1150116	ONKA-9955	+ PRINTED	400/20.000
1150113	ONKA-9952	– PRINTED	400/20.000
1150139	ONKA-9978	⏚ PRINTED	400/20.000
1150115	ONKA-9954	~ PRINTED	400/20.000
1150136	ONKA-9975	Q PRINTED	400/20.000
1150001	ONKA-9843	AC PRINTED	400/20.000

MARKING LABER SLOT FOR CABLES

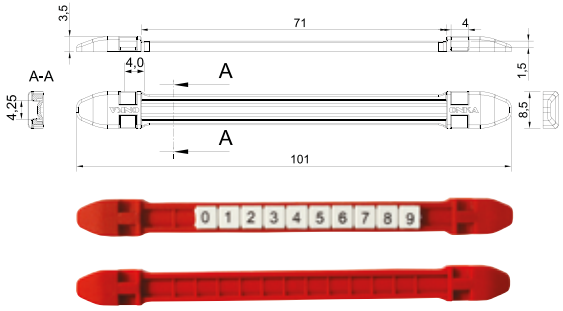



TECHNICAL DATA	
Material	PA6.6
Temp.	-40 ºC, +140 ºC

ACCESSORIES		SEE PAGE
Marking	9540 / 9541	Pg. 179
Cable Ties	8480 / 8483	Pg. 161

	NEW CODE	OLD CODE	DESCIRIPTIONS	BOX
●	1150154	ONKA-7134	This product can be used with 2.5 - 3.6 mm cable ties and small numberings. Isolation can be provided with heat-shrink macaron.	50
●	1150155	ONKA-7135		
●	1150156	ONKA-7136		
●	1150157	ONKA-7137		
●	1150158	ONKA-7138		
○	1150159	ONKA-7139		

PLASTIC TAGS FOR CABLE TIES





CODE	WIDTH	LENGTH	BOX
ONKA-8560	33	12	100
ONKA-8561	44	19	100

CABLE TIE PORTER



İRPSET-3014



İRPSET-3015



İRPSET-3016




İRPSET-3017


CODE	DESCIRIPTIONS	BOX
İRPSET-3014	PANEL SIGNAL LABEL 30x14 mm	100
İRPSET-3015	PANEL SIGNAL LABEL 27x12 mm	100
İRPSET-3016	PANEL SIGNAL LABEL 27x18 mm	100
İRPSET-3017	PANEL SIGNAL LABEL 27x12 mm	100

PANEL MARKER (SELF-ADHESIVE AND SCREWED)







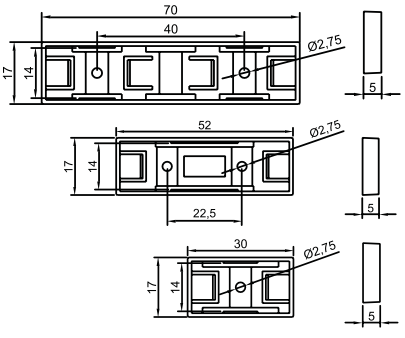


TECHNICAL DATA	
Material	PA6.6
Temperature	-40 ºC, +140 ºC

NEW CODE	OLD CODE	DESCIRIPTIONS	PCS/ BOX
1130001	ONKA - 7114	17 x 30 mm Panel Marker	100
1130002	ONKA - 7115	17 x 52 mm Panel Marker	100
1130003	ONKA - 7116	17 x 70 mm Panel Marker	50

PANEL MARKER (SELF-ADHESIVE, 1 MT.)






TECHNICAL DATA	
Material	PVC
Temperature	-40 ºC, +140 ºC

NEW CODE	OLD CODE	DESCIRIPTIONS	PCS/ BOX
1130007	ONKA - 7126	15 mm x 1000 mm Adhesive Panel Marker	50

AUTOMAT LABEL (ADHESIVE, 2 MT.)

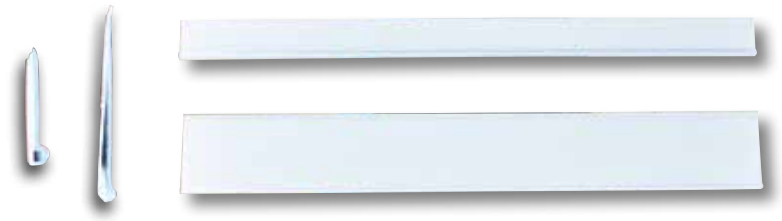

CODE	DESCIRIPTIONS	PCS/ BOX
İRPTY-21200	21 x 2000 mm Adhesive Panel Label	200
İRPTY-30200	30 x 2000 mm Adhesive Panel Label	150
İRPTY-40200	40 x 2000 mm Adhesive Panel Label	150

PANEL LABEL LEG




APPLICATION PLACE

CODE	DESCIRIPTIONS	COLOR	PCS/BOX
İRPAY-1001	PLASTIC LEG	RAL 7035	200

MRK - OPK LIGHTNING WARNING SIGN



Order No: 1287



1287




TECHNICAL DATA	
Material	PA6.6
Temperature	-40 ºC, +140 ºC
Printing Colour	Black

ACCESSORIES		SEE PAGE
Marking	9540 / 9541	Pg. 177



Order No: 1288



1288





NEW CODE	OLD CODE	DESCIRIPTIONS	PCS/BOX
1060074	ONKA - 1287	MRK Marker (Screw Cover)	1000
1060075	ONKA - 1288	OPK Marker (Screw Cover)	1000

MRK - OPK MARKER SLOT



Order N

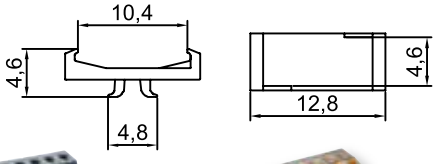





TECHNICAL DATA	
Material	PA6.6
Temperature	-40 ºC, +140 ºC

ACCESSORIES		SEE PAGE
Marking	8943-S11	Pg. 169

NEW CODE	OLD CODE	DESCIRIPTIONS	PCS/BOX
1060076	ONKA - 1289	MRK - OPK	1000

TERMINAL SERIES WITH SOCKET

3.81 mm FEMALE



3.81 mm MALE (180°)



3.81 mm MALE (90°)



3.81 mm MALE CABLE CONNECTOR



5.08 mm FEMALE



5.08 mm UPRIGHT FEMALE




TERMINAL SERIES WITH SOCKET (5.08 mm)


5.08 mm MALE 90 WITHOUT SIDE PANELS




5.08 mm MALE 180 WITHOUT SIDE PANELS

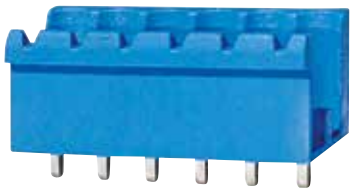

5.08 mm MALE 90°

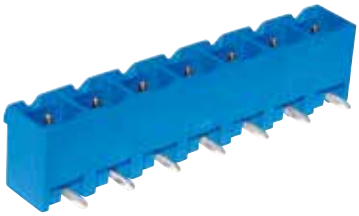

5.08 mm MALE 180°



5.08 mm DOUBLED MALE 90°



5.08 mm DOUBLED MALE 180°



TERMINAL SERIES WITH SOCKET (5.08 mm)

5.08 mm MALE CABLE CONNECTOR




7.62 mm FEMALE




7.62 mm UPRIGHT FEMALE



7.62 mm MALE 90°

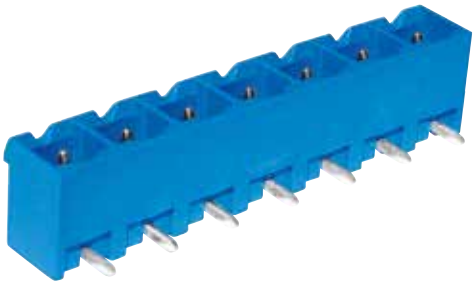

7.62 mm MALE 180°



TERMINAL SERIES WITH SOCKET

7.62 mm DOUBLE MALE 90°



7.62 mm DOUBLE MALE 180°



MODULE TERMINAL SERIES

5.08 mm MODULE



7.62 mm MODULE



9.52 x 7.62 mm MODULE



10.16 x 10.6 mm MODULE



3.81 x 12.7 x 15.24 mm POWER CONNECTOR



SCREWLESS TERMINAL SERIES

5.08 x 7.62 mm SCREWLESS




SMD




CARD SLOT SERIES

72 mm MODULE



72 mm PROFIL

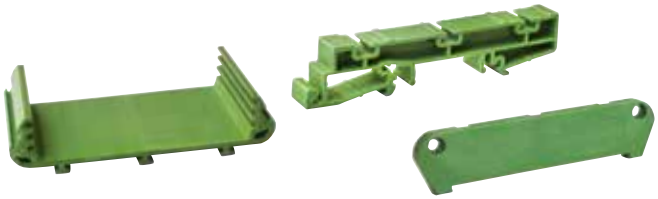

108 mm PROFIL



DISTANCE SERIES

RAIL DISTANS




3.81 CABLE CONNECTOR RAIL DISTANCE



5.08 CABLE CONNECTOR RAIL DISTANCE



FUSE HOLDER

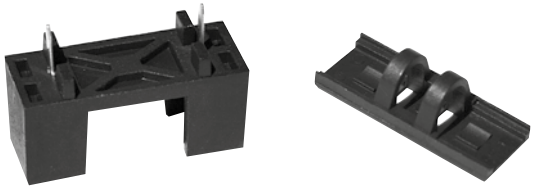








EMERGENCY
STOP






1
2






STOP











REACTIVE POWER FACTOR CONTROLLER





POWER FACTOR CONTROLLER



DIGITAL UNIVERSAL AMMETER

DAM-A-72



DAM-A-48



DIGITAL VOLTMETER

DV-72-03



DV-96-03



MULTIMETER





DIGITAL PROTECTOR & MULTIMETER







VOLTAGE PROTECTION RELAYS







TIME RELAYS





MONOPHASE SERIES



THREE PHASE SERIES



CEE NORM SERIES



HANGING ENERGY DISTRIBUTION BOX



3 WAY GROUP SOCKET SERIES



COMBITANITON SERIES



METAL & PLASTIC BUTTON BOX SERIES



METAL & PLASTIC ENCLOSURE BOX SERIES



METAL & PLASTIC CABLE REEL SERIES



TECHNICAL DETAILS

TS EN 60529 IP PROTECTION CLASSES				TS EN 62262 Degrge of Shock Protection	
First Number	Protection against Solids	Second Number	Protection against Solids no	IK	Degree of Shock protection
0	Protection against Solids no protection	0	no protection	00	0
1	Protection against solid objects larger than 50mm	1	Protection against steep drops of water	01	0,15
2	Protection against solid objects larger than 12,5mm	2	Protection against water drops have a vertical angle of 15 degrees	02	0,20
3	Protection against solid objects larger than 1mm	3	Protection against water drops have a vertical angle of 15 degrees	03	0,35
4	Protection against solid objects larger than 2,5mm	4	Protection against water drops from all directions	04	0,50
5	Protection against dust	5	Protection against water squirts from all directions	05	0,70
6	Full protection against dust	6	Full protection against strong sea waves	06	1
-		7	Full protection against the effects of sinking	07	2
-	-	8	Protection against the effects of prolonged immersion under specified conditions	08	5
-	-	-	-	(1)	6
-	-	-	-	09	10
-	-	-	-	10	20

Current Carrying Capacity of Standard Terminal Blocks and Tightening Torque Table for Screw Terminal Blocks				
Size mm^2	Size AWG/kcmil	Current Carrying Capacity Amper	Screw Size (Metric)	Tightening Torque (Nm)
0,2	24	4	.	.
0,34	22	5	.	.
0,5	20	6	.	.
0,75	18	9	.	.
1	.	13,5	.	.
1,5	16	17,5	2,5	0,4
2,5	14	24	2,5	0,4
4	12	32	3	0,5
6	10	41	3,5	0,8
10	8	57	3,5	0,8
16	6	76	5	2
25	4	101	.	.
35	2	125	5	2
50	0	150	8	6
70	00	192	8	6
95	000	232	8	6
-	0000	-	-	-
120	250 kcmil	269	8	6
150	300 kcmil	309	-	-
185	350 kcmil	353	-	-
240	500 kcmil	425	-	-
300	600 kcmil	520	-	-

SOURCE : Directives of EMO-2020 and EN 60947-7-1

Metric size ISO mm²	Comprason Between AWG/kcmil and Metric Sizes	
	Size AWG/kcmil	Equivalent Metric Space
0,2	24	0,205
0,34	22	0,324
0,5	20	0,519
0,75	18	0,82
1	.	.
1,5	16	1,3
2,5	14	2,1
4	12	3,3
6	10	5,3
10	8	8,4
16	6	13,3
25	4	21,2
35	2	33,6
50	0	53,5
70	0	67,4
95	0	85
-	0	107,2
120	250 kcmil	127
150	300 kcmil	152
185	350 kcmil	177
240	500 kcmil	253
300	600 kcmil	304

Relationship Between Declared Cross Section of Terminal Blocks and Declared Connection Capacity			
Cross Section		The cross section that the terminal can connect according to EN 60947-7-1	
mm²	AWG	mm²	AWG
0,2	24	0,2	24
0,34	22	0,2-0,34	24-22
0,5	20	0,2-0,34-0,5	24-22-20
0,75	18	0,34-0,5-0,75	22-20-18
1	-	0,5-0,75-1	-
1,5	16	0,75-1-1,5	20-18-16
2,5	14	1-1,5-2,5	18-16-14
4	12	1,5-2,5-4	16-14-12
6	10	2,5-4-6	14/12/10
10	8	4-6-10	12-10-8
16	6	6-10-16	10-8-6
25	4	10-16-25	8-6-4
35	2	16-25-35	6-4-2

TECHNICAL SPECIFICATIONS OF THE H05 CABLE USED IN THE PANEL

NYAF	Nominal Cross Section	Cable Outer Diameter	Net Weight	Maximum Current Carrying Capacity		Length
	mm²	mm	kg/km	Pipe	Air	mt
H05-VK	0,5	2	9	….	12	100
	0,75	2,2	11	…	15	100
	1	2,5	14	….	19	100
H07-VK	1,5	2,8	19	14,5	24	100
	2,5	3,5	30	19,5	32	100
	4	4	44	26	42	100
	6	4,4	62	34	54	100
	10	5,7	110	46	73	100
	16	7,2	167	61	98	100
	25	8,6	262	80	129	100
	35	10,2	350	99	158	1000
	50	12,2	510	119	198	1000
	70	13,9	677	151	245	1000
	95	15,7	891	182	292	1000
	120	17,5	1109	210	344	1000
	150	19,2	1371	240	391	1000
	185	21,1	1695	273	448	1000
	240	23,5	…	320	528	1000

SOURCE : Directives of EMO-2020 and EN 60947-7-1

COPPER BUSBARS TECHNICAL DETAILS (ENVIRONMENTAL TEMPERATURE 35 C - HEATING 30 ºC)

SIZES	CROSS SECTION	WEIGHT	PLATED BUSBAR QUANTITY				UN-PLATED BUSBAR QUANTITY			
mm	mm²	kg/mt	1	2	3	4	1	2	3	4
12x2	23,5	0,209	125	225	-	-	110	200	-	-
15x2	29,5	0,262	155	270	-	-	140	240	-	-
15x3	44,5	0,396	185	330	-	-	170	300	-	-
20x2	39,5	0,351	205	350	-	-	185	315	-	-
20x3	59,5	0,529	245	425	-	-	220	380	-	-
20x5	99,1	0,882	325	560	-	-	295	500	-	-
25x3	74,5	0,663	300	520	-	-	270	460	-	-
25x5	124	1,11	395	670	-	-	350	600	-	-
30x3	89,5	0,796	355	610	-	-	315	540	-	-
30x5	149	1,33	450	780	-	-	400	700	-	-
40x3	119	1	460	790	-	-	420	710	-	-
40x5	199	1,77	600	1000	-	-	520	900	-	-
40x10	399	3,55	850	1500	2060	2800	760	1350	1850	2500
50x5	249	2,22	720	1220	1750	2300	630	1100	1650	2100
50x10	499	4,44	1030	1800	2450	3330	920	1600	2250	3000
60x5	299	2,66	850	1430	1950	2650	760	1250	1760	2400
60x10	599	5,33	1200	2100	2800	3700	1060	1900	2600	3500
80x5	399	3,55	1070	1900	2500	3200	970	1700	2300	3000
80x10	799	7,11	1560	2500	3300	4500	1380	2300	3100	4200
100x5	499	4,44	1350	2300	3000	3800	1200	2050	2850	3500
100x10	999	8,89	1880	3100	4000	5400	1700	2800	3650	5000
120x10	1200	10,7	2200	3500	4500	6100	2000	3100	4100	5700
160x10	1600	14,2	2800	4400	5800	7800	2500	3900	5300	7300
200x10	2000	17,8	3350	5300	6900	9400	3000	4750	6350	8800

ALUMINUM BUSBARS TECHNICAL DETAILS (ENVIRONMENTAL TEMPERATURE 35 C - HEATING 30 ºC)

SIZES	CROSS SECTION	WEIGHT	PLATED BUSBAR QUANTITY				UN-PLATED BUSBAR QUANTITY			
mm	mm²	kg/mt	1	2	3	4	1	2	3	4
12x2	23,5	0,0633	95	170	-	-	75	135	-	-
15x2	29,5	0,0795	120	205	-	-	90	160	-	-
15x3	44,5	0,12	140	250	-	-	110	200	-	-
20x2	39,5	0,107	155	265	-	-	1150	210	-	-
20x3	59,5	0,161	185	325	-	-	140	255	-	-
20x5	99,1	0,268	245	420	-	-	185	330	-	-
25x3	74,5	0,201	230	390	-	-	170	315	-	-
25x5	124	0,335	295	510	-	-	220	410	-	-
30x3	89,5	0,242	265	435	-	-	195	365	-	-
30x5	149	0,403	340	595	-	-	255	475	-	-
40x3	119	0,323	350	600	-	-	265	475	-	-
40x5	199	0,538	435	760	-	-	330	620	-	-
40x10	399	1,08	635	1140	1570	2140	490	925	1280	1700
50x5	249	0,673	530	920	1330	1760	405	740	1070	1430
50x10	499	1,35	780	1370	1860	2530	595	1090	1520	2050
60x5	299	0,808	635	1100	1520	2020	475	855	1240	1640
60x10	599	1,62	910	1600	2170	2890	695	1260	1800	2380
80x5	399	1,08	835	1430	1900	2470	645	1110	1570	2120
80x10	799	2,16	1190	2030	2720	3600	890	1620	2240	3000
100x5	499	1,35	1030	1790	2330	2950	780	1370	1900	2470
100x10	999	2,7	1440	2420	3250	4100	1100	1950	2650	3500
100x15	1500	4,04	1760	2900	3800	4900	1400	2400	3200	4200
120x10	1200	3,24	1710	2850	3650	4750	1300	2280	3100	4100
120x15	1800	4,86	2070	3360	4400	5400	1550	2750	3700	4750
160x10	1600	4,32	2200	3600	4750	5900	1650	2850	3950	5050
160x15	2400	6,47	2600	4250	5450	7050	2000	3400	4600	5950
200x10	2000	5,4	2850	4600	5900	7500	2150	3650	4950	6400
200x15	3000	8,09	3300	5200	6550	8200	2550	4200	5600	7300

SOURCE : Directives of EMO-2020 and EN 60947-7-1

HEAT SHRINK TUBE					
PRODUCT CODE	CROSS SECTION BEFORE SHRINKING (mm)	CROSS SECTION AFTER SHRINKING (mm)	SUITABILITY TO THE RECTANGULAR BUSBARS (mm)	SUITABILITY TO THE CABLE AND CABLE LUGS SINGLE CORD (mm^2)	ROLL AMOUNT (mt)
MAK 01.5	1,5	0,75		Suitability	200
MAK 02.5	2,5	1,25		0,5-0,75	200
MAK 03.5	3,5	1,75		0,75-1-1,5	200
MAK 04.5	4,5	2,25		1,5-2,5	100
MAK 05.0	5	2,5		2,5	100
MAK 06.0	6	3		4-6	100
MAK 07.0	7	3,5		6	100
MAK 08.0	8	4		6-10	100
MAK 10	10	5		10-16	100
MAK 12	12	6		10-16	100
MAK 13	13	6,5	12X2-15X2-15X3	16-25	100
MAK 16	16	8	20X2-20X3	16-25-35-50	100
MAK 18	18	9	20X5	35-50	100
MAK 20	20	10	20X5-25X3-25X5	70	100
MAK 22	22	11	25X5-30X3-30X5	70-95	100
MAK 25	25	12,5	25X5-30X3-30X5	70-95	50
MAK 28	28	14	40X3	70-95	50
MAK 30	30	15	40X3-40X5	120	50
MAK 32	32	16	30X10-40X5	120-150	50
MAK 35	35	17,5	30X10-40X5-40X10	150	50
MAK 38	38	19	40X5-40X10	185-240	50
MAK 40	40	20	50X5	185-240-300	50
MAK 45	45	22,5	50X5-50X10	240-300-400	25
MAK 50	50	25	60X5-60X10	400	25
MAK 60	60	30	80X5-80X10		25
MAK 70	70	35	100X5-100X10		25
MAK 80	80	40	100X5-100X10		25
MAK 90	90	45	100X10		25
MAK 100	100	50	120X10		25
MAK 120	120	60	120X10-160X10		25
MAK 150	150	75	160X10		25

THE COLOR CODE PREFFERED SHOULD BE ADDED TO THE PRODUCT CODE									
11 BLACK	12 YELLOW/ GREEN	13 RED	14 YELLOW	15 BLUE	16 GREEN	17 GREY	18 BROWN	19 WHITE	20 TRANSPARENT

CONNECTION DATA (EN 60947-7-1 / 8.3.3.2)

Product	Conductor cross section flexible, without ferrule min.	Conductor cross section flexible, without ferrule max.	Conductor cross section flexible, with ferrule min.	Conductor cross section flexible, with ferrule max.	Conductor cross section standard min.	Conductor cross section standard max.	Conductor cross section flexible, with twin ferrules.
MRK 1.5 mm²	0.34 mm²	2.5 mm²	0,34 mm²	2.5 mm²	0.50 mm²	2.5 mm²	2x0.75 mm²
MRK 2.5 mm²	0.34 mm²	4 mm²	0,34 mm²	4 mm²	0.50 mm²	4 mm²	2x0.75 mm²
MRK 4 mm²	0.34 mm²	6 mm²	0.34 mm²	6 mm²	0.50 mm²	6 mm²	2x0.75 mm²
MRK 6 mm²	1.5 mm²	10 mm²	0.34 mm²	10 mm²	1.5 mm²	10 mm²	…
MRK 10 mm²	0.75 mm²	16 mm²	0.34 mm²	16 mm²	1 mm²	16 mm²	2x4 mm²
MRK 16 mm² SLIM	1.5 mm²	25 mm²	0.34 mm²	25 mm²	1 mm²	25 mm²	2x6 mm²
MRK 35 mm² SLIM	10 mm²	50 mm²	4 mm²	35 mm²	4 mm²	35 mm²	2x16 mm²
MRK 50 mm²	16 mm²	70 mm²	6 mm²	50 mm²	10 mm²	70 mm²	2x16 mm²
MRK 70 mm²	16 mm²	95 mm²	6 mm²	95 mm²	16 mm²	95 mm²	2x16 mm²
MRK 95 mm²	25 mm²	120 mm²	10 mm²	95 mm²	16 mm²	120 mm²	2x16 mm²
MRK 120 mm²	35 mm²	120 mm²	16 mm²	120 mm²	25 mm²	….	2x16 mm²
MRK 2.5 mm² SLIM	0.34 mm²	2.5 mm²	0,34 mm²	2.5 mm²	0.50 mm²	4 mm²	2x1 mm²
MRK 4 mm² SLIM	0.34 mm²	6 mm²	0,34 mm²	6 mm²	0.50 mm²	6 mm²	2x1.5 mm²
MRK 16 mm² SLIM	1.5 mm²	25 mm²	0.34 mm²	25 mm²	1 mm²	25 mm²	2x6 mm²
MRK 35 mm² SLIM	10 mm²	50 mm²	4 mm²	35 mm²	4 mm²	35 mm²	2x16 mm²
MRK-D 2.5 mm²	0.34 mm²	4 mm²	0.34 mm²	4 mm²	0.50 mm²	4 mm²	2x1 mm²
MRK-D 4 mm²	0.34 mm²	6 mm²	0.34 mm²	6 mm²	0.50 mm²	6 mm²	2x1.5 mm²
MRK-S 6 mm²	0.34 mm²	10 mm²	0.34 mm²	10 mm²	0.50 mm²	10 mm²	2x2.5 mm²
TRANSPER CONNECTORS (18)	0.34 mm²	16 mm²	0.34 mm²	16 mm²	0.50 mm²	16 mm²	…
TRANSPER CONNECTORS (23)	0.34 mm²	16 mm²	0.34 mm²	16 mm²	0.50 mm²	16 mm²	…
MRK 6 mm² TEST	0.75 mm²	10 mm²	0.34 mm²	10 mm²	0.50 mm²	10 mm²	2x2.5 mm²
MRK 6 mm² TEST DISCONNECT	1 mm²	10 mm²	0.34 mm²	10 mm²	0.50 mm²	10 mm²	2x2.5 mm²
MRK 10 mm² TEST DISCONNECT	0.75 mm²	16 mm²	0.34 mm²	10 mm²	0.50 mm²	16 mm²	2x4 mm²
MTK 2.5 mm²	0.34 mm²	4 mm²	0.34 mm²	4 mm²	0.50 mm²	4 mm²	2x1 mm²
MTK 4 mm²	0.34 mm²	6 mm²	0.34 mm²	6 mm²	0.50 mm²	6 mm²	2x1.5 mm²
MTK 10 mm²	2.5 mm²	16 mm²	0.34 mm²	16 mm²	1 mm²	16 mm²	2x4 mm²
MTK 16 mm²	2.5 mm²	25 mm²	0.5 mm²	25 mm²	1 mm²	25 mm²	2x6 mm²
MTK 35 mm²	6 mm²	50 mm²	4 mm²	35 mm²	4 mm²	35 mm²	2x16 mm²
OPK 1.5 mm²	0.34 mm²	2.5 mm²	0.34 mm²	2.5 mm²	0.50 mm²	2.5 mm²	2x0.75 mm²(*WPS)
OPK 2.5 mm²	0.34 mm²	4 mm²	0.34 mm²	4 mm²	0.50 mm²	4 mm²	2x1 mm²(*WPS)
OPK 4 mm²	0.34 mm²	6 mm²	0.34 mm²	4 mm²	0.50 mm²	6 mm²	2x1.5 mm²
OPK 6 mm²	0.34 mm²	10 mm²	0.34 mm²	10 mm² (*WPS)	0.50 mm²	10 mm²	2x2.5 mm²
OPK 10 mm²	0.34 mm²	16 mm²	0.34 mm²	16 mm² (*WPS)	0.50 mm²	16 mm²	2x4 mm²
OPK 16 mm²	0.34 mm²	25 mm²	0.34 mm²	25 mm²	0.50 mm²	25 mm²	2x6 mm²
OPK 35 mm²	0.34 mm²	50 mm²	0.34 mm²	35 mm²	0.50 mm²	50 mm²	2x10 mm²
OPK 2.5 mm² SLIM	0.34 mm²	2.5 mm²	0.34 mm²	2.5 mm²	0.50 mm²	2.5 mm²	2x0.75 mm²(*WPS)
OPK 4 mm² SLIM	0.34 mm²	4 mm²	0.34 mm²	4 mm²	0.50 mm²	4 mm²	2x1 mm²(*WPS)
OPK-D 2.5 mm²	0.34 mm²	4 mm²	0.34 mm²	4 mm²	0.50 mm²	4 mm²	2x1 mm²(*WPS)
OPK-D 4 mm²	4 mm²	6 mm²	0.34 mm²	6 mm² (*WPS)	1.5 mm²	6 mm²	2x1.5 mm² (*WPS)
OPK-T 2.5 mm²	1 mm²	4 mm²	0.34 mm²	4 mm² (*WPS)	0.50 mm²	4 mm²	2x1 mm²(*WPS)
OPK-T 4 mm²	4 mm²	6 mm²	0.34 mm²	6 mm² (*WPS)	1.5 mm²	6 mm²	2x1.5 mm² (*WPS)
OPK-S 2.5 mm²	0.34 mm²	4 mm²	0.34 mm²	4 mm²	0.50 mm²	4 mm²	2x1 mm²(*WPS)
OPK 2.5 mm² (1IN-2OUT)	1.5 mm²	4 mm²	0.34 mm²	4 mm²	0.50 mm²	4 mm²	2x1 mm²(*WPS)
OPK 2.5 mm² (2IN-2OUT)	0.34 mm²	4 mm²	0.34 mm²	4 mm²	0.50 mm²	4 mm²	2x1 mm²(*WPS)
OPK 2.5 mm² (2IN-2OUT)	1.5 mm²	4 mm²	0.34 mm²	4 mm²	0.50 mm²	4 mm²	2x1 mm²(*WPS)
OTK 4 mm²	1 mm²	6 mm²	0.34 mm²	6 mm²	0.50 mm²	6 mm²	2x1.5 mm² (*WPS)
OTK 10 mm²	0.5 mm²	16 mm²	0.34 mm²	16 mm² (*WPS)	0.50 mm²	16 mm²	2x4 mm² (*WPS)
MPK 2.5 mm²	0.34 mm²	4 mm²	0.34 mm²	4 mm² (*WPS)	0.50 mm²	4 mm²	2x1 mm²(*WPS)
MP 2.5 mm²	2.5 mm²	4 mm²	0.34 mm²	4 mm²	0.50 mm²	4 mm²	2x1 mm²(*WPS)
MPK(T)2.5 mm²	0.75 mm²	4 mm²	0.34 mm²	4 mm²	1 mm²	4 mm²	2x1 mm²(*WPS)

***WPS (Without Plastic Sleeve)**



SERTİFİKA

ISO 9001:2015'e göre
yönetim sistemi

ONKA ELEKTRİK MALZEMELERİ
SAN. VE TİC. LTD. ŞTİ.
GEPOSB İçi Cumhuriyet Cad. No:27
Gebze Kocaeli Türkiye

Elektrik Bağlantı Elemanları, Ray Klemensleri, Sıra
Klemensleri, Kablo Pabuçları Tasarımı, Üretimi Ve Satışı



CERTIFICATE

for the management system
according to ISO 9001:2015

ONKA ELEKTRİK MALZEMELERİ
SAN. VE TİC. LTD. ŞTİ.
GEPOSB İçi Cumhuriyet Cad. No:27
Gebze Kocaeli Turkey

Scope

Design, Production and Sales of Electric Connectors, Rail
Terminal Connectors, Terminal Strips and Cable Lugs





TÜRK STANDARDLARI ENSTİTÜSÜ
TÜRK STANDARDLARINA UYGUNLUK BELGESİ
TURKISH STANDARDS INSTITUTION
CERTIFICATE OF CONFORMITY TO TURKISH STANDARDS



TÜRK STANDARDLARI ENSTİTÜSÜ
TÜRK STANDARDLARINA UYGUNLUK BELGESİ
TURKISH STANDARDS INSTITUTION
CERTIFICATE OF CONFORMITY TO TURKISH STANDARDS

BELGE NUMARASI *REFERENCE NUMBER OF LICENCE*	007895-TSE-01/01
BELGENİN İLK VERİLİŞ TARİHİ *DATE OF FIRST ISSUE OF LICENCE*	14.07.2009
BELGENİN SON GEÇERLİLİK TARİHİ *LICENCE VALID UNTIL*	12.10.2022
BELGE SAHİBİ KURULUŞUN ADI *NAME OF THE LICENCE HOLDER*	ONKA ELEKTRİK MALZEMELERİ SAN.VE TİC.LTD.ŞTİ.
BELGE SAHİBİ KURULUŞUN ADRESİ *ADRESS OF THE LICENCE HOLDER*	Y.DUDULLU MH.KEYAP SAN.SİT.E 1 BLK. NO:77 /3 ÜMRANİYE İSTANBUL/TÜRKİYE
ÜRETİM YERİ ADI *NAME OF THE MANUFACTURING PLACE*	ONKA ELEKTRİK MALZEMELERİ SANAYİ VE TİCARET LİMİTED ŞİRKETİ
ÜRETİM YERİ ADRESİ *ADRESS OF THE MANUFACTURING PLACE*	İNÖNÜ MAH. BALÇIK KÖYÜ YOLU ÜZERİ GEP.OSB SANAYİ SİT. İÇİ CUMHURİYET CAD. NO:27 GEBZE KOCAELİ / TÜRKİYE
İPTAL EDİLEN BELGE NUMARASI (Varsa) *INDICATION OF SUPERSEDED LICENCE (if any)*	14.0.30.4.34.00/TSE-65459
TESCİLLİ TİCARİ MARKASI *REGISTERED TRADE MARK*	ONKA
İLGİLİ TÜRK STANDARDI *RELATED TURKISH STANDARD*	TS EN 60947-7-1 / 13.12.2011 – TS EN 60947-1 / 02.03.2010
BELGE KAPSAMI *SCOPE OF LICENCE*	"ONKA" MARKA, MPK SERİSİ ; BEYAN KESİTİ 1.5 mm2 (DAHİL)DEN 120 mm2 (DAHİL)E KADAR , BEYAN YALITIM GERİLİMİ 600 V DAN 1000 V A KADAR, VİDALI TİP SIKIŞTIRMA TERTİBATLI, RAY ÜZERİNE GEÇMELİ TEK KUTUPLU BAĞLAMA DİZİNİ (RAY KLEMENS)

e-imzalı/e-signed
20.01.2022
Belgelendirme Merkezi Başkanı Adına
AHMET NURSİ KARTAL
TSE İSTANBUL BELGELENDİRME MÜDÜRÜ

1 / 1



CERTIFICATE OF COMPLIANCE



CERTIFICATE OF COMPLIANCE

Certificate Number	20130501-E351153
Report Reference	E351153-20130430
Issue Date	2013-MAY-01
Issued to:	ONKA ELEKTRİK MALZ SAN VE TİC LTD STİ GEBZE PLASTİKÇİLER O.S.B CUMHURİYET CAD, NO, 27 41400 TURKEY
This is to certify that representative samples of	COMPONENT - TERMINAL BLOCKS Cat, Nos, OPK-2,5, OPK-4, OPK-C 2,5, OPK-C 4
	Have been investigated by UL in accordance with the Standard(s) indicated on this Certificate.
Standard(s) for Safety:	UL 1059 & CSA C22.2 No. 158, Terminal Blocks
Additional Information:	See the UL Online Certifications Directory at www.ul.com/database for additional information

Only those products bearing the UL Recognized Component Mark for the U.S. and Canada should be considered as being covered by UL's Recognition and Follow-Up Service and meeting the appropriate U.S. and Canadian requirements.

The UL Recognized Component Mark for the U.S. generally consists of the manufacturer's identification and catalog number, model number or other product designation as specified under "Marking" for the particular Recognition as published in the appropriate UL Directory. As a supplementary means of identifying products that are Recognized Components, the UL Recognized Component Mark for Canada may be applied. This mark may be used in conjunction with the required Recognized Mark. The Recognized Component Mark is required when specified in the UL Directory preceding the recognitions or under "Markings" for the individual recognitions. The UL Recognized Component Mark for Canada consists of the UL Recognized Mark for Canada and the manufacturer's identification and catalog number, model number or other product designation as specified under "Marking" for the particular Recognition as published in the appropriate UL Directory.

Recognized components are incomplete in certain constructional features or restricted in performances capacities and are intended for use in equipments submitted for investigation rather than for direct separate installation in the field. The final acceptance of the component is dependent upon its installation and use in complete equipment submitted to UL LLC.

Look for the UL Recognized Component Mark on the product.

Page 1 of 1



VDE Prüf- und Zertifizierungsinstitut

ZEICHENGENEHMIGUNG
MARKS APPROVAL

VDE



VDE Prüf- und Zertifizierungsinstitut

ZEICHENGENEHMIGUNG
MARKS APPROVAL

VDE

Onka®

Choice Of Professionals

Catalogue

Linkedin

www.Onka.com.tr

[BUDAK] Matbacılık, Tasarım, Reklam ve Organizasyon Limited Şirketi
MAY 2022
www.budakmatbaa.com